
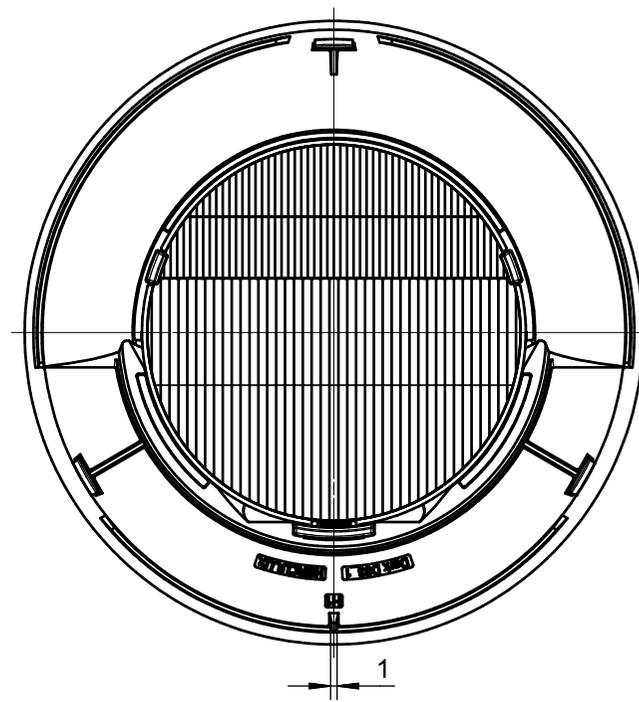


透镜上表面
(防眩角30度)

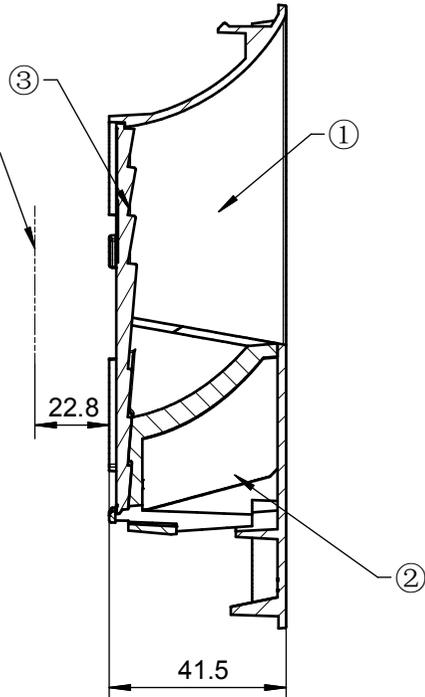

技术要求:
1、未注圆角及拔模斜度按3D图。
2、未注尺寸公差按右表。
3、表面无飞边, 缩水, 气泡等缺陷。

*4、灯具采用胶圈防水时: 要求散热器与胶圈的接触面的粗糙度: Ra<3.2μm

Technical remark:

- Fillet and inclination not indicated according to 3D drawing.
- Dimensional tolerances not indicated are shown in the right list.
- The surface has no flash, shrinkage, bubbles and other defects.
- When the lamp adopts rubber ring for waterproofing: the roughness of the contact surface between the radiator and the rubber ring is required: Ra<3.2μm

表 List	
基本尺寸 Basic size	公差值 Tolerance value
<3	±0.10
3~10	±0.15
10~24	±0.20
24~65	±0.35
65~140	±0.50
140~250	±0.80
250~450	±1.20
>450	±2.00

序号 Item	物料编码 Part No.	产品名称 Title	产品编号 Drawing No.	材料 Material:	数量 quantity				
①	1.07.23374_01	HK 黑光D83防眩罩1_01	HK-HG-145@42-0916-S	PC 电镀(黑色)	1				
②	1.07.23374_02	HK 黑光D83防眩罩1反射部件_02	HK-HG-101@40-0917-S	PC 镀铝(无底)	1				
③	1.07.23374_03	HK 黑光D83洗墙片1	HK-HG-90@05-0918-O	PC+扩散剂	1				
			出光角度范围 Beam angle range	透过率 Transmittance					
			最小K值 Min K value	点胶类型 Gel type					
			模具等级 Mold level	备注 Remark					
			见图面						
2			4						
1			3						
序号 Item	更改标记 Change mark	更改内容 Change content	更改日期 Change date	签名 Signature	序号 Item	更改标记 Change mark	更改内容 Change content	更改日期 Change date	签名 Signature
		光学设计 Optical design					Title: HK 黑光D83防眩罩1	Drawing No. HK-HG-145@42-0916-S_ASM	
		结构设计 Structural design						Part No. 1.07.23374	
		审核 Verify					CDHK		
		审定 Approval			材料 Material:	组件			