


透镜上表面 (防眩角30度)
On the surface of the lens
(Anti glare angle 30 degrees)

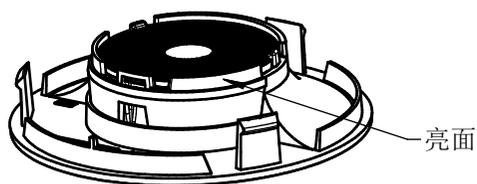

技术要求:

- 1、未注圆角及拔模斜度按3D图。
- 2、未注尺寸公差按右表。
- 3、表面无飞边, 缩水, 气泡等缺陷。
- *4、灯具采用胶圈防水时: 要求散热器与胶圈的接触面的粗糙度: Ra<3.2μm

Technical remark:

- 1.Fillet and inclination not indicated according to 3D drawing.
2. Dimensional tolerances not indicated are shown in the right list.
3. The surface has no flash, shrinkage, bubbles and other defects.
- *4. When the lamp adopts rubber ring for waterproofing: the roughness of the contact surface between the radiator and the rubber ring is required: Ra<3.2μm

序号 Item	物料编码 Part No.	产品名称 Title	产品编号 Drawing No.	材料 Material:	数量 quantity
①	1.07.23381_01	HK 黑光D35防眩罩_01	HK-HG-68@16-0923-S	PC 电镀	1
②	1.07.23295_02	HK 黑光D35防眩罩13反射部件_02	HK-HG-38@14-0887-O	PC 镀铝 (无底)	1
③	1.07.23295_03	HK 黑光D35洗墙片A	HK-HG-35@02-0888-O	PC	1

出光角度范围 Beam angle range	透过率 Transmittance
最小K值 Min K value	点胶类型 Gel type
模具等级 Mold level	备注 Remark

见图面

表 List	
基本尺寸 Basic size	公差值 Tolerance value
<3	±0.10
3~10	±0.15
10~24	±0.20
24~65	±0.35
65~140	±0.50
140~250	±0.80
250~450	±1.20
>450	±2.00

序号 Item	更改标记 Change mark	更改内容 Change content	更改日期 Change date	签名 Signature	序号 Item	更改标记 Change mark	更改内容 Change content	更改日期 Change date	签名 Signature
2					4				
1					3				
光学设计 Optical design		Title:			Drawing No.		HK-HG-68@16-0923-S_ASM_A		
结构设计 Structural design		HK 黑光D35防眩罩14_A			Part No.		1.07.23381_A		
审核 Verify		材料 Material:			组件		CDHK		
审定 Approval									