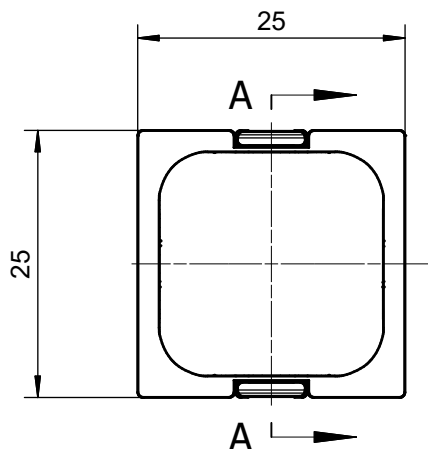

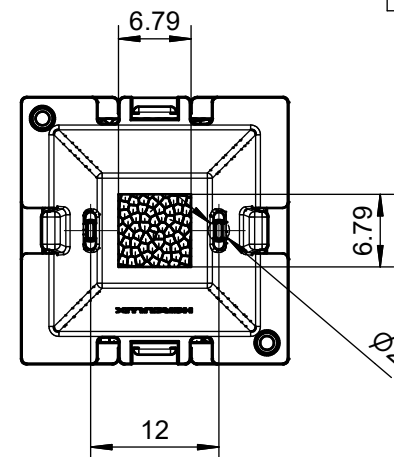
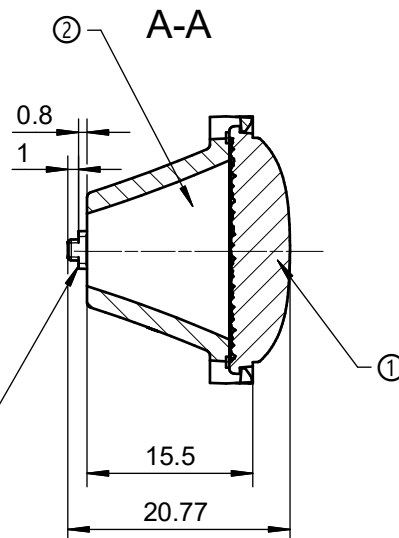


LED基板上表面
Top surface of LED substrate

技术要求:

- 1、未注圆角及拔模斜度按3D图。
- 2、未注尺寸公差按右表。
- 3、表面无飞边，缩水，气泡等缺陷。

*4、灯具采用胶圈防水时：要求散热器与胶圈的接触面的粗糙度： $Ra < 3.2\mu m$

A Technical remark:

- 1.Fillet and inclination not indicated according to 3D drawing.
2. Dimensional tolerances not indicated are shown in the right list.
- 3, The surface has no flash, shrinkage, bubbles and other defects.
- *4. When the lamp adopts rubber ring for waterproofing: the roughness of the contact surface between the radiator and the rubber ring is required: $Ra < 3.2\mu m$

基本尺寸范围	公差值
Basic size	Tolerance value
<3	± 0.1
3~10	± 0.15
10~24	± 0.20
24~65	± 0.35
65~140	± 0.50
140~250	± 0.80
250~450	± 1.2
>450	± 2.0

序号 Item	物料编码 Part No.	产品名称 Title	产品编号 Drawing No.	材料 Material:	数量 quantity				
①	1.01.54440_01	HK 萤火-星空-40G-单颗-80度线性灯透镜_01 HK Firefly-Starry-40G-single-80° Linear lamp lens_01	HK-YH XK-25@07-1508-0	PMMA	1				
②	1.01.54440_02	HK 萤火-星空-40G-单颗-线性灯反光杯_02 HK Firefly-Starry-40G-single-Linear lamp reflector cup_02	HK-YH XK-25@17-1509-0	PC 镀铝 PC aluminizing	1				
③									
			出光角度范围 Beam angle range	透 过 率 Transmittance					
			最小 K 值 Min K value	点胶类型 Gel type					
			模 具 等 级 Mold level	备 注 Remark					
2			4						
1			3						
序号 Item	更改标记 Change mark	更改内容 Change content	更改日期 Change date	签 名 Signature	序号 Item	更改标记 Change mark	更改内容 Change content	更改日期 Change date	签 名 Signature
光 学 设 计 Optical design			Title:		Drawing No.				
结 构 设 计 Structural design			HK 萤火-星空-40G-单颗-80度线性灯光学组件 HK Firefly-Starry-40G-single-80° Linear lamp optical module		HK-YH XK-25@21-80-4X3030-#0-1g-1_ASM				
审 核 Verify					Part No.				
审 定					1.01.54440-S				
			材料 Material		CDHK				
			组件 component						