



HERCULUX
恒坤光电

Chengdu HercuLux Photoelectric
Technology Co.,Ltd
Product Approval

Approval number:

Customer:

Product: HK DA30 Double Asymmetric Film

Material Code 1.20.M0005 (Different product sizes have different material codes)

PN: HK-M-00@DA30-PET25-LxW-O

Manufacturer: Chengdu HercuLux Photoelectric Technology Co.,Ltd



Supplier confirmation				Client confirmation			
Proposed		DATE		Qualified ☐		DATE	
Project manager		DATE		Unqualified ☐		DATE	
Audit		DATE		Audit		DATE	
Approved		DATE		Approved		DATE	
Stamp		DATE		Stamp		DATE	

(Confirmation of acceptance by both parties must be signed and sealed)

Factory: Chengdu Shuangliu District, lot industrial park 2 road HercuLux Photoelectric Park

Phone: 028-85887727 (801) 028-85887990 (801)

Fax: 028-85887730

<http://www.herculux.com/>

Sales Dept: Shenzhen Nanshan District Nanshan Cloud Valley Innovation Industrial Park Comprehensive Service Building,

TEL: 0755-2937 1541

FAX: 0755-2907 5140

*Approval In duplicate, for both supplier and customer.

Please use this product within the permitted range and environment according to the structure and material of the product. If the usage exceeds the recommended value, please test and verify by yourself. If the product is damaged due to out-of-range use, our company will not be responsible for the warranty.

Product material:

Customized products: The specifications and models of materials used are subject to the agreement between the two parties.

Conventional products: As a product that we continuously research and improve, under the premise of ensuring the quality and availability of the product, our company reserves the right to change the material. If the material specification and model change, without prior notice.

product data:

The measurement data and dimensional tolerances of the 2D drawings in the product data sheet of this acknowledgement are for reference only, and the final size shall prevail in kind.

The measurement data presented in this acknowledgment is a performance test of the product based on our company's internal test conditions and quality requirements, and the reported data is a typical value of the average results of multiple measurements. Therefore, in some cases, the actual product may deviate from the data provided. We reserve the right to notify you in advance of this data.

Product changes and improvements:


Changes and improvements of customized products are subject to the agreement between the two parties in the contract or technical documents.

As the conventional products that we continue to research and improve, our company reserves the right to make technical changes to its products, and reserves the right to make changes to data resulting from improvements without prior notice.

Operation cautions:

1. Please wear clean gloves during product assembly to prevent product surface contamination.
2. Try to avoid touching the optical surface of the lens when taking the lens.
3. When the surface of the product is polluted, please wipe it gently with a soft cotton cloth dipped in analytically pure neutral solvent. It is forbidden to use industrial solvents (alcohol, isopropanol, acetone, ether, toluene, xylene, carbon tetrachloride, MMA monomer, etc.) wipe.
4. In the storage and use environment should not be exposed to direct sunlight. If the lens turns yellow or cracks due to long-term sunlight exposure, our company will not be responsible for the warranty.

Product Picture:	
Size(L*W*H/Φ*H):	L*W*0.3
Material:	PET25+Optical adhesive
Bending radius:	5mm
Temperature(Topr):	Material extreme temperature resistance: -30°C to +80°C
Ultraviolet resistance:	f1
Fire rating:	\

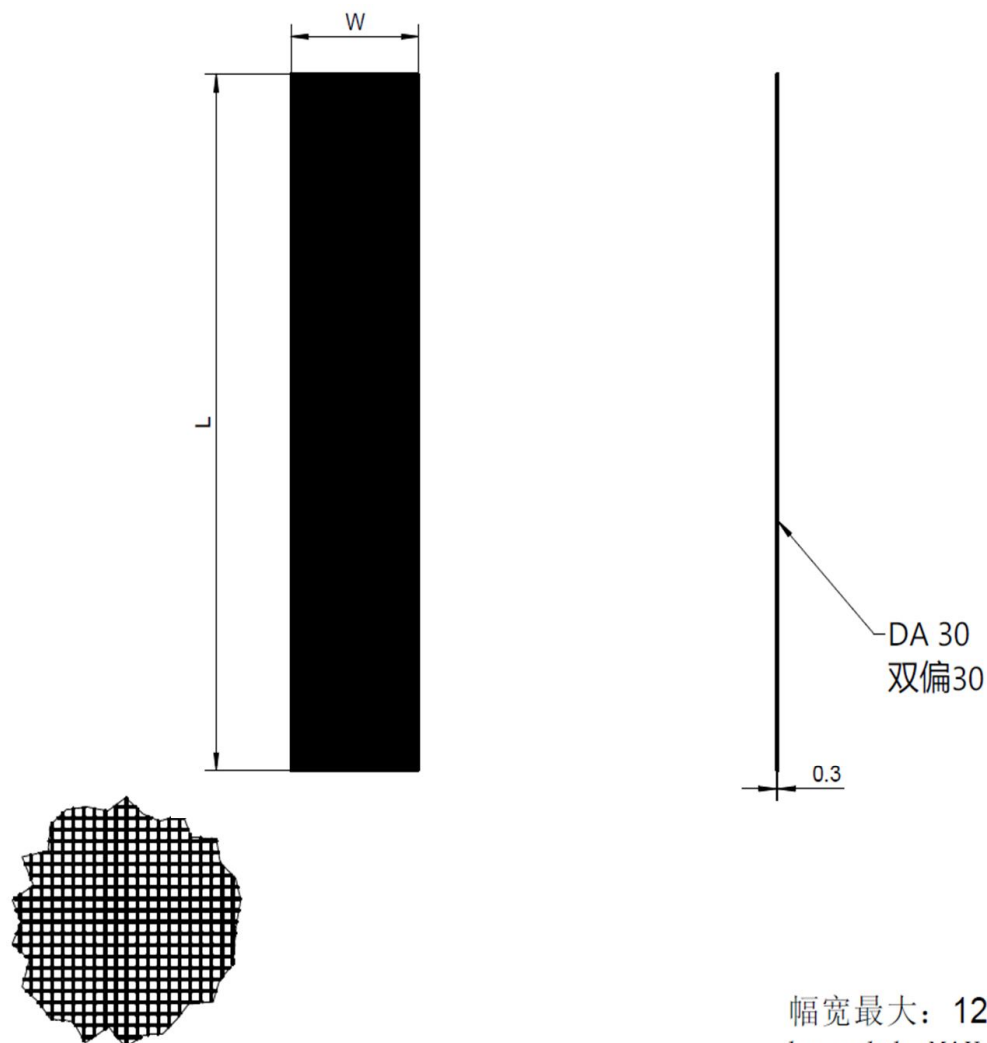

膜微结构面示意
Membrane microstructure plane




幅宽最大: 1200mm
breadth MAX: 1200mm

Technical remark:

1. The 3D map is not indicated for rounded corners and draft angle.
2. The dimensional tolerances are not specified according to GB/T 14486 2008 MT5.
3. The surface has no flash, shrinkage, bubbles and other defects.
- *4. When the lamp adopts rubber ring for waterproofing: the roughness of the contact surface between the radiator and the rubber ring is required: $Ra < 3.2 \mu m$



Note: The L and W dimensions of this product can be customized according to customer needs, the corresponding product L and W dimensions are different, the material code and product model are different.

MT5 Tolerance table (mm)	Basic size	<3	3~10	10~24	24~65	65~140	140~250	250~450	>450
	Tolerance value	± 0.1	± 0.15	± 0.2	± 0.35	± 0.50	± 0.80	± 1.2	± 2.0
	Optical design			HK DA30 Double Asymmetric Film		HK-M-00@DA30-PET25-LxW-O			
	Structure design					1.20.M0005 (Different product sizes have different material codes)			
	Review					Number of drawings	qty	weight	
	Validation			Material:	PET25+Optical adhesive	CDHK			

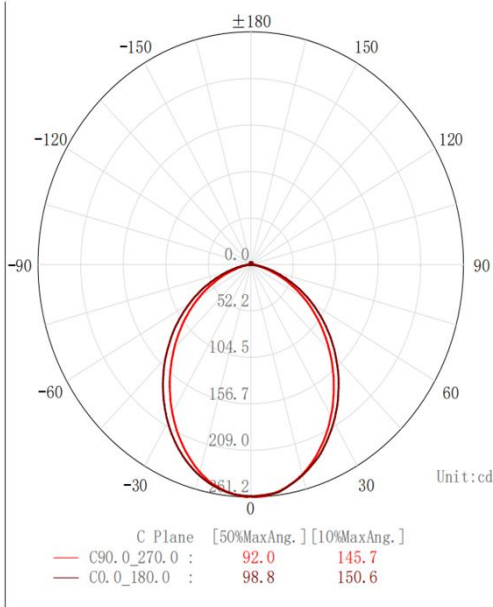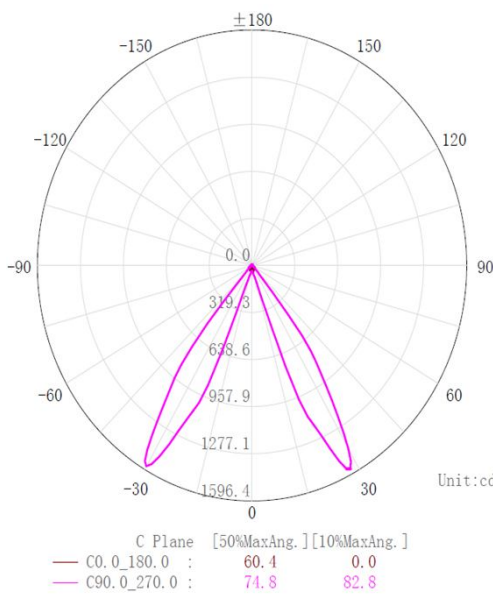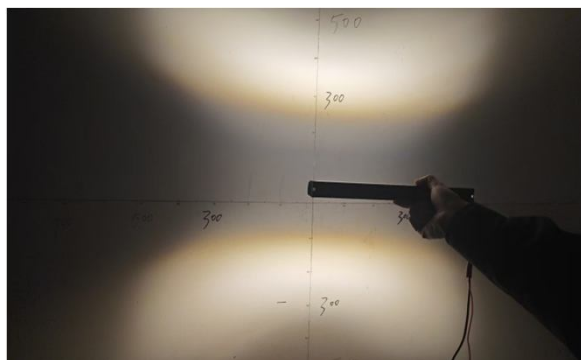material	PET25+Optical adhesive	
Test luminaire	Use regular phenomenon lights	Use Hengkun fluorescent series line lights, basic Angle 20x60 degrees
	Test data	
	membraneless	membranous
angle	92° x98.8°	60.4° x74.8°
Efficiency	96%	
	membraneless	membranous
	 Unit:cd C Plane [50%MaxAng.][10%MaxAng.] — C90.0_270.0 : 92.0 145.7 — C0.0_180.0 : 98.8 150.6	 Unit:cd C Plane [50%MaxAng.][10%MaxAng.] — C0.0_180.0 : 60.4 0.0 — C90.0_270.0 : 74.8 82.8
factogram		

The width of the center corridor is 2M, the height of the shelves is 2.3M, and the height of the lamps is 2.8M

The left side is without double biased film, and the right side is with double biased film. The linear lamp with double biased film can increase the illumination of the shelf in the supermarket while reducing the glare of the pedestrian position

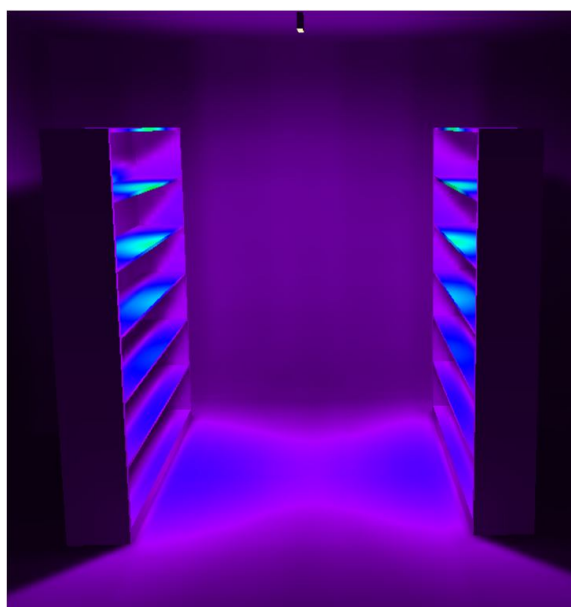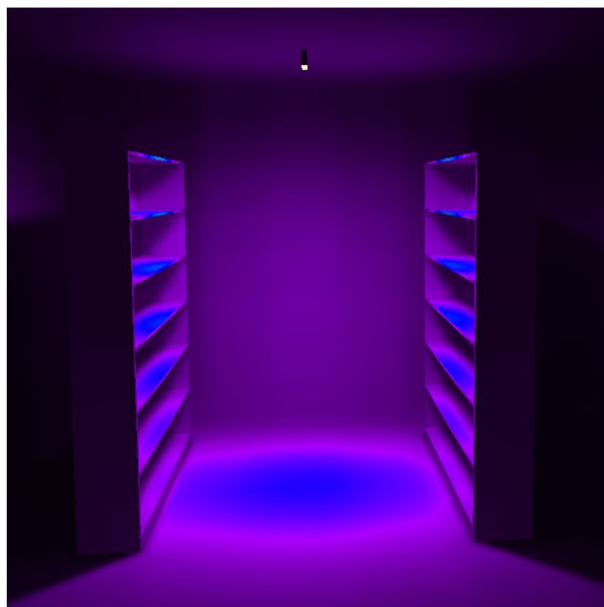

Under the same circumstances, according to the actual shopper's location, UGR is reduced by 20% after adding double biaxial film (equivalent luminous flux calculation).

