



Disc Diffuser SOTE (oxygen transfer efficiency) curve

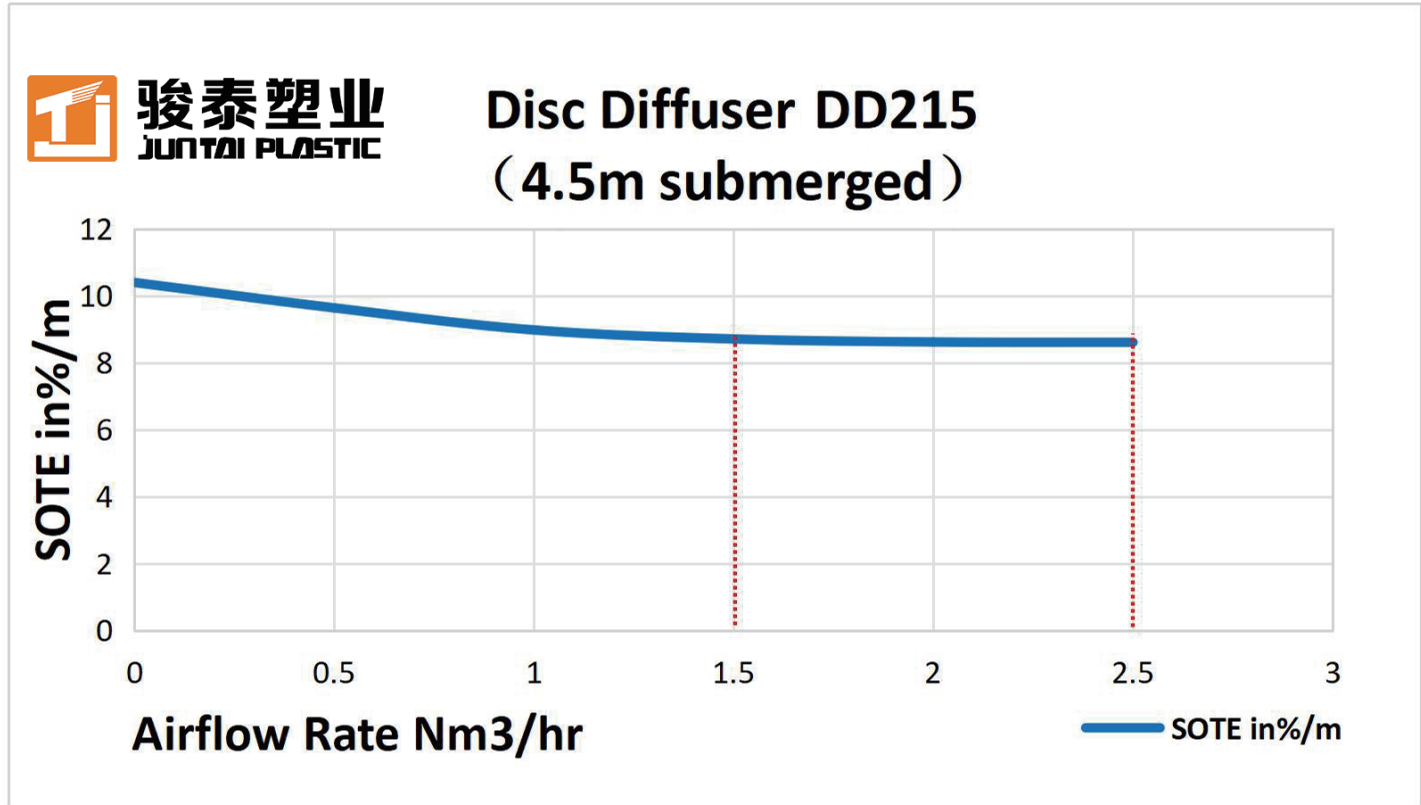


Design Flow	Flow Range	Service Area	Number of Perforations	Service Life	SOTE (6msubmerged)
1.5-2.5 (m3/h)	1.0-5.0 (m3/h)	0.2-0.64 (m2)	4400 (Pcs)	3 - 7 (years)	≥38%

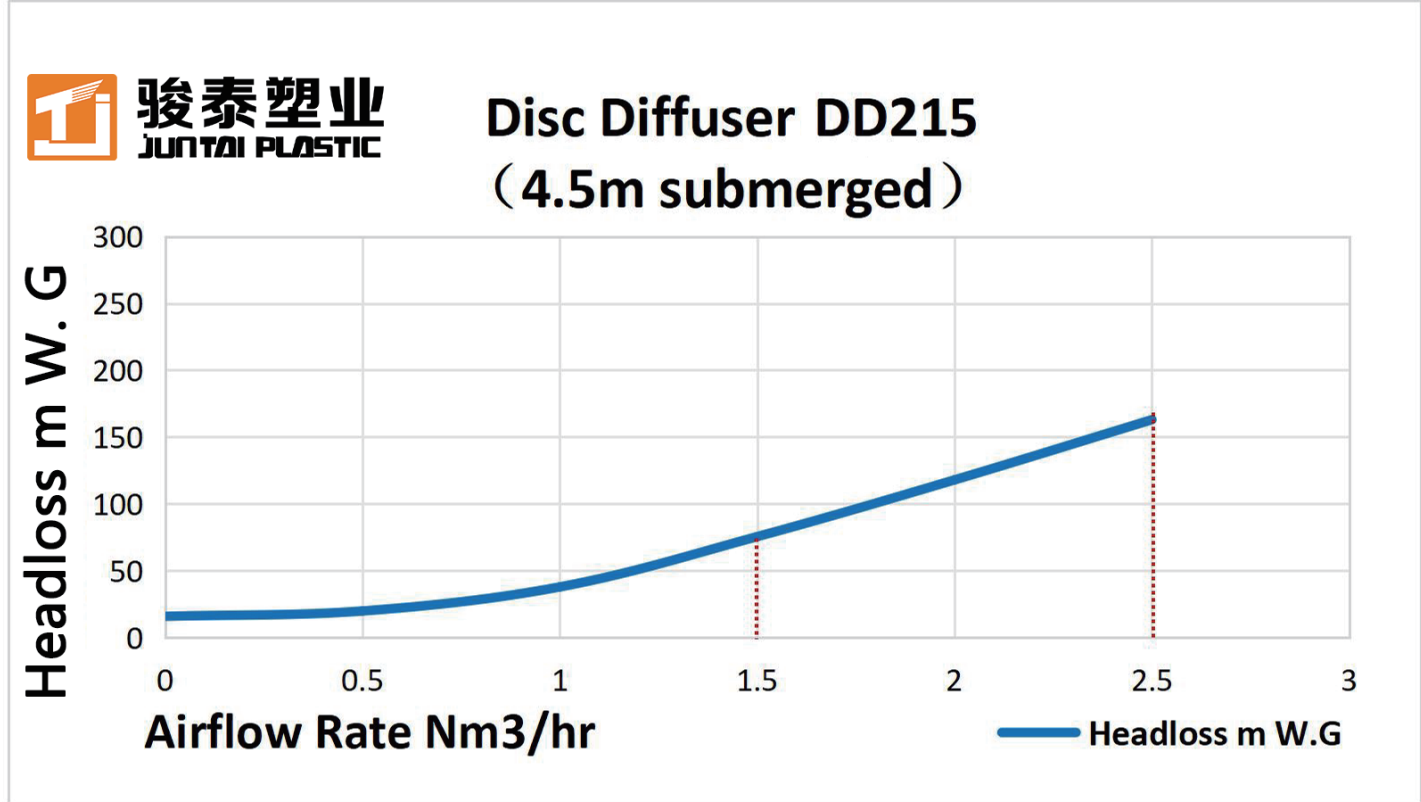


骏泰塑业
JUNTAI PLASTIC

Disc Diffuser DD270 (4.5m submerged)

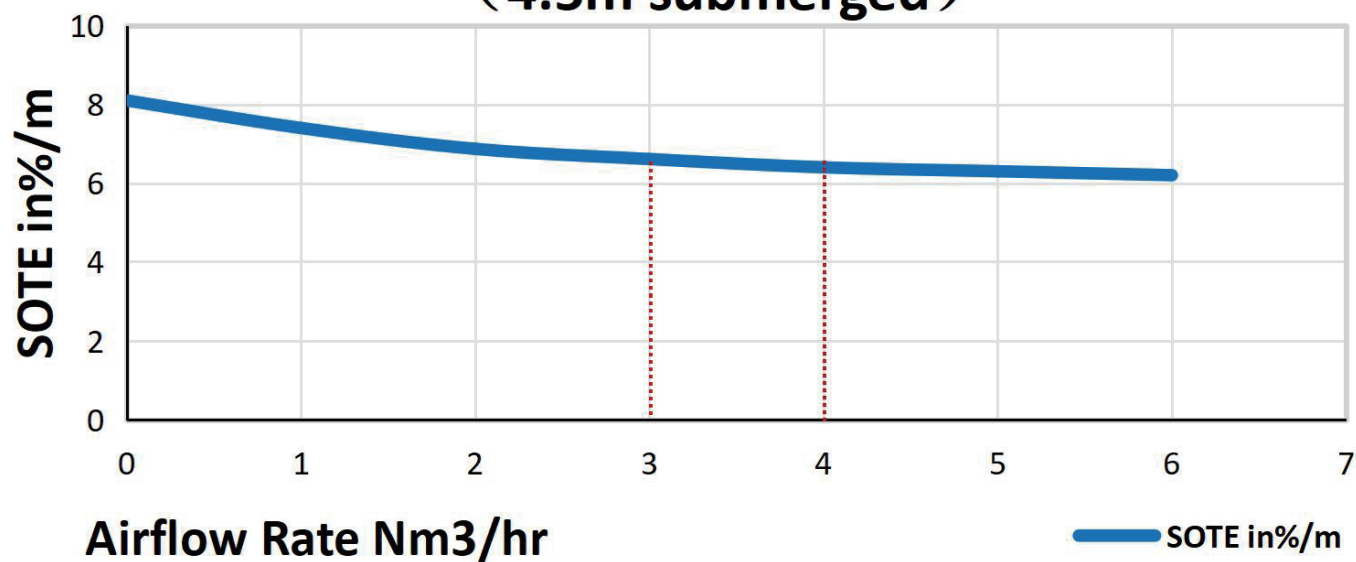


骏泰塑业
JUNTAI PLASTIC

Disc Diffuser DD270 (4.5m submerged)

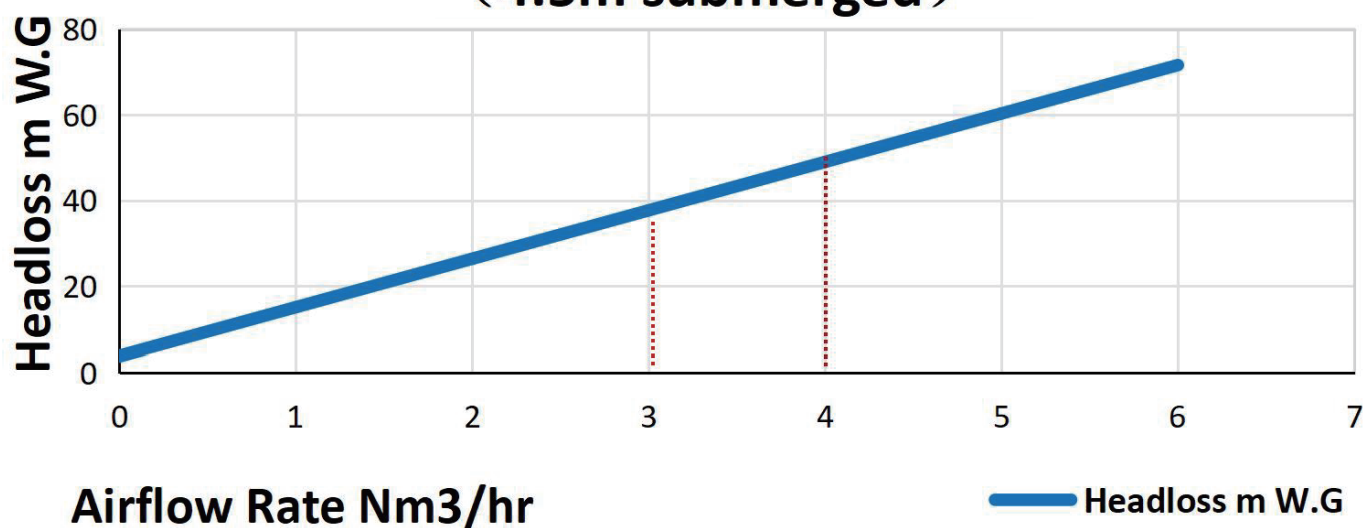


Design Flow	Flow Range	Service Area	Number of Perforations	Service Life	SOTE (6msubmerged)
3.0-4.0 (m3/h)	1.5-8.0 (m3/h)	0.25-1.0 (m2)	6600 (Pcs)	3 - 7 (years)	≥38%

Disc Diffuser DD350 (4.5 submerged)

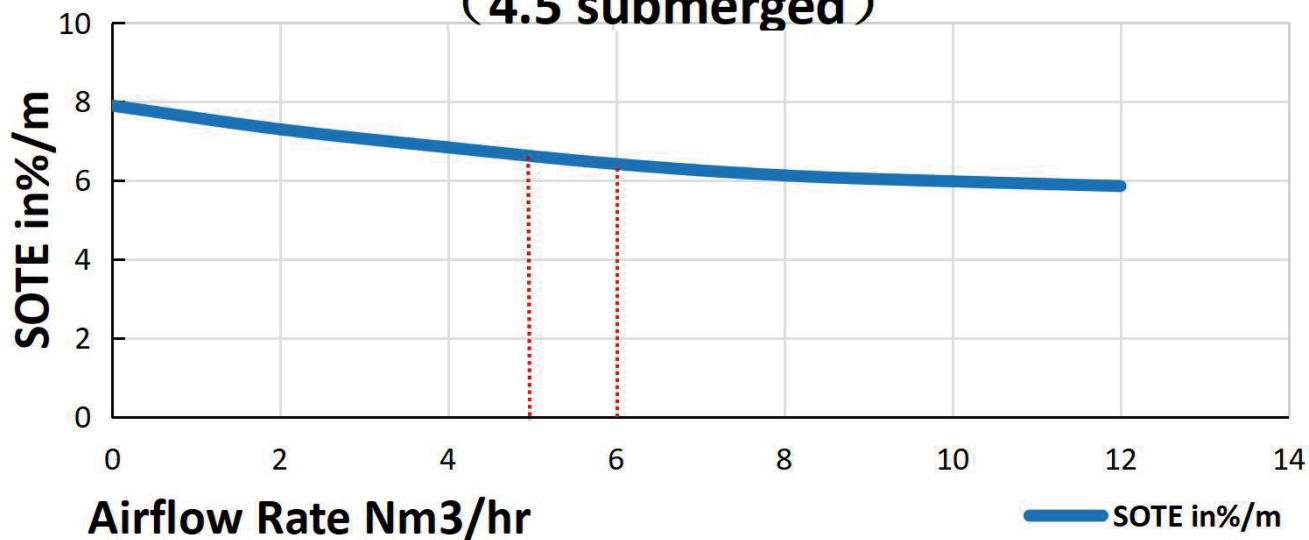

Disc Diffuser DD350 (4.5 submerged)

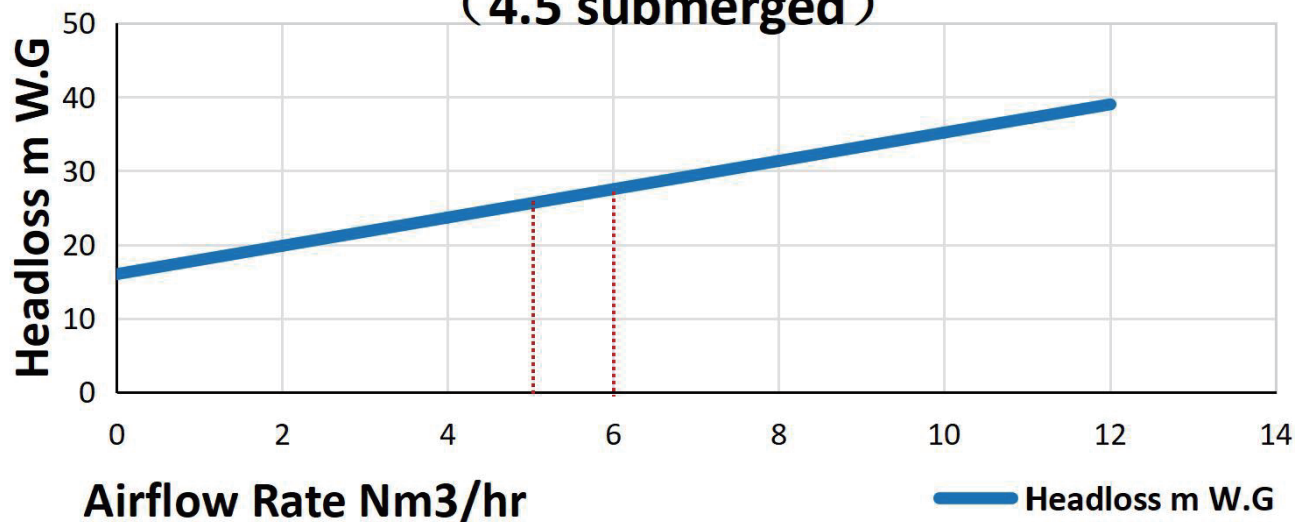

Design Flow	Flow Range	Service Area	Number of Perforations	Service Life	SOTE (6msubmerged)
5.0-6.0 (m3/h)	2.0-12.0 (m3/h)	0.4-1.5 (m2)	11440 (Pcs)	3 - 7 (years)	≥38%