

► **Our Mission:**

To extend the benefits of green energy to all humankind and empower those who strive to achieve their dreams.

► **Our Prospects:**

To become a globally respected energy storage battery manufacturer.

► **Our Vision:**

To serve our customers with a commitment to ensuring their satisfaction and success.

► **Core Value:**

We place the customer at the center, are driven by ambition, view innovation as our soul, and continuously pursue improvement.



www.lvtopsun.com

Guangdong Lvtopsun New Energy Co., Ltd


Email: sales@lvtopsun.com

Website: www.lvtopsun.com

Tel.: (0086)-0769-86985898

Address: Building 13, Silicon Valley Power Digital Valley,
Tangxia Town, Dongguan City, Guangdong Province

©Guangdong Lvtopsun New Energy Co., Ltd. All rights reserved. Lvtopsun is not reliable for damages that may result from any information provided in or omitted from this publication. Under any circumstances, Lvtopsun company reserves the right to make adjustments to this publication at any time, without notice or obligation.

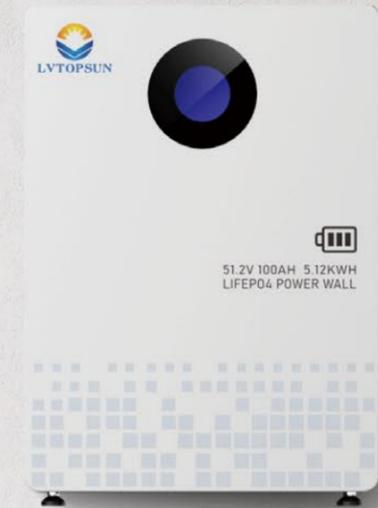

**GUANGDONG LVTOPSUN
NEW ENERGY CO., LTD**

LITHIUM BATTERY SOLUTIONS PROVIDER

www.lvtopsun.com

CONTENTS

ABOUT LVTOPSUN	
COMPANY PROFILE	01
LVTOPSUN TIMELINE	02
MATCH MAINSTREAM INVERTER	02
PRODUCTION LINE	03
LV-48100-NS/LVTS-512100-NS	04
LVTS-512100-X-G2	06
LVTS-512100-G3	08
LVTS-512200-G3	10
LVTS-512228-G3	12
LVTS-512300-G3	14
LVTS-512314-G3	16
LVTS-512560/LVTS-512628	18
LVTS-512100-X-AI0	20
LVTS-5220-HV-X	22
LVTS-256100	24
LVTS-256200/LVTS-256280	26
LVTS-128100-E/LVTS-128200-E/LVTS-128280-E	28
LVTS-256100-E/LVTS-256200-E	30
LVTS-512314-G4	32
LVTS-512314-HV	34

COMPANY PROFILE




Established in 2008, Guangdong LVTOPSUN new energy Co., Ltd. is a well-known enterprise, dedicated to providing one-stop solution for new energy storage batteries.

As a professional manufacturer, LVTOPSUN is specializing in R&D, production, sales and services of energy storage batteries with over 10 years' experience. We boast a series of world-class production equipment lines with intelligent robotic arms, high precise detection instruments and monitor screen together to ensure the superior quality of batteries.

Our energy storage lithium batteries are renowned for their high quality, long lifetime, and excellent safety. We have already developed business in more than 50 countries covering the districts of Southeast Asia, the Middle East and Africa. In the future, we will continue to expand international markets in Europe and North America based on top-notch materials, advanced production technology, and world-class quality combined.



LVTOPSUN TIMELINE

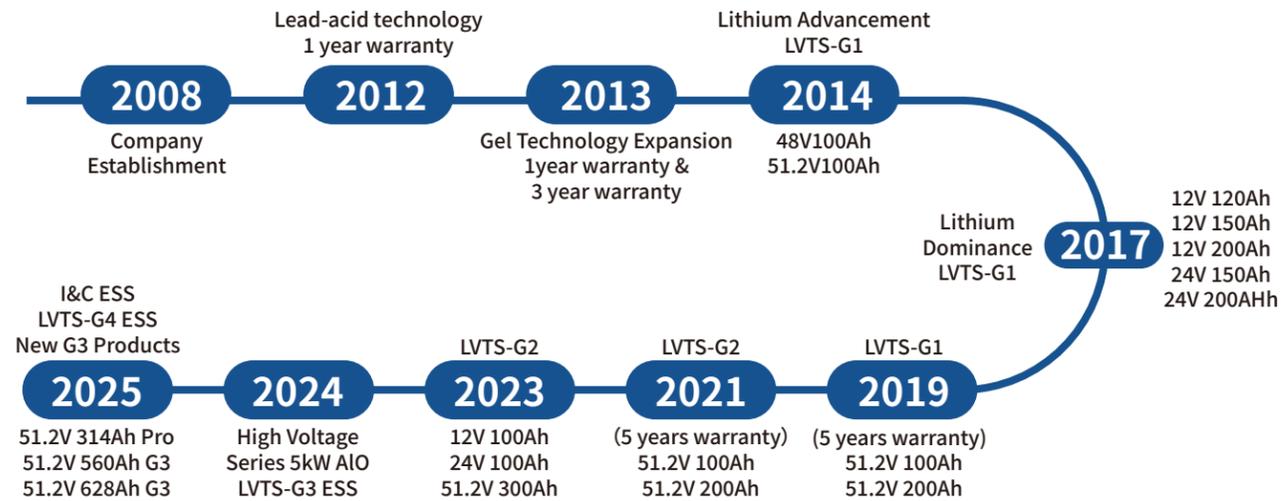

PRODUCTION LINE

LVTOPSUN possesses strong R&D and production capabilities, world-class automation and automatic production line, and high-tech equipment and advanced technology.



MATCH MAINSTREAM INVERTER

SOFAR GOODWE LUXPOWERTEK GROWATT

SMA MEGAREVO Deye LVTOPSUN

MUST solis SRNE SAJI

victron energy BLUE POWER Voltronic Power Advancing Power

More Usable Energy
90% depth of discharge

High Energy
Single cell with 100Ah

Flexible Installation
Wall mounted or floor stand

Indicator light display
Touchscreen-control. Real-time battery status display

Perfect Compatibility
Compatible with mainstream inverter brand

High Expansibility
Max 15 batteries in parallel. Scalable from 5.12kWh to 76.8kWh




Model	LV-48100-NS	LVTS-512100-NS
Performance		
Nominal Voltage	48 Vdc	51.2 Vdc
Nominal Capacity	100 Ah	100 Ah
Battery Energy	4.8 kwh	5.12 kwh
Charge Voltage	52.2~52.65 Vdc	55.68~56.16 Vdc
Discharge Voltage	42.75~52.65 Vdc	45.6~56.16 Vdc
Max Charge Current	50 A	
Max Charge Power	2400 W	2560 W
Max Discharge Current	100 A	
Max Discharge Power	4800 W	5120 W
Short circuit current	350 A	

Communication	
Display	SOC status indicator, LED indicator
Communication	RS232, RS485, CAN

General Specification	
Dimension (WxDxH mm)	440x500x132 mm
Weight (Kg)	40.5 kg 47.3 kg
Installation	Rack mounted or wall mounted
Working Temperature	-20°C~60°C
Storage Temperature	≤25°C, 12 months; ≤35°C, 6 months; ≤45°C, 3 months
Operating /Storage /humidity	≤95%RH
Max Operating Altitude	≤2000m
IP Rating	IP20
Cell Technology	LiFePO ₄ , Lithium Iron Phosphate
Cycle life	6000 Cycles @ 90% DOD/25°C/0.5C, 60% EOL
Warranty	5 years
Scalability	Max 15 batteries in parallel

Ordering and Deliverable Part	
Product ordering part	L48100-NS Battery (cable/wall mount included)
	LVTS-512100-NS Battery (cable/wall mount included)

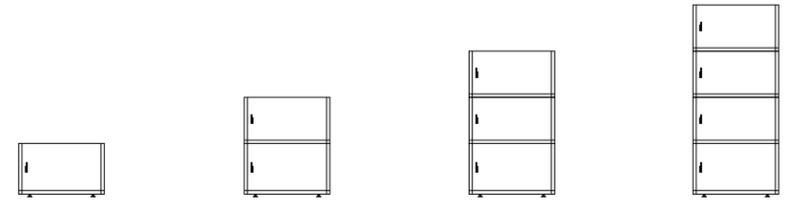

Model	LVTS-512100-1-G2	LVTS-512100-2-G2	LVTS-512100-3-G2	LVTS-512100-4-G2
Performance				
Nominal Voltage	51.2 Vdc			
Nominal Capacity	100 Ah	200 Ah	300 Ah	400 Ah
Battery Energy	5.12 kWh	10.24 kWh	15.36 kWh	20.48 kWh
Charge Voltage	55.68~56.16 Vdc			
Discharge Voltage	45.6~56.16 Vdc			
Max Charge Current	50 A	100 A	150 A	200 A
Max Charge Power	2500 W	5000 W	7500 W	10000 W
Max Discharge Current	100 A	200 A	200 A	200 A
Max Discharge Power	5000 W	10000 W	10000 W	10000 W
Short circuit current	350 A			
Communication				
Display	SOC status indicator, LED indicator			
Communication	RS232, RS485, CAN			
General Specification				
Dimension (WxDxH mm)	620X145X435 MM	620X145X816 MM	620X145X1197 MM	620X145X1578 MM
Weight (kg)	45 kg	87.5 kg	130 kg	172.5 kg
Installation	Ground mounted or wall mounted			
Working Temperature	-20°C~60°C			
Storage Temperature	≤25°C,12 months; ≤35°C,6 months; ≤45°C,3 months			
Operating/Storage /humidity	≤95%RH			
Max Operating Altitude	≤2000m			
IP Rating	IP20			
Cell Technology	LiFePO ₄ , Lithium Iron Phosphate			
Cycle life	8000 Cycles @ 80% DOD/25°C/0.5C, 60% EOL			
Scalability	Max 15 batteries in parallel			
Warranty	10 years			
Ordering and Deliverable Part				
Product ordering part	LVTS 512100 Battery+ Parallel Cable			
	LVTS 512100 Base + Power Cable			



High Efficiency

Full-time 1C discharge



Flexible Installation

Wall mounted or floor stand



High Expansibility

Scalable from 5.12kWh to 76.8kwh



High Energy Density

Proprietary CTP technology



Safe&Reliable

Lithium iron phosphate cell!
Cobalt free



Perfect Compatibility

Compatible with mainstream inverter brand



 More Usable Energy 90% depth of discharge	 High Efficiency Full-time 1C discharge	 Flexible Installation Wall mounted or floor stand
 High Expansibility Scalable from 5.12kWh to 76.8kwh	 Safe&Reliable Lithium iron phosphate cell Cobalt free	 Perfect Compatibility Compatible with mainstream inverter brand

Model	LVTS-512100-G3
Performance	
Nominal Voltage	51.2 Vdc
Nominal Capacity	100 Ah
Battery Energy	5120 Wh
Charge Current	50 A
Charge Power	2560 W
Discharge Current	100 A
Discharge Power	5120 W
Short Circuit Current	350 A
Communication	
Display	Color Touchscreen
Communication	RS232, RS485, CAN
General Specification	
Dimension (WxDxH mm)	440x138x600 mm
Weight (Kg)	47.3 kg
Installation	Floor Stand or Wall Mount
Working Temperature	-20°C~60°C
Operating/Storage Humidity	≤95%RH
Max Operating Altitude	≤2000m
IP Rating	IP20
Cell Technology	LiFePO ₄ , Lithium Iron Phosphate
Cycle life	6000 Cycles @ 90% DOD/25°C/0.5C, 60% EOL
Scalability	Max 15 batteries in parallel
Warranty	5 years
Standard Compliance (More Available Upon Request)	
Certificates	CE, UN38.3
Ordering and Deliverable Part	
Product ordering part	LVTS-512100 Battery (Cable /Wall Mount Included)



More Usable Energy

90% Depth of Discharge



Flexible Investment

Scalable From 10.24 to 645.12 kWh



Safe & Reliable

Lithium Iron Phosphate Cell



Easy Installation

Wall Mounted or Floor Stand



Quick Commissioning

Color Touchscreen



Perfect compatibility

Compatible with DEYE, GOODWE, GROWATT, SOLIS, SOFAR, LUXPOWER, TBB ... Hybrid Inverter

Model	LVTS-512200-G3
Performance	
Nominal Voltage	51.2 Vdc
Nominal Capacity	200 Ah
Battery Energy	10.24 kWh
Charge Voltage	55.68~56.16 Vdc
Discharge Voltage	45.6~56.16 Vdc
Maximum Charge Current	100 A
Maximum Discharge Current	170 A
Maximum Charge Power	5120 W
Max Discharge Power	8704 W
Short circuit current	540 A
Communication	
Display	LED indicator+ LCD Display
Communication	RS232, RS485, CAN
General Specification	
Dimension (WxDxH mm)	465x186x695 mm
Weight (Kg)	83.5 kg
Installation	Floor Stand or Wall Mount
Working Temperature	-20°C~60°C
Storage Temperature	≤25°C, 12 months; ≤35°C, 6 months; ≤45°C, 3 months
Operating /Storage /humidity	≤95%RH
Max Operating Altitude	≤2000m
IP Rating	IP20
Cell Technology	LiFePO ₄ , Lithium Iron Phosphate
Cycle life	6000 Cycles @ 90% DOD/25°C/0.5C, 60% EOL
Warranty	5 years
Scalability	Max 63 batteries in parallel
Ordering and Deliverable Part	
Product ordering part	LVTS-512200 Battery (cable/wall mount included)



More Usable Energy
90% depth of discharge



High Energy
Single cell with 228Ah



High Expansibility
Max 63 batteries in parallel. Scalable from 11.67kWh to 735.43kWh




Flexible Installation
Wall mounted or floor stand



Smart Display Screen
Touchscreen-control. Real-time battery status display



Perfect Compatibility
Compatible with mainstream inverter brand

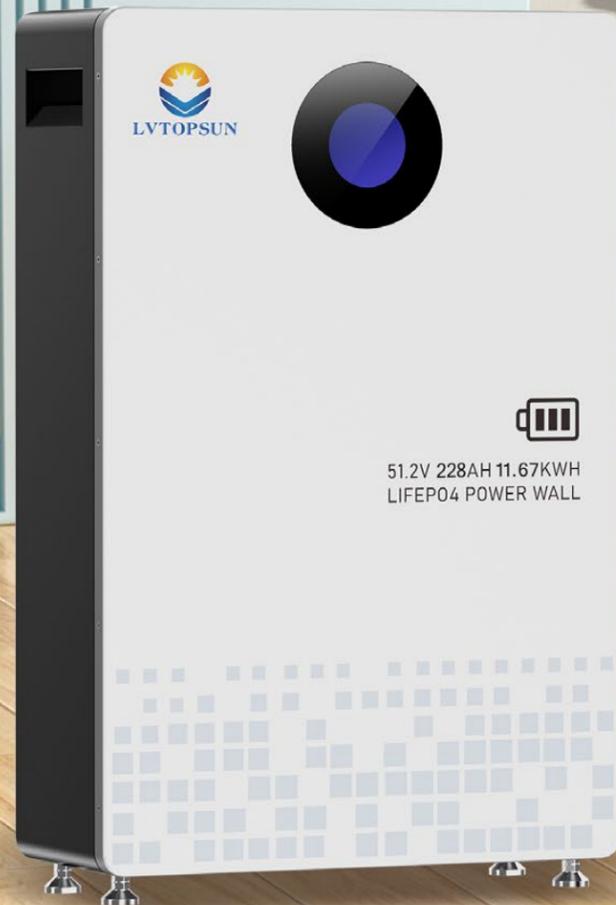


Model	LVTS-512228-G3
--------------	-----------------------

Performance	
Nominal Voltage	51.2 Vdc
Nominal Capacity	228 Ah
Battery Energy	11.67 kWh
Charge Voltage	55.68~56.16 Vdc
Discharge Voltage	45.6~56.16 Vdc
Maximum Charge Current	100 A
Maximum Discharge Current	170 A
Maximum Charge Power	5120 W
Max Discharge Power	8704 W
Short circuit current	540 A

Communication	
Display	LED indicator+ LCD Display
Communication	RS232, RS485, CAN

General Specification	
Dimension (WxDxH mm)	465x186x695 mm
Weight (Kg)	83.5 kg
Installation	Floor Stand or Wall Mount
WorkingTemperature	-20°C~60°C
Storage Temperature	≤25°C,12 months; ≤35°C,6 months; ≤45°C,3 months
Operating /Storage /humidity	≤95%RH
Max Operating Altitude	≤2000m
IP Rating	IP20
Cell Technology	LiFePO ₄ , Lithium Iron Phosphate
Cycle life	6000 Cycles @ 90% DOD/25°C/0.5C, 60% EOL
Warranty	5 years
Scalability	Max 63 batteries in parallel

Ordering and Deliverable Part	
Product ordering part	LVTS-512228 Battery (cable/wall mount included)

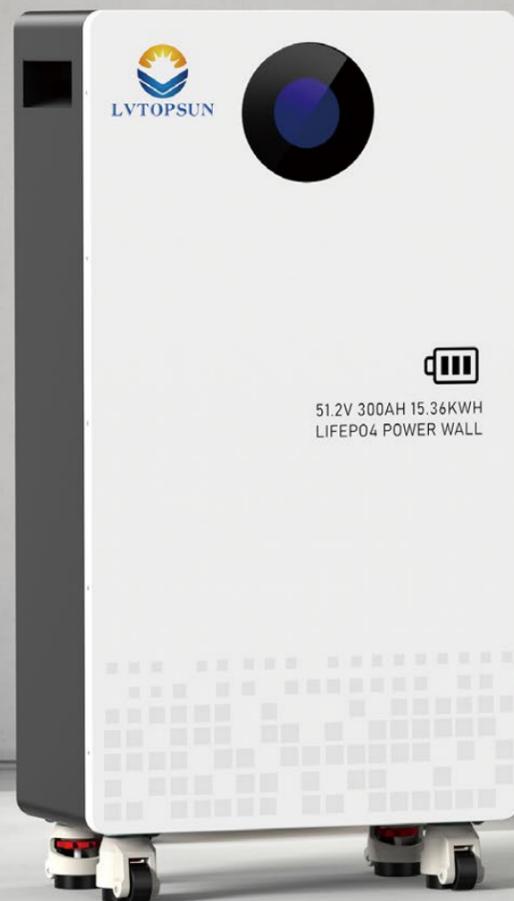

 More Usable Energy 90% Depth of Discharge	 Flexible Investment Scalable From 15.36 to 967.68 kWh	 Safe & Reliable Lithium Iron Phosphate Cell
 Easy Installation Floor Stand	 Quick Commissioning Color Touchscreen	 Perfect compatibility Compatible with DEYE, GOODWE, GROWATT, SOLIS, SOFAR, LUXPOWER, TBB ... Hybrid Inverter

Model	LVTS-512300-G3
Performance	
Nominal Voltage	51.2 Vdc
Nominal Capacity	300 Ah
Battery Energy	15.36 kWh
Charge Current	150 A
Charge Power	7680 W
Discharge Current	200 A
Discharge Power	10240 W
Short Circuit Current	540 A
Charge Voltage	55.68~56.16 Vdc
Discharge Voltage	45.6~56.16 Vdc
Communication	
Display	SOC status indicator, LED indicator, LCD Display
Communication	RS232, RS485, CAN
General Specification	
Dimension (WxDxH mm)	866x450x230 mm
Weight (Kg)	117 kg
Installation	Floor Stand
Working Temperature	-20°C~60°C
Operating/Storage Humidity	≤95%RH
Max Operating Altitude	≤2000m
IP Rating	IP20
Cell Technology	LiFePO ₄ , Lithium Iron Phosphate
Cycle life	6000 Cycles @ 90% DOD/25°C/0.5C, 60% EOL
Scalability	Max 63 batteries in parallel
Warranty	5 years
Standard Compliance (More Available Upon Request)	
Certificates	CE, UN38.3
Ordering and Deliverable Part	
Product ordering part	LVTS-512300 Battery (Cable included)



More Usable Energy
90% depth of discharge



High Energy
Single cell with 314Ah



High Expansibility
Max 63 batteries in parallel. Scalable
from 16.07kWh to 1012.83kWh



Flexible Installation
Floor stand with wheels



Perfect Compatibility
Compatible with major
inverter brand



Smart Display Screen
Touchscreen-control.
Real-time battery status display



Model	LVTS-512314-G3
--------------	-----------------------

Performance	
Nominal Voltage	51.2 Vdc
Nominal Capacity	314 Ah
Battery Energy	16076.8 Wh
Charge Voltage	56.16 V
Maximum Charge Current	150 A
Maximum Discharge Current	200 A
Charge Voltage	55.68~56.16 Vdc
Discharge Voltage	45.6~56.16 Vdc
Short Circuit Current	540 A

Communication	
Display	LED indicator + LCD Display
Communication	RS232, RS485, CAN

General Specification	
Dimension (WXDXH mm)	866x450x230 mm
Weight (Kg)	119 kg
Working Temperature	Charge 0°C~45°C Discharge -20°C~45°C
Storage Temperature	Short Term(within 1 month) -10°C~45°C
	LongTerm(within 1 year)0°C~35°C
Storage Humidity	≤ 95%RH
Max Operating Altitude	≤2000m
IP Rating	IP20
Cell Type	LiFePO ₄ , Lithium Iron Phosphate
Warranty	5 years
Cycle life	8000 Cycles @ 90% DOD/25°C/0.5C, 60% EOL

Ordering and Deliverable Part	
Product ordering part	LVTS-512314 Battery (Cable included)



SAFE

Grade A
LiFePO₄ Cell

RELIABLE

Compatible with
Major PCS Brand

SCALABLE

Scalable From 28.6
to 2016 kWh

Model	LVTS-512560	LVTS-512628
-------	-------------	-------------

Performance		
Nominal Voltage	51.2 Vdc	
Nominal Capacity	560 Ah	628 Ah
Battery Energy	28.6 kWh	32 kWh
Charge Current	150 A	
Charge Power	7.68 kW	
Discharge Current	200 A	
Discharge Power	10.24 kW	
Short circuit current	540 A	

Communication	
Display	Color Touchscreen
Communication	CAN, RS485,RS232

General Specification	
Dimension (WxDxH mm)	800x325x900 mm
Weight (kg)	240 kg
Installation	Floor Stand
Operating Temperature	Charge:0~55°C/Discharge: -20°C~55°C
Operating /Storage	≤95% RH
Max Operating Altitude	≤2000 m
IP Rating	IP20
Cell Technology	LiFePO ₄ , Lithium Iron Phosphate
Cycle life	8000 Cycles @ 90% DOD/25°C/0.5C, 60% EOL
Scalability	Max 63 batteries in parallel
Warranty	5 years

Standard Compliance (more available upon request)	
Certificates	CE, UN38.3

Ordering and Deliverable Part	
Product ordering part	LVTS-512560 Battery(Cable included)
	LVTS-512628 Battery(Cable included)



More Usable Energy
90% depth of discharge



Highly Integrated
All-In-One design



Easy Installation
Stacked design for both
battery and inverter



High Expansibility
Scalable from 5.12kWh to
20.48kWh




Smart Display Screen
Touchscreen-control.Real-time
battery status display



Perfect Compatibility
Compatible with mainstream
inverter brand



Model	LVTS-512100-1-A10	LVTS-512100-2-A10	LVTS-512100-3-A10	LVTS-512100-4-A10
Inverter Module A10-LS				
Battery Input	48 VDC,117 A			
Type Of Battery	Lithium			
Rated Power	5000 VA/5000 W			
AC Output	230 VAC,50/60 Hz,22 A,1 Φ			
AC input	230 VAC,50/60 Hz,40 A,1 Φ			
Max.AC Charge Current	80 A			
Max.PV Input Voltage(VOC)	450 VDC			
Max. PV Input Current	18 A			
MPPT Voltage Range	120~430 VDC			
warranty	2 years			
Battery Module A10-LVTS-512100				
Nominal Voltage	51.2 Vdc			
Nominal Capacity	100 Ah	200 Ah	300 Ah	400 Ah
Battery Energy	5.12 kWh	10.24 kWh	15.36 kWh	20.48 kWh
Charge Voltage	55.68~56.16 Vdc			
Discharge Voltage	45.6~56.16 Vdc			
Max Charge Current	50 A	100 A	150 A	200 A
Max Charge Power	2500 W	5000 W	7500 W	10000 W
Max Discharge Current	100 A	200 A	200 A	200 A
Max Discharge Power	5000 W	10000 W	10000 W	10000 W
Short circuit current	350 A			
Display	SOC status indicator, LED indicator			
Communication	RS232,RS485,CAN			
Dimension (WXDXH mm)	650X380X365	650X380X503.5	650X380X642	650X380X780.5
Weight (kg)	45 kg	87.5 kg	130 kg	172.5 kg
Working Temperature	-20°C~60°C			
Storage Temperature	≥25°C12 months; ≤35 °C,6 months;≤45 °C,3 months			
Cell Technology	LiFePO ₄ , Lithium Iron Phosphate			
Cycle life	6000 Cycles @ 90% DOD/25°C/0.5C, 60% EOL			
Scalability	Max 4 batteries in parallel			
warranty	5 years			

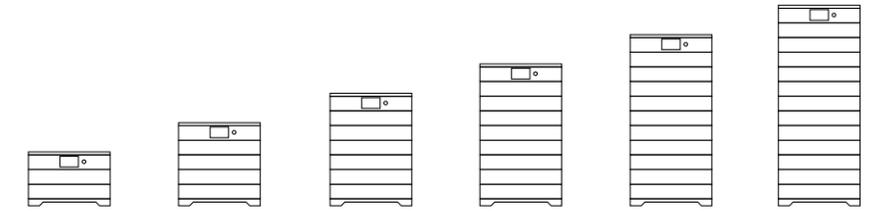

 Advanced BMS Pack level active balance	 Easy Installation 20kg control module 40kg battery module	 Flexible Voltage Options Scalable from 102.4V to 614.4V
 High Expansibility Max 16 piles in parallel	 Smart Display Screen Touchscreen-control. Real-time battery status display	 Perfect Compatibility Compatible with mainstream inverter brand

Model	LVTS-5220-HV2	LVTS-5220-HV4	LVTS-5220-HV6	LVTS-5220-HV8	LVTS-5220-HV10	LVTS-5220-HV12
Performance						
Nominal Voltage(Vdc)	102.4	204.8	307.2	409.6	512	614.4
Operating Voltage(Vdc)	83.2-113.6	166.4-227.2	249.6-340.8	332.8-454.4	416-568	499.2-681.6
Nominal Capacity(Ah)	102					
Battery Energy(kWh)	10.44	20.88	31.32	41.76	52.20	62.64
Charge Current(A)	50					
Charge Power(W)	5120	10240	15360	20480	25600	30720
Discharge Current(A)	80					
Discharge Power(W)	8192	16384	24576	32768	40960	49152
Communication						
Display	4.3 inch (16:9) Touch Screen					
Communication	CAN					
General Specification						
Dimension (WxDxH mm)	620x380x506	620x380x783	620x380x1060	620x380x1337	620x380x1614	620x380x1891
Weight (Kg)	110 kg	200 kg	290 kg	380 kg	470 kg	560 kg
Installation	Floor Stand					
Working Temperature	-20°C~60°C					
Storage humidity	≤95% RH					
Warranty	5 years					
Max Operating Altitude	≤2000m					
IP Rating	IP65					
Cell Technology	LiFePO ₄ , Lithium Iron Phosphate					
Cycle life	6000 Cycles @ 80% DOD/25°C/0.5C, 60% EOL					
Scalability	Max 16 piles in parallel					
Standard Compliance (More Available Upon Request)						
Certificates	CE, UN38.3					
Ordering and Deliverable Part						
Product ordering part	LVTS-5220-HV Battery LVTS-5220-HVMain Control Level 3 Parallel Box					



High Expansibility

Scalable from 2.56kWh to 20.48kwh



Safe&Reliable

Lithium iron phosphate cell
Cobalt free



Easy Maintenance

Easy emergency recharge

Model	LVTS-256100
--------------	--------------------

Performance	
Nominal Voltage	25.6 Vdc
Nominal Capacity	100 Ah
Battery Energy	25.6V,100Ah,2.56 kWh
Charge Current	50 A
Charge Power	1280 W
Discharge Current	100 A
Discharge Power	2560 W
Short Circuit Current	≈2000 A

General Specification	
Dimension (WxDxH mm)	330x135x420 mm
Weight (Kg)	26 kg
Installation	Wall Mount
Display	LCD Display
Working Temperature	-20°C~60°C
Operating/Storage	≤ 95%RH
Max Operating Altitude	≤2000m
IP Rating	IP20
Cell Technology	LiFePO ₄ , Lithium Iron Phosphate
Cycle life	6000 Cycles @ 80% DOD/25°C/0.5C, 60% EOL
Scalability	Max 2 batteries in series Max 4 batteries in parallel
Warranty	5 years

Standard Compliance (More Available Upon Request)	
Certificates	CE, UN38.3

Ordering and Deliverable Part	
Product ordering part	LVTS-256100 Battery



High Expansibility

Scalable from 5.12kWh to 20.48kwh



Safe&Reliable

Lithium iron phosphate cell
Cobalt free



Easy Maintenance

Easy emergency recharge

Model	LVTS-256200	LVTS-256280
Performance		
Nominal Voltage	25.6 Vdc	
Nominal Capacity	200 Ah	280 Ah
Battery Energy	5120 Wh	7168 Wh
Charge Current	100 A	140 A
Discharge Current	160 A	200 A
Charge Voltage	28.4 V	
Discharge Voltage Range	22.8 V~28.4 V	
Communication		
Display	Button Screen	
Communication	CAN,RS485,RS232	
General Specification		
Dimension (WxDxH mm)	580x430x230 mm	
Weight (Kg)	50 kg	62.5 kg
Installation	Wall Mount	
Display	LCD Display	
Working Temperature	-20°C~60°C	
Operating/Storage	≤ 95%RH	
Max Operating Altitude	≤2000m	
IP Rating	IP20	
Cell Technology	LiFePO ₄ , Lithium Iron Phosphate	
Cycle life	6000 Cycles @ 80% DOD/25°C/0.5C,60% EOL	
Scalability	Max 63 batteries in parallel	
Warranty	5 years	
Standard Compliance (More Available Upon Request)		
Certificates	CE, UN38.3	
Ordering and Deliverable Part		
Product ordering part	LVTS-256200 Battery / LVTS-256280 Battery	





Economic & Affordable



High Expansibility



Safe & Reliable
Lithium iron phosphate cell
Cobalt free

Model	LVTS-128100-E	LVTS-128200-E	LVTS-128280-E
-------	---------------	---------------	---------------

Performance			
Nominal Ratings	12.8 V, 100 Ah, 1.28kWh	12.8 V, 200 Ah, 2.56kWh	12.8 V, 280 Ah, 3.58kWh
Bulk Charge Voltage	14 V		
Float Charge Voltage	13.8 V		
Low Voltage	12.8 V		
Cutoff Voltage	11.6 V		
Charge Current	50 A	100 A	150 A
Discharge Current	100 A	200 A	200 A
Short Circuit Current	≈1000 A	≈2000 A	≈2000 A

General Specification			
Dimension (WxDxH mm)	260X168X210 MM	520X168X210 MM	387X206X269 MM
Weight (Kg)	9.85 kg	26 kg	27 kg
Working Temperature	-20°C~60°C		
Operating/Storage	≤ 95%RH		
Max Operating Altitude	≤2000m		
IP Rating	IP54		
Cell Technology	LiFePO ₄ , Lithium Iron Phosphate		
Cycle life	6000 Cycles @ 80% DOD/25°C/0.5C, 60% EOL		
Warranty	5 years		
Scalability	Max 4pcs in series		Max 4pcs in parallel

Standard Compliance (more available upon request)	
Certificates	CE, UN38.3

Ordering and Deliverable Part	
Product ordering part	LVTS-128100 Battery / LVTS-128200 Battery / LVTS-128280 Battery



Economic & Affordable



High Expansibility



Safe & Reliable
Lithium iron phosphate cell
Cobalt free

Model	LVTS-256100-E	LVTS-256200-E
-------	---------------	---------------

Performance		
Nominal Ratings	25.6 V, 100 Ah, 2.56 kWh	25.6 V, 200 Ah, 5.12 kWh
Bulk Charge Voltage	28 V	
Float Charge Voltage	27.6 V	
Low Voltage	25.6 V	
Cutoff Voltage	23.2 V	
Charge Current	500 A	100 A
Discharge Current	100 A	200 A
Short Circuit Current	≈ 1000 A	≈ 2000 A

General Specification		
Dimension (WxDxH mm)	491X182X232 mm	580X430X230 mm
Weight (Kg)	19 kg	51 kg
Working Temperature	-20°C~60°C	
Operating/Storage	≤ 95%RH	
Max Operating Altitude	≤ 2000m	
IP Rating	IP54	
Cell Technology	LiFePO ₄ , Lithium Iron Phosphate	
Cycle life	6000 Cycles @ 80% DOD/25°C/0.5C, 60% EOL	
Warranty	5 years	
Scalability	Max 2pcs in series	Max 4pcs in parallel

Standard Compliance (more available upon request)	
Certificates	CE, UN38.3

Ordering and Deliverable Part	
Product ordering part	LVTS-256100 Battery / LVTS-256200 Battery



More Usable Energy
90% depth of discharge



High Energy
Single cell with 314Ah



High Expansibility
Max 63 batteries in parallel. Scalable
from 16.07kWh to 1012.83kWh



Flexible Installation
Floor stand with wheels



Safe&Reliable
Lithium iron phosphate cell!
Cobalt free



Perfect Compatibility
Compatible with major
inverter brand



Model	LVTS-512314-G4
--------------	-----------------------

Performance	
Nominal Voltage	51.2 Vdc
Nominal Capacity	314 Ah
Battery Energy	16.07 kWh
Charge Current	150 A
Charge Power	7680 W
Discharge Current	200 A
Discharge Power	10240 W
Short Circuit Current	540 A

Communication	
Display	SOC status indicator, LED indicator, LCD Display
Communication	RS232, RS485, CAN
Product Features	Automatic sensing fire extinguishing device/Bluetooth/WiFi

General Specification	
Dimension (WxDxH mm)	480x235x874 mm
Weight (Kg)	120 kg
Installation	Floor stand
Working Temperature	-20°C~60°C
Operating/Storage Humidity	≤95%RH
Max Operating Altitude	≤2000m
IP Rating	IP65
Cell Technology	LiFePO ₄ , Lithium Iron Phosphate
Cycle life	8000 Cycles @ 90% DOD/25°C/0.5C, 60% EOL
Scalability	Max 63 batteries in parallel
Warranty	10 years

Ordering and Deliverable Part	
Product ordering part	LVTS-512314 Battery (Cable included)



Model	LVTS-512314-HV
--------------	-----------------------

Performance	
Nominal Voltage	307.2 V
Nominal Capacity	LFP 314 Ah
Battery Energy	100 kWh
Charge Voltage	345.6 V
Maximum Charge Current	150 A
Maximum Discharge Current	200 A
Charge Voltage	345.6 V
Discharge Voltage	268.8 V

Communication	
Display	LCD Display
Communication	RS232, RS485, CAN

General Specification	
Dimension (WXDXH mm)	875x650x1800 mm
Weight (Kg)	950 kg
Working Temperature	Charge 0°C~45°C Discharge -20°C~45°C
Storage Temperature	Short Term(within 1 month) -10°C~45°C
	LongTerm(within 1 year)0°C~35°C
Storage Humidity	≤ 95%RH
Max Operating Altitude	≤2000m
IP Rating	IP20
Cell Type	LiFePO ₄ , Lithium Iron Phosphate
Warranty	5 Years/10 years
Cycle life	8000 Cycles @ 90% DOD/25°C/0.5C, 60% EOL

Ordering and Deliverable Part	
Product ordering part	LVTS-512314-HV Battery (Cable included)