

Drop-in Circulators

Part Number: KTDC-102K12

Key Features

- Frequency Range: 1080-1140MHz
- Low Insertion Loss, High Isolation
- Small Size, High Power Handling
- Wide Operating Temperature Range : -40℃~+85℃
- Commercial, Military and Space Applications


Electrical Specifications at Room (25℃±5℃) Temperature

Part Number	Freq. Range (MHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Forward Power (W)	Connector Type
KTDC-102K12	1080 - 1140	full	0.3	23	1.20	50	TAB

Electrical Specifications at -40℃~+85℃ Temperature

Part Number	Freq. Range (MHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Forward Power (W)	Connector Type
KTDC-102K12	1080 - 1140	full	0.4	20	1.25	50	TAB

Mechanical Dimensions (mm)

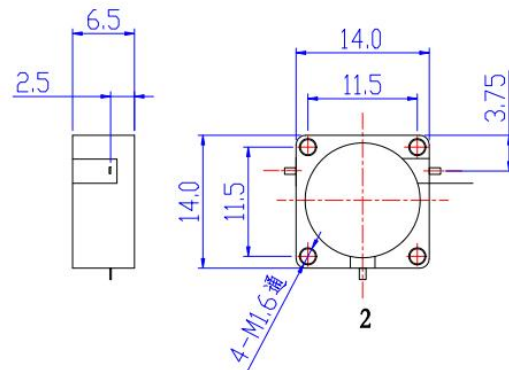

HOW TO ORDER

