

Drop-in Circulators

Part Number: KTDC-402A


Key Features

- Frequency Range: 3.5GHz-8.0GHz
- Low Insertion Loss
- High Isolation, Small Size
- Wide Operating Temperature Range: -40℃~+70℃
- Commercial, Military and Space Applications

Electrical Specifications at Room (25℃±5℃) Temperature

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Forward Power (W)	Connector Type
KTDC-402A	3.5 - 8.0	300	0.3	23	1.20	50	TAB
KTDC-402A	3.5 - 8.0	600	0.4	23	1.20	50	TAB

Mechanical Dimensions (mm)

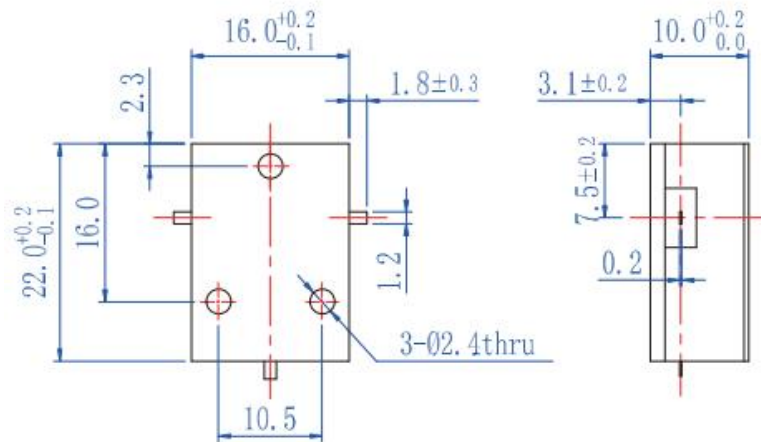

HOW TO ORDER

