

Drop-in Circulators

Part Number: KTDC102M3-100


Key Features

- Frequency Range: 1.2GHz-3.8GHz
- Low Insertion Loss, High Isolation,
- Small Size, High Power, Good Performance
- Wide Operating Temperature Range : -40℃~+85℃
- Commercial, Military and Space Applications'

Electrical Specifications at Room (25℃±5℃) Temperature

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Forward Power (W)	Connector Type
KTDC102M3-100	1.2 - 3.8	100	0.4	23	1.20	100	TAB
KTDC102M3-100	1.2 - 3.8	200	0.5	20	1.25	100	TAB

Mechanical Dimensions (mm)

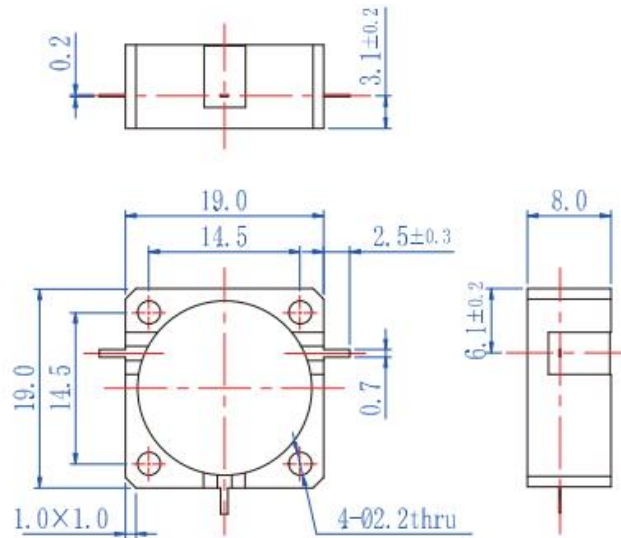

HOW TO ORDER

