

Microstrip Circulator

Part Number: KTMC-1502A29

Key Features

- Frequency Range: 17GHz-18GHz
- Good Consistency
- Small Size, High Precision
- High Isolation, Low Insertion Loss
- Wide Operating Temperature Range: -40℃~+85℃
- Widely Used in Various Millimeter Wave Radar & TR Components


Electrical Specifications at Room (25℃±5℃) Temperature

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Forward Power (W)	Connector Type
KTMC-1502A29	17 - 18	full	0.6	18	1.30	10	GWB

Electrical Specifications at -40℃~+85℃ Temperature

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Forward Power (W)	Connector Type
KTMC-1502A29	17 - 18	full	0.65	17	1.35	10	GWB

Mechanical Dimensions (mm)

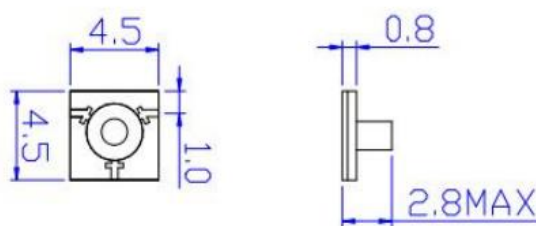

HOW TO ORDER

