

Microstrip Dual Junction Circulator

Part Number: KTMC-1502AS14


Key Features

- Frequency Range: 14.5GHz-16.0GHz
- Good Consistency
- Small Size, High Precision
- High Isolation, Low Insertion Loss
- Wide Operating Temperature Range: -55℃~+85℃
- Widely Used in Various Millimeter Wave Radar & TR Components

Electrical Specifications at Room (25℃±5℃) Temperature

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Forward Power (W)	Connector Type
KTMC-1502AS14	14.5 - 16.0	full	0.6(1→2) 1.2(2→3)	17(2→1) 30(3→2)	1.30	20	GWB

Mechanical Dimensions (mm)

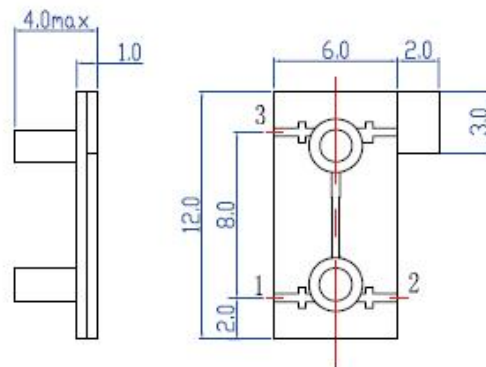

HOW TO ORDER

