

Microstrip Circulator

Part Number: KTMC-502A2


Key Features

- Broad Frequency Range: 5GHz-6GHz
- Good Consistency
- Small Volume, High Precision
- High Isolation, Low Insertion Loss
- Wide Operating Temperature Range: -55℃~+85℃
- Widely Used in Various Millimeter Wave Radar & TR Components

Electrical Specifications at Room (25℃±5℃) Temperature

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Forward Power (W)	Connector Type
KTMC-502A2	5 - 6	full	0.6	17	1.35	20	GWB

Mechanical Dimensions (mm)

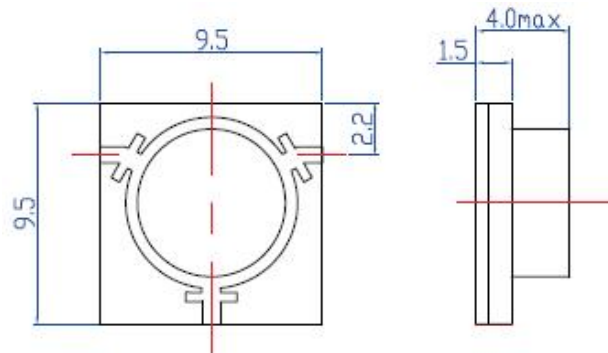

HOW TO ORDER

