

Microstrip Circulator

Part Number: KTMC-502A3


Key Features

- Frequency Range: 5.2GHz-5.9GHz
- Good Consistency
- Small Size, High Precision
- High Isolation, Low Insertion Loss
- Wide Operating Temperature Range: -55℃~+85℃
- Widely Used in Various Millimeter Wave Radar & TR Components

Electrical Specifications at Room (25℃±5℃) Temperature

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Forward Power (W)	Connector Type
KTMC-502A3	5.2 - 5.9	full	0.5	18	1.30	20	GWB

Mechanical Dimensions (mm)

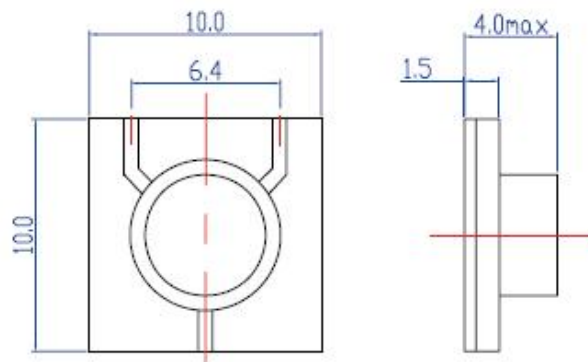

HOW TO ORDER

