

Microstrip Dual Junction Circulator

Part Number: KTMC-502AS7


Key Features

- Frequency Range: 5.2GHz-5.7GHz
- Good Consistency
- Small Size, High Precision
- High Isolation, Low Insertion Loss
- Wide Operating Temperature Range: -55°C~+85°C
- Widely Used in Various Millimeter Wave Radar & TR Components

Electrical Specifications at Room (25°C±5°C) Temperature

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Forward Power (W)	Connector Type
KTMC-502A7	5.2 - 5.7	full	0.4(1→2) 0.7(2→3)	20(2→1) 39(3→2)	1.25	25	GWB

Mechanical Dimensions (mm)

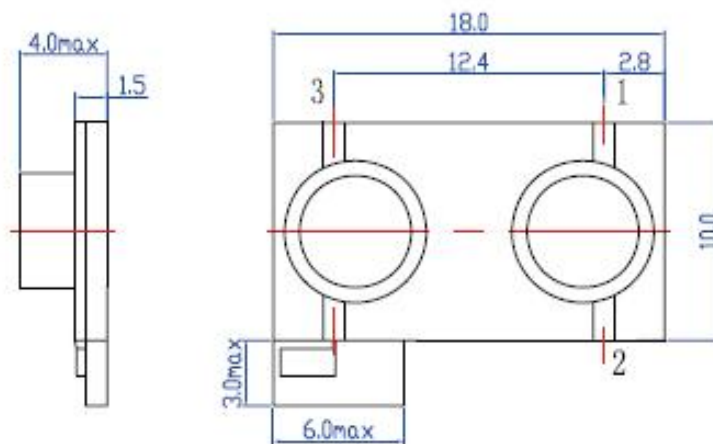

HOW TO ORDER

