

Microstrip Circulator

Part Number: KTMC-902A2


Key Features

- Broad Frequency Range: 8.6GHz-10.6GHz
- Good Consistency
- Small Size, High Precision
- High Isolation, Low Insertion Loss
- Wide Operating Temperature Range: -55℃~+85℃
- Widely Used in Various Millimeter Wave Radar & TR Components

Electrical Specifications at Room (25℃±5℃) Temperature

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Forward Power (W)	Connector Type
KTMC-902A2	8.6 - 10.6	full	0.6	17	1.35	30	GWB

Mechanical Dimensions (mm)

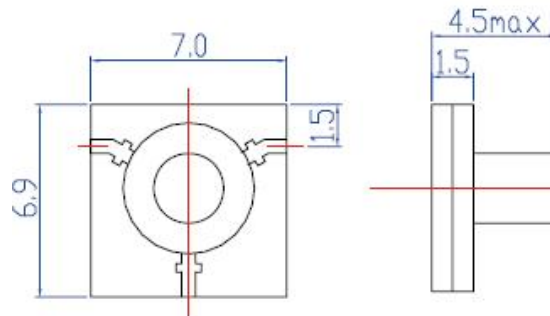

HOW TO ORDER

