

Microstrip Dual Junction Circulator

Part Number: KTMC1502S4-1


Key Features

- Frequency Range: 15.5GHz-17.9GHz
- Good Consistency
- Small Size, High Precision
- High Isolation, Low Insertion Loss
- Wide Operating Temperature Range : -55℃~+85℃
- Widely Used in Various Millimeter Wave Radar & TR Components

Electrical Specifications at Room (25℃±5℃) Temperature

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Forward Power (W)	Connector Type
KTMC1502S4-1	15.5 - 17.9	full	0.65(2→1) 1.1(1→3)	18(1→2) 30(3→1)	1.30	10	GWB

Mechanical Dimensions (mm)

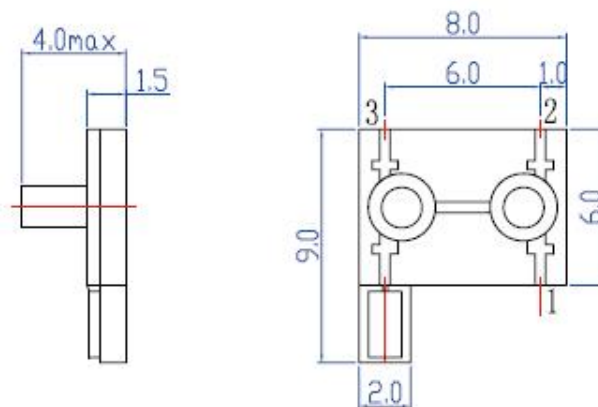

HOW TO ORDER

