

Drop-in Isolators

Part Number: KTDI-702M4


Key Features

- Frequency Range: 4.5GHz-16.5.0GHz
- Low Insertion Loss, High Isolation
- Small Size, High Reliability Performance
- Wide Operating Temperature Range: -40℃~+85℃
- Commercial, Military and Space Applications

Electrical Specifications at Room (25℃±5℃) Temperature

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Reverse Power (W)	Connector Type
KTDI-702M4	4.5 - 16.5	525	0.4	20	1.25	10	TAB
KTDI-702M4	8 - 12	2000	0.5	20	1.30	10	TAB
KTDI-702M4	8 - 12	4000	0.6	18	1.35	10	TAB
KTDI-702M4	12 - 17	1000	0.5	20	1.30	10	TAB

Mechanical Dimensions (mm)

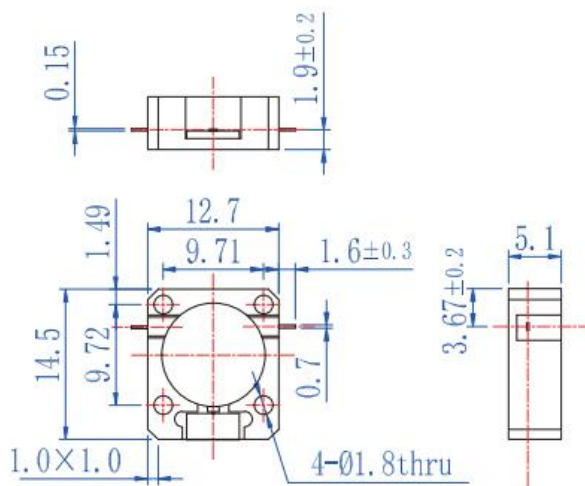

HOW TO ORDER

