

Microstrip Isolators

Part Number: KTMI-1502A22


Key Features

- Frequency Range: 14.8GHz-17.2GHz
- Good Consistency
- Small Size, High Precision
- High Isolation, Low Insertion Loss
- Wide Operating Temperature Range: -55℃~+85℃
- Widely Used in Various Millimeter Wave Radar & TR Components

Electrical Specifications at Room (25℃±5℃) Temperature

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Reverse Power (W)	Connector Type
KTMI-1502A22	14.8 - 17.2	full	0.6	18	1.35	10	GWB

Mechanical Dimensions (mm)

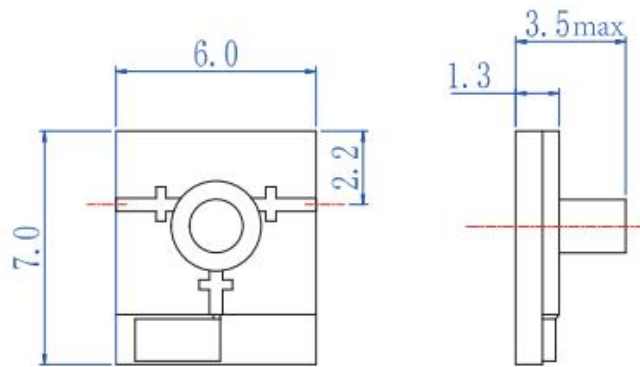

HOW TO ORDER

