

Microstrip Isolators

Part Number: KTMI-2002A


Key Features

- Frequency Range: 17.5GHz-22.0GHz
- Good Consistency
- Small Size, High Precision
- High Isolation, Low Insertion Loss
- Wide Operating Temperature Range: -55℃~+85℃
- Widely Used in Various Millimeter Wave Radar & TR Components

Electrical Specifications at Room (25℃±5℃) Temperature:

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Reverse Power (W)	Connector Type
KTMI-2002A	17.5 - 22.0	full	0.7	18	1.30	0.5	GWB

Mechanical Dimensions (mm)

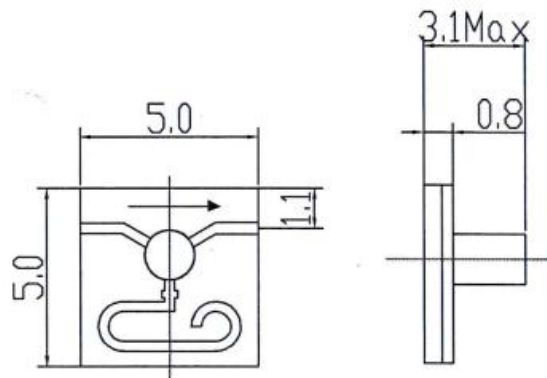

HOW TO ORDER

