

Microstrip Isolators

Part Number: KTMI-702A1


Key Features

- Frequency Range: 7.0GHz-7.5GHz
- Good Consistency
- Small Size, High Precision
- High Isolation, Low Insertion Loss
- Wide Operating Temperature Range: -55℃~+85℃
- Widely Used in Various Millimeter Wave Radar & TR Components

Electrical Specifications at Room (25℃±5℃) Temperature

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Reverse Power (W)	Connector Type
KTMI-702A1	7.0 - 7.5	full	0.5	20	1.25	0.5	GWB

Mechanical Dimensions (mm)

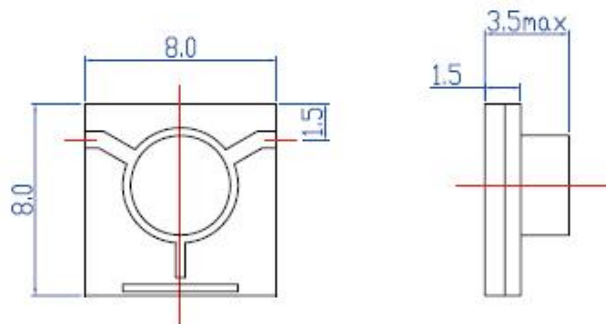

HOW TO ORDER

