

Surface Mount Isolators

Part Number: KTSI-302S06


Key Features

- Vibration Resistance, Shock Resistance
- Compact Structure, Small Size
- High Frequency Characteristic
- High Production Efficiency
- Operating Temperature Range : -40℃~+85℃
- Widely Used in All Kinds of Base Stations, Small Power Amplifier etc.

Electrical Specifications at Room (25℃±5℃) Temperature

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Reverse Power (W)	Connector Type
KTSI-302S06	2.2 - 5.0	400	0.4	20	1.25	10	SMD

Mechanical Dimensions (mm)

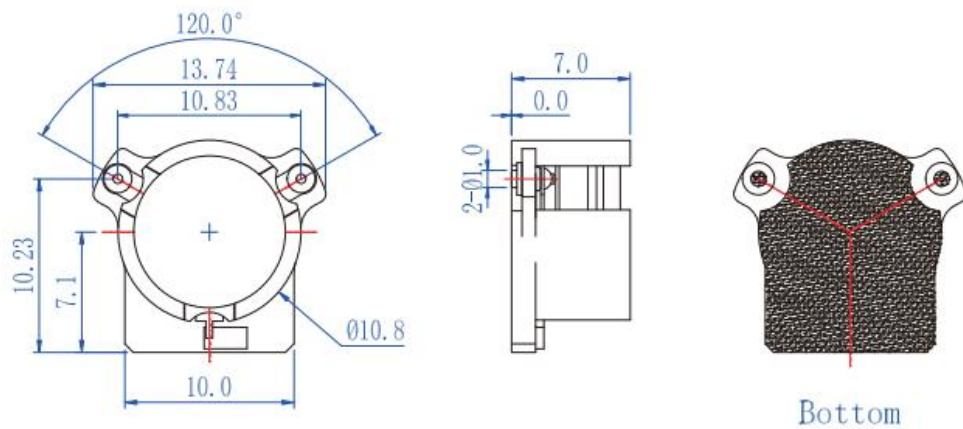

HOW TO ORDER

