


SMA, DC-18GHz, 10W

Electrical Specifications

- ✧ **Nominal Impedance:** 50 Ω
- ✧ **Average Power:** 10W
- ✧ **Peak Power:** 0.5KW (5 μ s Pulse Width, 2% Duty Cycle)
- ✧ **Connector Type:** SMA (Male/Female)
- ✧ **Operating Temperature:** -55 $^{\circ}$ C to +125 $^{\circ}$ C
- ✧ **Dimension:** Φ 17x50mm
- ✧ **Net Weight:** 19.5g
- ✧ **RoHS Compliant**

Outline Drawing (mm)

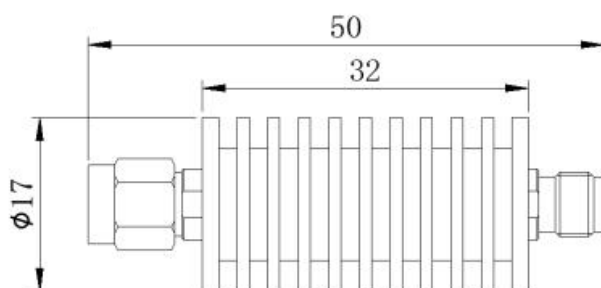

art Number	Frequency Range(GHz)	Attenuation Value & Accuracy (dB)						VSWR (Max.)
		3	6	10	20	30	40	
CA10-XX-S-6-A	DC-6	± 0.5	± 0.5	± 0.6	± 0.6	± 0.8	± 0.8	1.20
CA10-XX-S-12.4-A	DC-12.4	± 0.6	± 0.6	± 0.8	± 0.8	± 0.8	± 0.8	1.25
CA10-XX-S-18-A	DC-18	± 0.8	± 0.8	± 0.8	± 0.8	± 1.0	± 1.0	1.30

* xx refer to attenuator value in dB.

Notes:

1. The coaxial fixed attenuator must pay attention to the power input direction.
2. Input power shall meet the requirements of the power derating.