


## N, DC-18GHz, 150W

### Electrical Specifications

- ◇ **Nominal Impedance:** 50 Ω
- ◇ **Average Power:** 150W
- ◇ **Peak Power:** 1KW (5μs Pulse, 10% Duty Cycle)
- ◇ **Connector Type:** N (Male/Female)
- ◇ **Operating Temperature:** -55℃ to +125℃
- ◇ **Dimension:** Φ64x310mm
- ◇ **Net Weight:** 950g
- ◇ **RoHS Compliant**
- ◇ **Optional/Customized Brackets**

### Outline Drawing (mm)

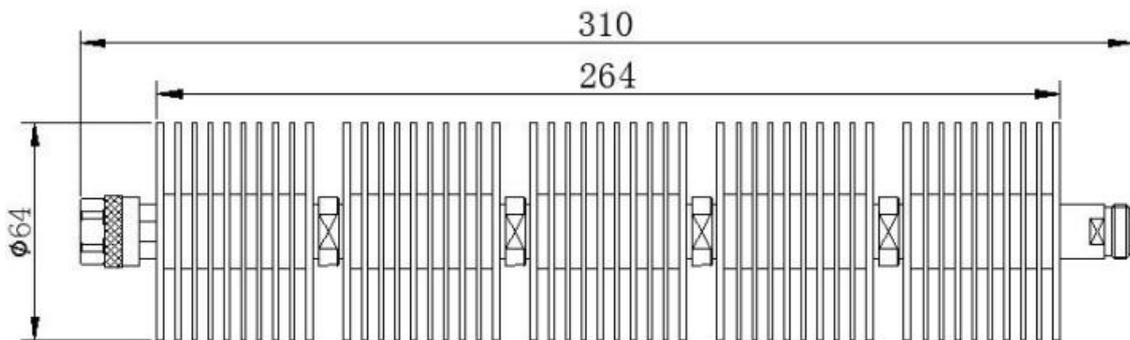

Part Number	Frequency Range (GHz)	Attenuation Value & Accuracy (dB)							VSWR (Max.)
		3	6	10	20	30	40	50	
CA150-XX-N-12.4-A	DC-12.4	±1.5	-1.0/+2.5	±2.0	±2.0	±2.0	±2.0	±2.0	1.35
CA150-XX-N-18-A	DC-18	-1.0/+2.5	-1.0/+2.5	±2.0	±2.0	±2.0	±2.0	±2.0	1.40

\* xx refer to attenuator value in dB.

### Notes:

1. The coaxial fixed attenuator must pay attention to the power input direction.
2. Input power shall meet the requirements of the power derating.