


## N, DC-18GHz, 200W

### Electrical Specifications

- ◇ **Nominal Impedance:** 50 Ω
- ◇ **Average Power:** 200W
- ◇ **Peak Power:** 1KW (5μs Pulse, 10% Duty Cycle)
- ◇ **Connector Type:** N (Male/Female)
- ◇ **Operating Temperature:** -55℃ to +125℃
- ◇ **Dimension:** Φ64x363mm
- ◇ **Net Weight:** 1.1kg
- ◇ **RoHS Compliant**

### Outline Drawing (mm)

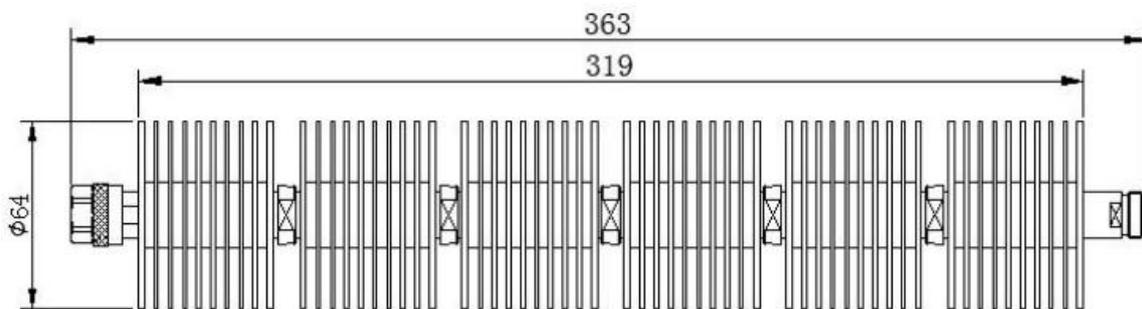

Part Number	Frequency Range (GHz)	Attenuation Value & Accuracy (dB)					VSWR (Max.)
		10	20	30	40	50	
CA200-XX-N-12.4-C	DC-12.4	-2.5/+1.5	-2.5/+1.5	-1.5/+2.0	-1.0/+2.5	-1.5/+3.0	1.40
CA200-XX-N-18-C	DC-18	-2.5/+4.0	-2.5/+5.0	-2.0/+3.5	-2.0/+3.5	-2.0/+3.5	1.50

\* xx refer to attenuator value in dB.

### Notes:

1. The coaxial fixed attenuator must pay attention to the power input direction.
2. Input power shall meet the requirements of the power derating.