


N, DC-18GHz, 200W

Electrical Specifications

- ✧ **Nominal Impedance:** 50 Ω
- ✧ **Average Power:** 200W
- ✧ **Peak Power:** 1KW (5 μ s Pulse, 10% Duty Cycle)
- ✧ **Connector Type:** N (Male/Female)
- ✧ **Operating Temperature:** -55 $^{\circ}$ C to +125 $^{\circ}$ C
- ✧ **Dimension:** Φ 64x363mm
- ✧ **Net Weight:** 1.1kg
- ✧ **RoHS Compliant**

Outline Drawing (mm)

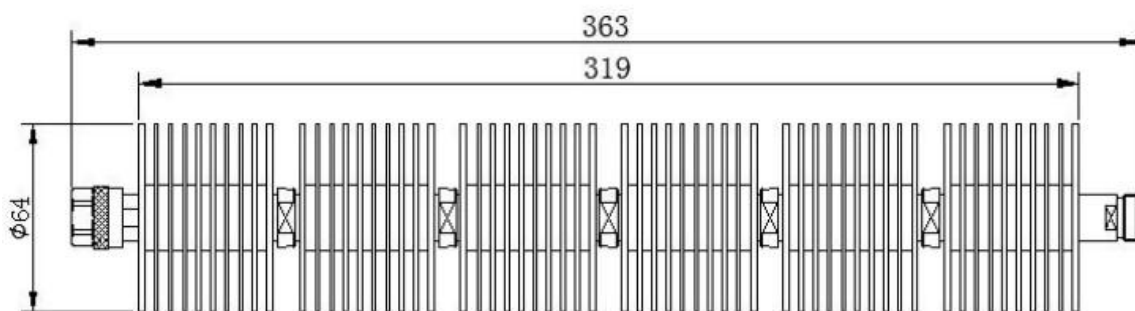

Part Number	Frequency Range (GHz)	Attenuation Value & Accuracy (dB)					VSWR (Max.)
		10	20	30	40	50	
CA200-XX-N-12.4-C	DC-12.4	-2.5/+1.5	-2.5/+1.5	-1.5/+2.0	-1.0/+2.5	-1.5/+3.0	1.40
CA200-XX-N-18-C	DC-18	-2.5/+4.0	-2.5/+5.0	-2.0/+3.5	-2.0/+3.5	-2.0/+3.5	1.50

* xx refer to attenuator value in dB.

Notes:

1. The coaxial fixed attenuator must pay attention to the power input direction.
2. Input power shall meet the requirements of the power derating.