


N, DC-6GHz, 200W

Electrical Specifications

- ◇ **Nominal Impedance:** 50 Ω
- ◇ **Average Power:** 200W
- ◇ **Peak Power:** 10KW (5μs Pulse, 2% Duty Cycle) for 200x142x65mm
1KW (5μs Pulse, 2% Duty Cycle) for different outline 200x142x65mm
- ◇ **Connector Type:** N (Male/Female)
- ◇ **Operating Temperature:** -55°C to +125°C
- ◇ **Dimension:** 200x142x65mm, 200x142x65mm
- ◇ **Net Weight:** 2.4kg, 2.4kg
- ◇ **RoHS Compliant**

Outline Drawing (mm)

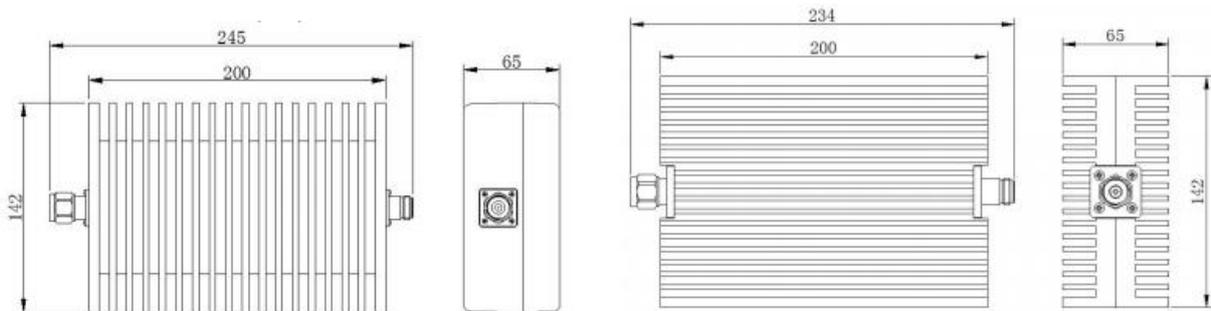

Part Number	Frequency Range (GHz)	Attenuation Value & Accuracy (dB)							VSWR (Max.)	Sizes (mm)
		3	6	10	20	30	40	50		
CA200-XX-N-3-A	DC-3	±0.4	±0.4	±0.6	±0.8	±0.8	±1.0	±1.2	1.20	200x142x65
CA200-XX-N-6-A	DC-6	±0.8	±0.8	±1.0	±1.0	±1.2	±1.5	±1.5	1.35	
CA200-XX-N-10-B	DC-10	±0.8	±0.8	±1.0	±1.2	±1.5	±2.0	/	1.40	200x142x65

* xx refer to attenuator value in dB.

Notes:

1. The coaxial fixed attenuator must pay attention to the power input direction.
2. Input power shall meet the requirements of the power derating.