


N, DC-18GHz, 5W

Electrical Specifications

- ◇ **Nominal Impedance:** 50 Ω
- ◇ **Average Power:** 5W
- ◇ **Peak Power:** 0.5KW (5μs Pulse, 1% Duty Cycle)
- ◇ **Connector Type:** N (Male/Female)
- ◇ **Operating Temperature:** -55℃ to +125℃
- ◇ **Dimension:** Φ21x58mm , Φ21x52mm
- ◇ **Net Weight:** 64g, 50g
- ◇ **RoHS Compliant**

Outline Drawing (mm)

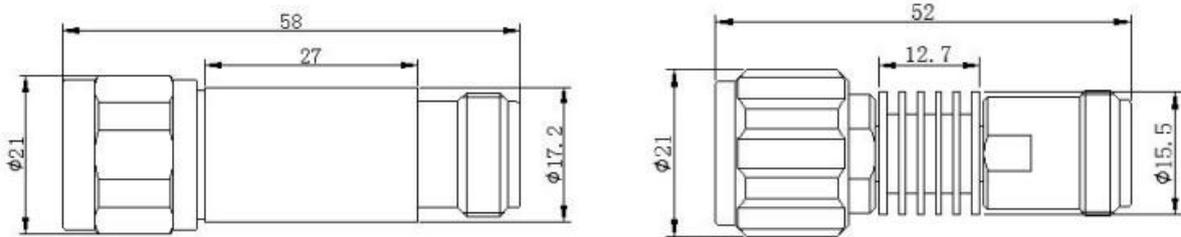

Part Number	Frequency Range(GHz)	Attenuation Value & Accuracy (dB)					VSWR (Max.)	Sizes (mm)
		1-9	10	20	30	40		
CA5-XX-N-3-A	DC-3	±0.4	±0.5	±0.6	±0.6	±0.8	1.20	Φ21x58mm
CA5-XX-N-6-A	DC-6	±0.5	±0.6	±0.8	±0.8	±1.0	1.30	
CA5-XX-N-12.4-B	DC-12.4	±0.6	±0.6	±0.8	±0.8	±1.0	1.30	Φ21x52mm
CA5-XX-N-18-B	DC-18	±0.8	±0.8	±1.0	±1.0	±1.2	1.35	

* xx refer to attenuator value in dB.

Notes:

1. The coaxial fixed attenuator must pay attention to the power input direction.
2. Input power shall meet the requirements of the power derating.