


3.5mm, DC-26.5GHz, 100W

Electrical Specifications

- ◇ **Nominal Impedance:** 50 Ω
- ◇ **Average Power:** 100W
- ◇ **Peak Power:** 1KW (5μs Pulse, 10% Duty Cycle)
- ◇ **Connector Type:** 3.5mm (Male/Female)
- ◇ **Operating Temperature:** -55℃ to +125℃
- ◇ **Dimension:** Φ63x117mm
- ◇ **Net Weight:** 386g
- ◇ **RoHS Compliant**

Outline Drawing (mm)

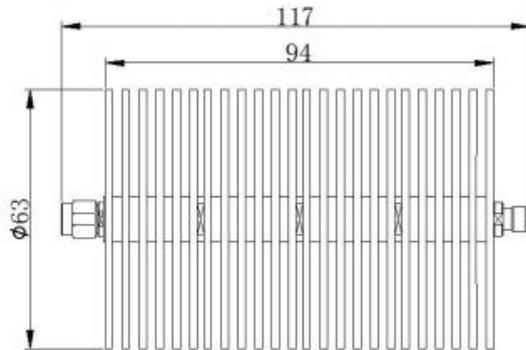

Part Number	Frequency Range(GHz)	Attenuation Value & Accuracy (dB)						VSWR (Max.)	
		3	6	10	20	30	40		50
CA100-XX-3.5-26.5	DC-26.5	-1.5/+3.0			-1.0/+2.5		-1.0/+3.0		1.40

* xx refer to attenuator value in dB.

Notes:

1. The coaxial fixed attenuator must pay attention to the power input direction.
2. Input power shall meet the requirements of the power derating.