


N, DC-4GHz, 1000W

Electrical Specifications

- ◇ **Nominal Impedance:** 50 Ω
- ◇ **Average Power:** 1000W
- ◇ **Peak Power:** 10KW (5μs Pulse, 10% Duty Cycle)
- ◇ **Connector Type:** N (Male/Female)
- ◇ **Operating Temperature:** -55℃ to +125℃
- ◇ **Dimension:** 400x410x147mm
- ◇ **Heat Dissipation Mode:** Fan Cooling
- ◇ **Power Supply Mode:** AC-220V±10%, 50Hz
- ◇ **Net Weight:** 10kg
- ◇ **RoHS Compliant**

Outline Drawing (mm)

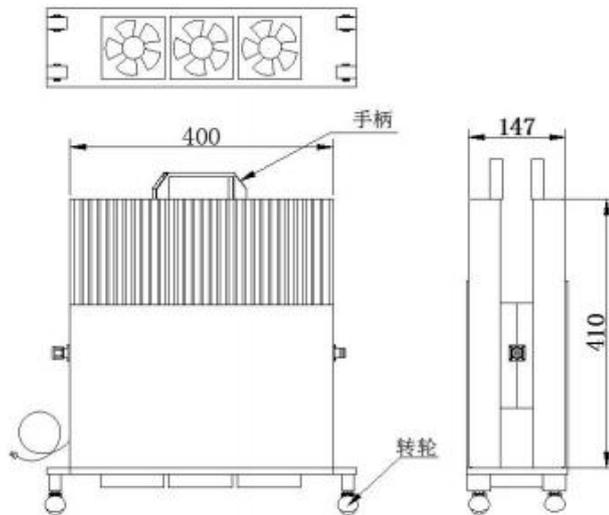

Part Number	Frequency Range (GHz)	Attenuation Value & Accuracy (dB)					VSWR (Max.)
		10	20	30	40	50	
CA1000-XX-N-3-A	DC-3	±1.5	±1.5	±2.0	±2.0	±2.0	1.35
CA1000-XX-N-4-A	DC-4	±2.0	±2.0	±2.0	±2.0	±2.5	1.45

* xx refer to attenuator value in dB.

Notes:

1. The coaxial fixed attenuator must pay attention to the power input direction.
2. Input power shall meet the requirements of the power derating.