


3.5mm, DC-26.5GHz, 2W

Electrical Specifications

- ◇ **Nominal Impedance:** 50 Ω
- ◇ **Average Power:** 2W
- ◇ **Peak Power:** 0.1KW (5μs Pulse, 2% Duty Cycle)
- ◇ **Connector Type:** 3.5mm (Male/Female)
- ◇ **Operating Temperature:** -55℃ to +125℃
- ◇ **Dimension:** Φ10x33mm
- ◇ **Net Weight:** 9g
- ◇ **RoHS Compliant**

Outline Drawing (mm)

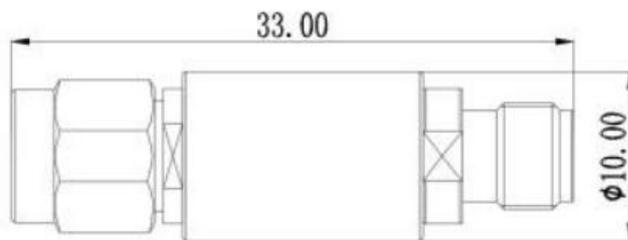

Part Number	Frequency Range(GHz)	Attenuation Value & Accuracy (dB)					VSWR (Max.)
		1-9	10	20	30	40	
CA2-XX-3.5-26.5	DC-26.5	±0.8	±0.8	-0.6/+1.0	-0.8/+1.5	±1.0	1.25

* xx refer to attenuator value in dB.

Notes:

1. The coaxial fixed attenuator must pay attention to the power input direction.
2. Input power shall meet the requirements of the power derating.