


3.5mm, DC-26.5GHz, 5W

Electrical Specifications

- ✧ **Nominal Impedance:** 50 Ω
- ✧ **Average Power:** 5W
- ✧ **Peak Power:** 0.5KW (5μs Pulse, 1% Duty Cycle)
- ✧ **Connector Type:** 3.5mm (Male/Female)
- ✧ **Operating Temperature:** -55°C to +125°C
- ✧ **Dimension:** Φ16.5x33mm
- ✧ **Net Weight:** 10.2g
- ✧ **RoHS Compliant**

Outline Drawing (mm)

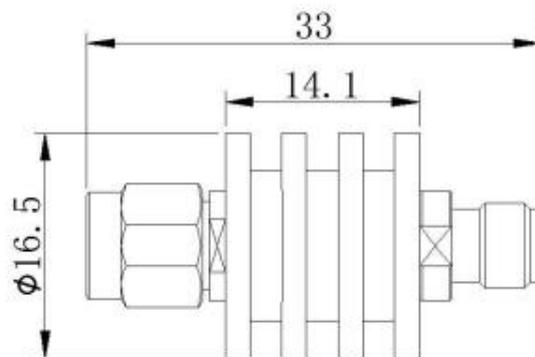

Part Number	Frequency Range (GHz)	Attenuation Value & Accuracy (dB)						VSWR (Max.)
		1-9	10-19	20-30	40	50	60	
CA5-XX-3.5-26.5	DC-26.5	±1.0	-0.5/+1.2	-0.5/+1.2	-0.5/+1.2	-0.5/+1.5	-0.5/+1.5	1.25

* xx refer to attenuator value in dB.

Notes:

1. The coaxial fixed attenuator must pay attention to the power input direction.
2. Input power shall meet the requirements of the power derating.