


3.5mm, DC-26.5GHz, 50W

Electrical Specifications

- ◇ **Nominal Impedance:** 50 Ω
- ◇ **Average Power:** 50W
- ◇ **Peak Power:** 1KW (5μs Pulse, 5% Duty Cycle)
- ◇ **Connector Type:** 3.5mm (Male/Female)
- ◇ **Operating Temperature:** -55℃ to +125℃
- ◇ **Dimension:** Φ63x67mm
- ◇ **Net Weight:** 180g
- ◇ **RoHS Compliant**

Outline Drawing (mm)

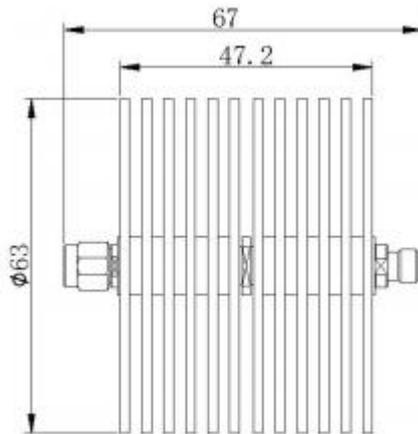

Part Number	Frequency Range(GHz)	Attenuation Value & Accuracy (dB)						VSWR (Max.)
		1-9	10-19	20-30	40	50	60	
CA50-XX-3.5-26.5	DC-26.5	-1.5/+2.5			-1.5/+2.5			1.35

* xx refer to attenuator value in dB.

Notes:

1. The coaxial fixed attenuator must pay attention to the power input direction.
2. Input power shall meet the requirements of the power derating.