


SMA, DC-6GHz, 100W

Electrical Specifications

- ◇ **Nominal Impedance:** 50Ω
- ◇ **Average Power:** 100W
- ◇ **Peak Power:** 1KW (5μs Pulse, 10% Duty Cycle)
- ◇ **Connector Type:** SMA (Male)
- ◇ **Operating Temperature:** -55°C to +125°C
- ◇ **Dimension:** 120x100x60mm
- ◇ **Net Weight:** 1.1kg
- ◇ **RoHS Compliant**

Outline Drawing (mm)

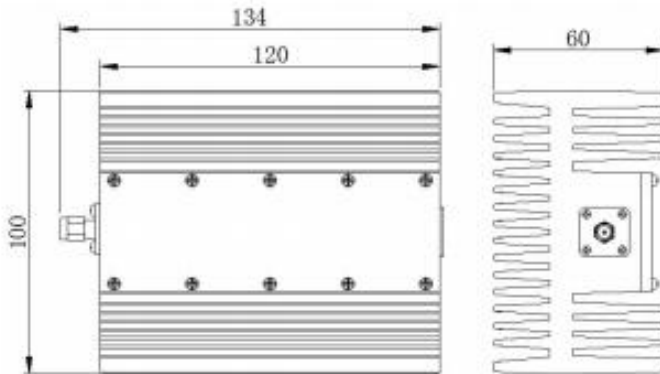

Part Number	Frequency Range(GHz)	VSWR (Max.)	Peak Power (KW)	Dimension (mm)
CT50-100-S-3-A	DC-3	1.30	1KW (5μS Pulse Width, 10% Duty Cycle)	120x100x60
CT50-100-S-6-A	DC-6	1.35		

Notes:

1. The input power should comply with the requirements of the power derating curve.