


SMA, DC-18GHz, 30W

Electrical Specifications

- ◇ **Nominal Impedance:** 50Ω
- ◇ **Average Power:** 30W
- ◇ **Peak Power:** 0.5KW (5μs Pulse, 5% Duty Cycle)
- ◇ **Connector Type:** SMA (Male)
- ◇ **Operating Temperature:** -55℃ to +125℃
- ◇ **Dimension:** Φ45x65mm
- ◇ **Net Weight:** 120g
- ◇ **RoHS Compliant**

Outline Drawing (mm)

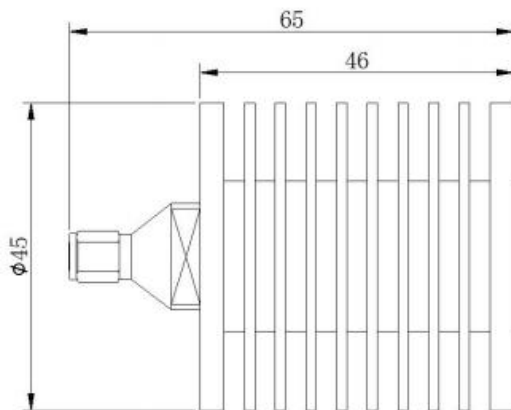

Part Number	Frequency Range(GHz)	VSWR (Max.)	Peak Power (KW)	Dimension (mm)
CT50-30-S-6-A	DC-6	1.20	0.5KW (5μS Pulse Width, 5% Duty Cycle)	Φ45x65
CT50-30-S-12.4-A	DC-12.4	1.30		
CT50-30-S-18-A	DC-18	1.35		

Notes:

1. The input power should comply with the requirements of the power derating curve.