


N, DC-6GHz, 300W

Electrical Specifications

- ◇ **Nominal Impedance:** 50Ω
- ◇ **Average Power:** 300W
- ◇ **Peak Power:** 10KW (5μs Pulse, 3% Duty Cycle)
- ◇ **Connector Type:** N (Male or Female)
- ◇ **Operating Temperature:** -55℃ to +125℃
- ◇ **Dimension:** 200x142x65mm (M/F), Φ64x334mm (M)
- ◇ **Net Weight:** 3.5kg
- ◇ **RoHS Compliant**

Outline Drawing (mm)

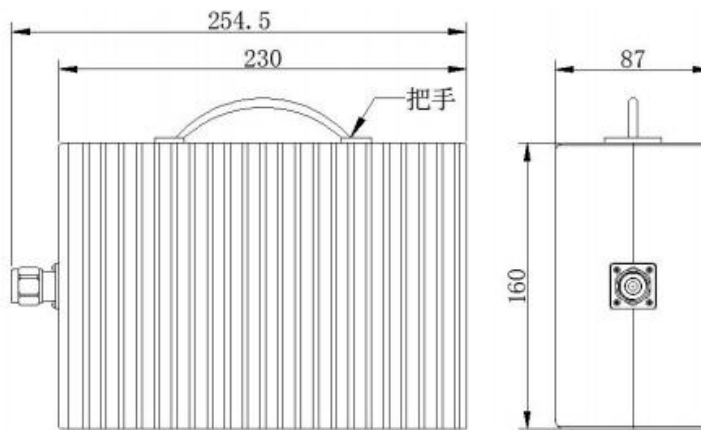

Part Number	Frequency Range(GHz)	VSWR (Max.)	Peak Power (KW)	Dimension (mm)
CT50-300-N-3-A	DC-3	1.25	10KW (5μS Pulse Width, 3% Duty Cycle)	230x160x87(M/F)
CT50-300-N-6-A	DC-6	1.40		

Notes:

1. The input power should comply with the requirements of the power derating curve.