




6	Cushion	Low density polythene
5	Glass part	Toughened glass
4	Pin	Forged steel
3	Cement	High strength cement
2	Cotter pin	Stainless steel
1	Cap	Malleable cast iron

Mark on the cap and the glass shell
 -Mechanical failing load:100 (on the cap)
 -Trade mark of the manufacture QX(on the cap)
 -Year of the manufacture(on the glass shell)

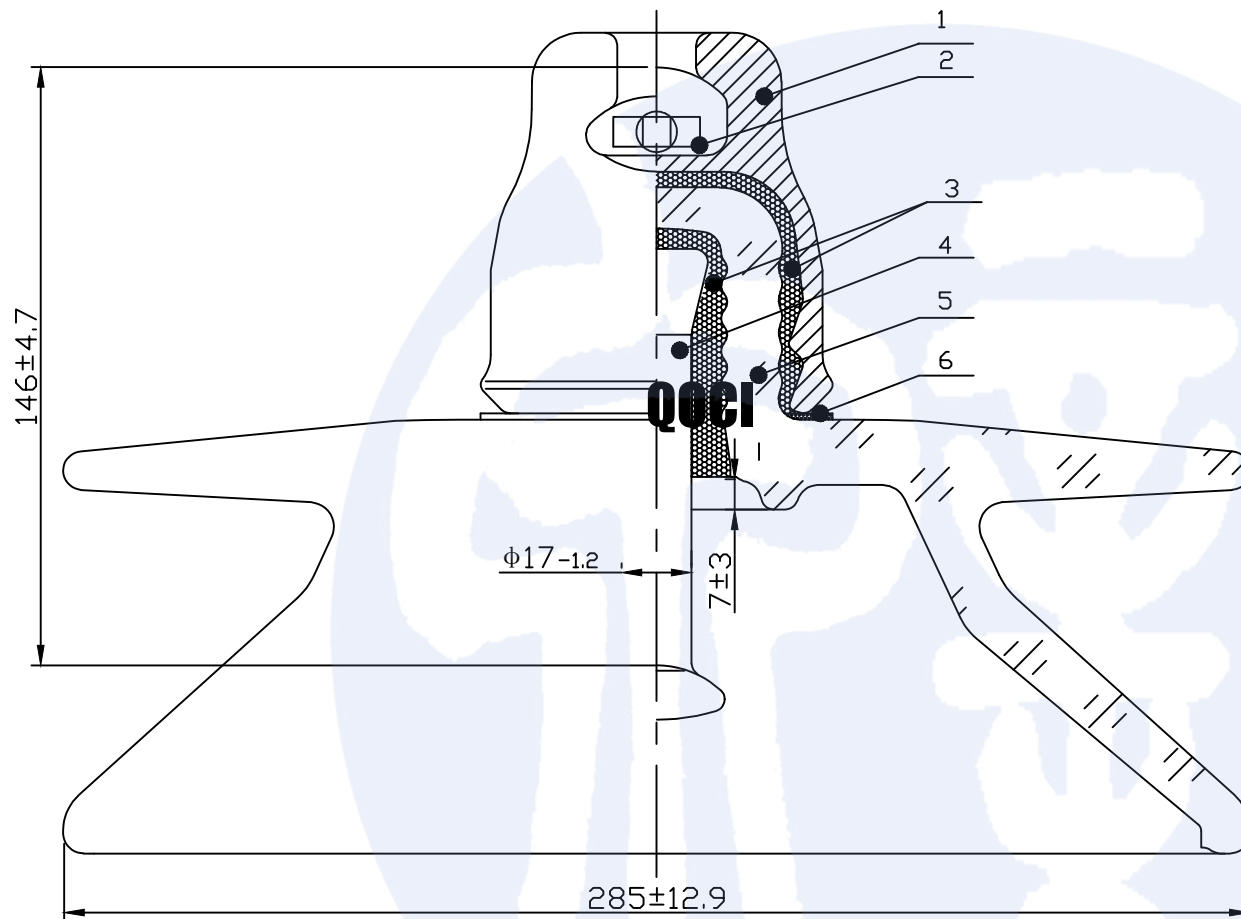

Technical parameters

Mechanical failing load	100kN
Nominal creepage distance	450mm
Standard coupling(clevis)	16R
Dry lighting impulse withstand voltage	120kV
Power frequency withstand voltage wet	45kV
Power frequency puncture voltage	110kV
Impulse puncture voltage	2.8 p.u
Radio interference voltage(10kV,1MHz)	50μV
Corona visual test	18/22kV

Jiangxi QOCI Electric CO.,LTD.

Click to visit the official website

Design		Standard		Marker	
Num		Sigh			
Audit		Date		Weight	5.4kg
Notes		Approved		Scale	1:1



QOCI

DOUBLE-SHED PROFILE
TOUGHENED DISC
GLASS INSULATOR

U100BLD/146