


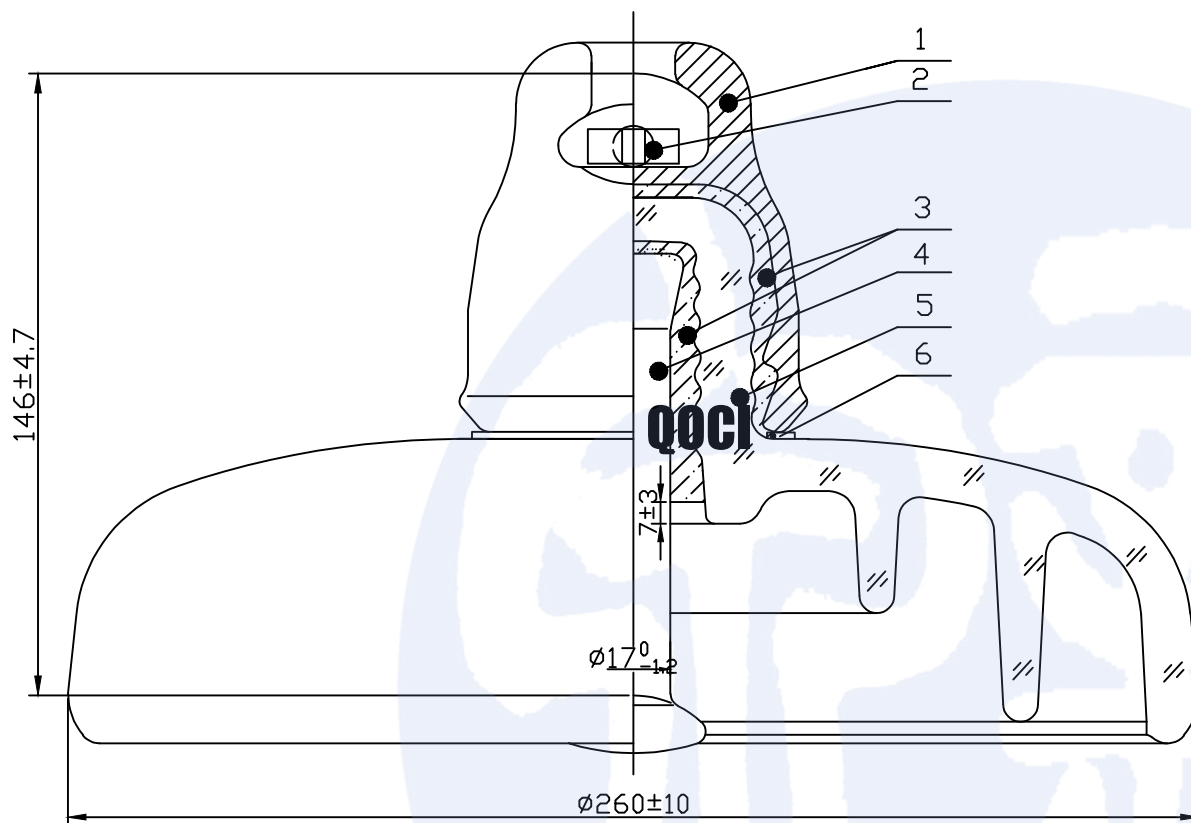

6	Cushion	Low density polythene
5	Glass part	Toughened glass
4	Pin	Forged steel
3	Cement	High strength cement
2	Cotter pin	Stainless steel
1	Cap	Malleable cast iron

Mark on the cap and the glass shell

-Mechanical failing load:70 (on the cap)

-Trade mark of the manufacture QX(on the cap)

-Year of the manufacture(on the glass shell)



Technical parameters

Mechanical failing load	120kN
Lighting impulse withstand voltage	100kV
Power frequency withstand voltage wet	40kV
Power frequency puncture voltage	130kV
Impulse puncture voltage	2.8 p.u
Radio interference voltage	50µv
Corona visual test	18/22kV
Power frequency electric arc voltage	0.12s/20kA
Nominal creepage distance	400mm
Net weight (Approximate)	5kg
Standard coupling	16R

Jiangxi QOCI Electric CO.,LTD.

Click to visit the official website

Design	Standard	Marker
Num	Sigh	
Audit	Date	Weight 5kg
Notes	Approved	Scale 1:1



ANTI-POLLUTION PROFILE
TOUGHENED DISC
GLASS INSULATOR

U120BP/146