




6	Cushion	Low density polythene
5	Glass part	Toughened glass
4	Pin	Forged steel
3	Cement	High strength cement
2	Cotter pin	Stainless steel
1	Cap	Malleable cast iron

Mark on the cap and the glass shell
 -Mechanical failing load:160 (on the cap)
 -Trade mark of the manufacture:QX(on the cap)
 -Year of the manufacture(on the glass shell)

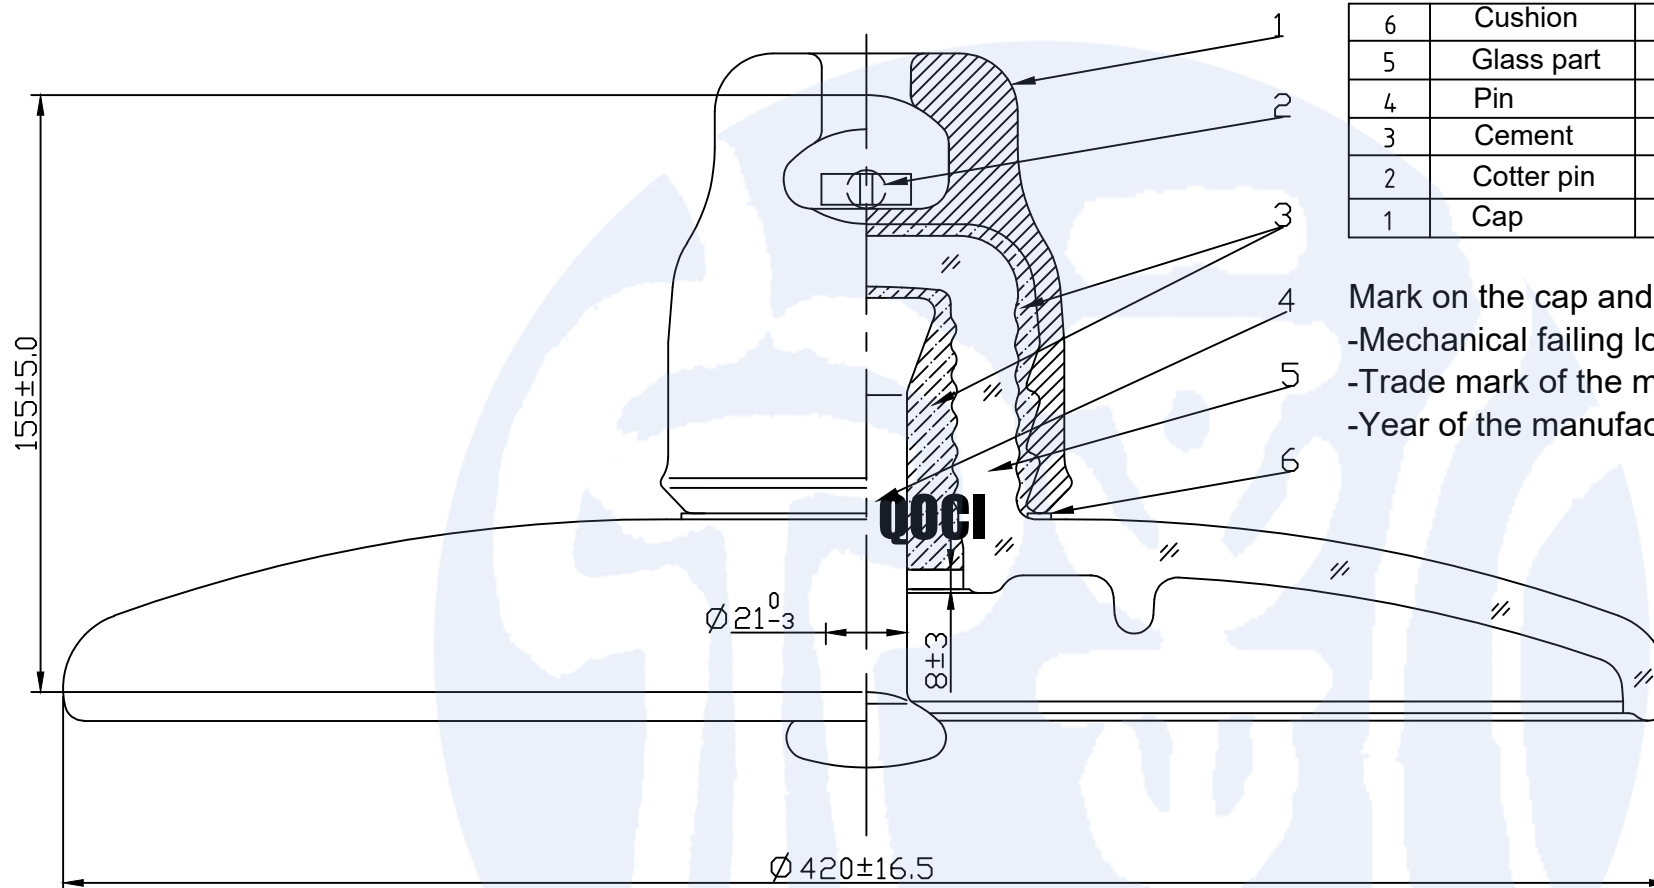

Technical parameters

Mechanical failing load	160kN
Nominal creepage distance	380mm
Standard coupling	20R
Dry lighting impulse withstand voltage	95kV
Power frequency withstand voltage wet	50kV
Power frequency puncture voltage	130kV
Impulse puncture voltage	2.8 p.u
Radio interference voltage(10kV,1MHz)	50μV
Corona visual test	18/22kV

Jiangxi QOCI Electric CO.,LTD. Click to visit the official website							 	OPEN PROFILE TOUGHENED DISC GLASS INSULATOR
Design		Standard		Marker				
Num		Sigh						
Audit		Date		Weight	7.3kg			
Notes		Approved		Scale	1:1			
							U160BMA/155	