


TECHNICAL DATA

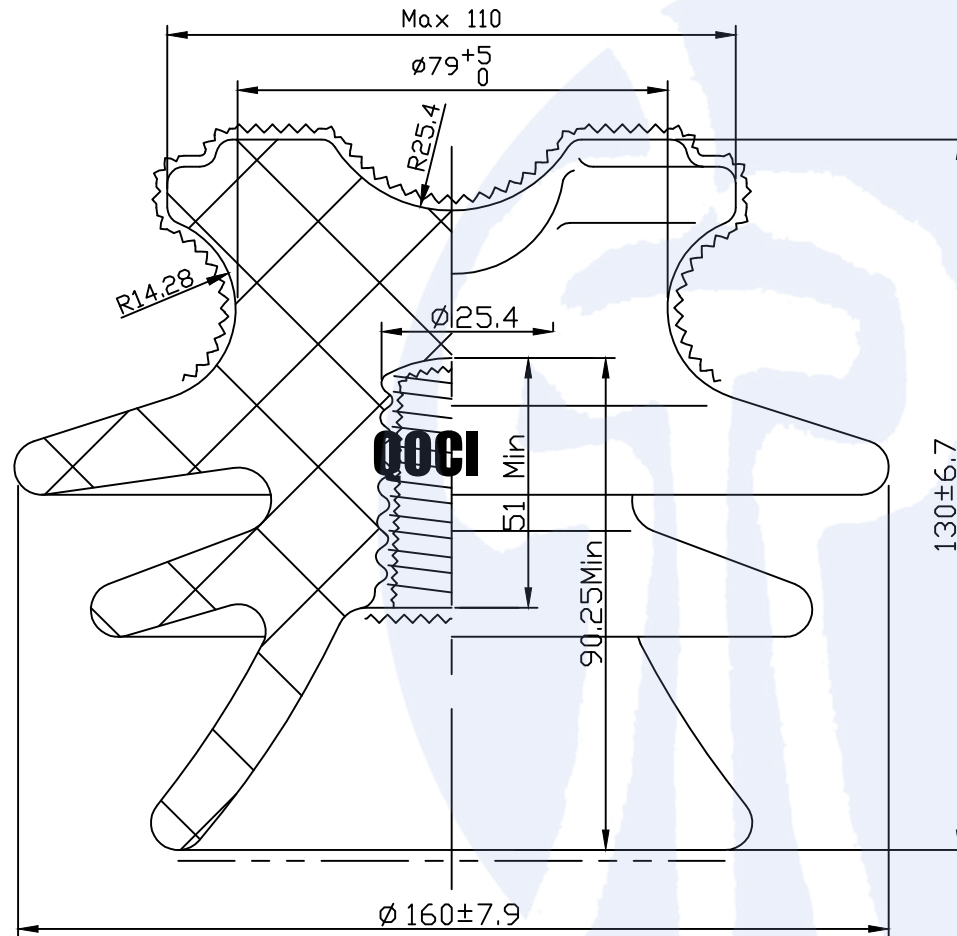

Type

Standard Applied

Main Dimensions

D:

H:

Leakage Distance

Cantilever Strength Load

Low Frequency Dry Flashover Voltage

Low Frequency Wet Flashover Voltage

Critical Impulse Flashover(positive)
(negative)

Power-Frequency Puncture Voltage

Radio-Influence Voltage

Test Voltage to Ground

Maximum RIV, at 1000kHz

Visual and Dimensional Inspection According to IEC 383

MATERIAL: PORCELAIN

ANSI 55-4M

ANSI C29.5

160mm

130mm

280mm

13.35kN

65kV

35kV

105kV

130kV

95kV

10kV

50 μ V**Jiangxi QOCI Electric CO.,LTD.**

Click to visit the official website

Design		Standard		Marker	
Num		Sigh			
Audit		Date		Weight	
Notes		Approved		Scale	1:1

**QOCI**Pin Type
Porcelain Insulator**ANSI 55-4**