


TECHNICAL DATA

Type	ANSI 56-3R
Standard Applied	ANSI C29.6
Main Dimensions	D: 267mm
	H: 222mm
Leakage Distance	570mm
Dry Arcing Distance	268mm
Cantilever Strength Load	13.35kN
Low Frequency Dry Flashover Voltage	125kV
Low Frequency Wet Flashover Voltage	80kV
Critical Impulse Flashover (Positive)	200kV
	(Negative) 265kV
Low Frequency Puncture Voltage	165kV
Radio-Influence Voltage	
Test Voltage to Ground	30kV
Maximum RIV, at 1000kHz	200 μV

MATERIAL: PORCELAIN

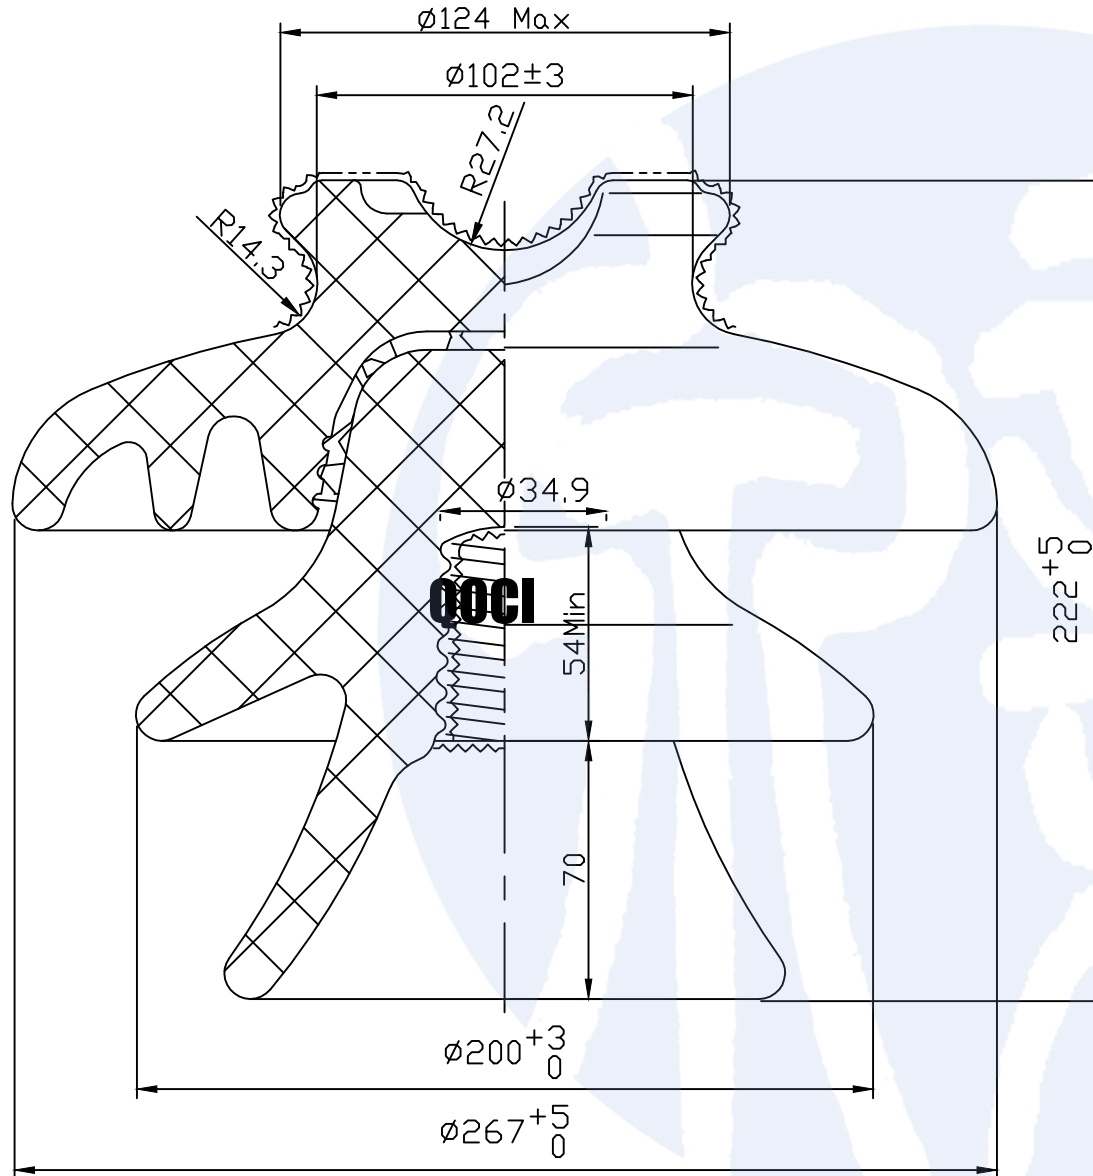

Jiangxi QOCI Electric CO.,LTD.

Click to visit the official website

Design		Standard		Marker	
Num		Sigh			
Audit		Date		Weight	
Notes		Approved		Scale	1:1



Pin Type
Porcelain Insulator

ANSI 56-3R