



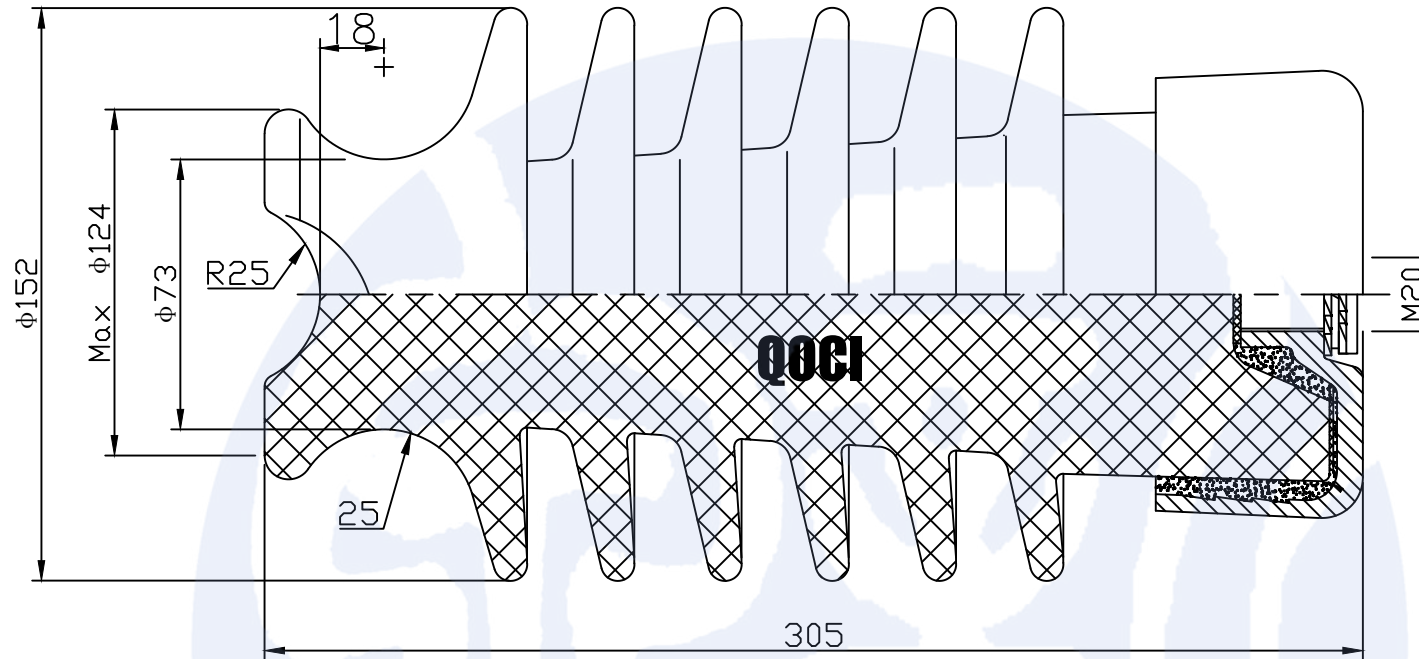

TECHNICAL DATA

Type	ANSI 57-2
Standard Applied	ANSI C29.7
Main Dimensions D:	152mm
H:	305mm
Leakage Distance	559mm
Dry Arcing Distance	241mm
Cantilever Strength	12.5kN
Low Frequency Wet Flashover Voltage	85kV
Low Frequency Dry Flashover Voltage	110kV
Critical Impulse Flashover Voltage(Pos.)	180kV
(Neg.)	205kV
Radio-Influence Voltage	
Test Voltage to Ground	22kV
Maximum RIV, at 1000kHz	100 μ V

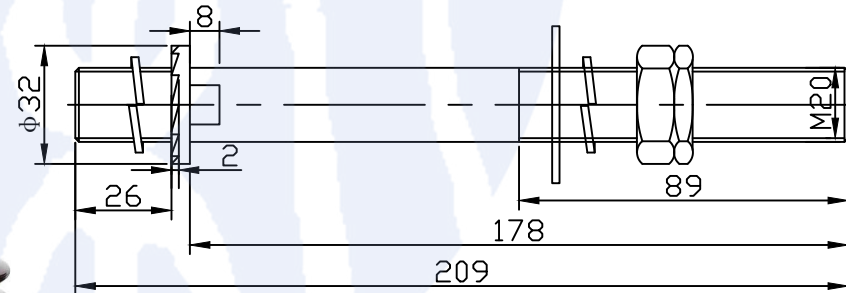

Jiangxi QOCI Electric CO.,LTD.

Click to visit the official website

Design	Standard	Marker
Num	Sigh	
Audit	Date	Weight
Notes	Approved	Scale 1:1



Line Post Type
Porcelain Insulator

ANSI 57-2