




|   |            |                       |
|---|------------|-----------------------|
| 6 | Cushion    | Low density polythene |
| 5 | Glass part | Toughened glass       |
| 4 | Pin        | Forged steel          |
| 3 | Cement     | High strength cement  |
| 2 | Cotter pin | Stainless steel       |
| 1 | Cap        | Malleable cast iron   |

Mark on the cap and the glass shell

- Mechanical failing load:240 (on the cap)
- Trade mark of the manufacture QX(on the cap)
- Year of the manufacture(on the glass shell)

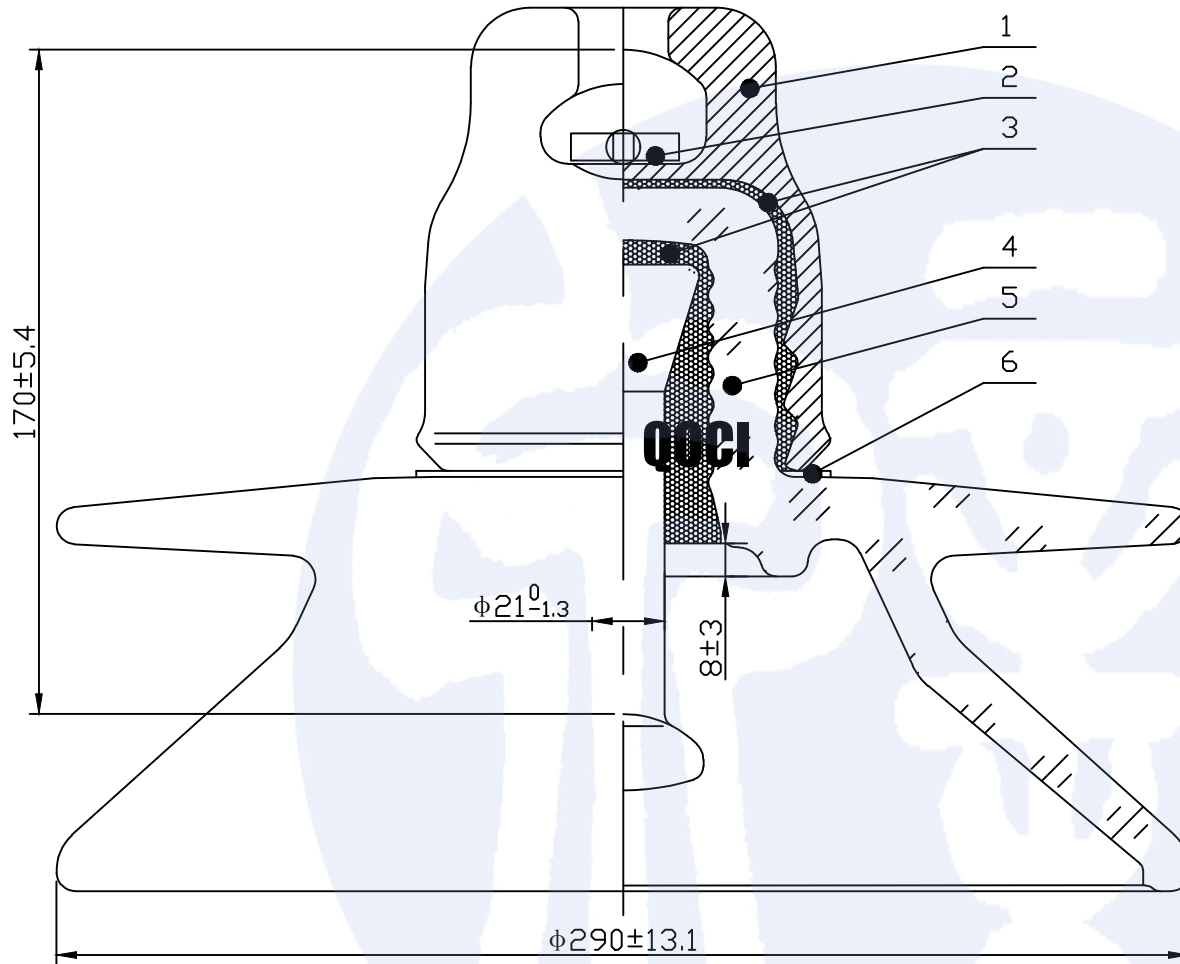

### Technical parameters

|                                        |         |
|----------------------------------------|---------|
| Mechanical failing load                | 240kN   |
| Nominal creepage distance              | 450mm   |
| Standard coupling(clevis)              | 20W     |
| Dry lighting impulse withstand voltage | 120kV   |
| Power frequency withstand voltage wet  | 45kV    |
| Power frequency puncture voltage       | 130kV   |
| Impulse puncture voltage               | 2.8 p.u |
| Radio interference voltage(10kV,1MHz)  | 50μV    |
| Corona visual test                     | 18/22kV |

### Jiangxi QOCI Electric CO.,LTD.

[Click to visit the official website](#)

|        |  |          |  |        |       |
|--------|--|----------|--|--------|-------|
| Design |  | Standard |  | Marker |       |
| Num    |  | Sigh     |  |        |       |
| Audit  |  | Date     |  | Weight | 7.5kg |
| Notes  |  | Approved |  | Scale  | 1:1   |



DOUBLE-SHED PROFILE  
TOUGHENED DISC  
GLASS INSULATOR

**U240BLD/170**