



CATALOGUE 2024



WEBSITE



WECHAT

JEYANG GOODCEN HARDWARE CO.,LTD

Address: Songshan town, Lancheng district, Jieyang City,
Guangdong Province, China

Mobile: 0086-15975163373

Tel: 0086-663-3553270

Fax: 0086-663-3554444

<https://ikehardware.en.alibaba.com>

揭阳市固盛五金有限公司

厂址: 揭阳市揭东县月城镇月城工业区

手机: 0086-15975163373

电话: 0086-663-3553270

传真: 0086-663-3554444

<https://ikehardware.en.alibaba.com>



Hinge series



Slide series

JEYANG GOODCEN HARDWARE CO.,LTD



公司介绍

揭阳市固盛五金有限公司成立于2008年，坐落在中国五金之乡。我们专业生产液压铰链、普通铰链、角度铰链、抽屉滑轨和其他家具五金系列。为了建设高标准的工厂，我们投资购买了一系列机械设备，招聘了专业和经验丰富的人才。

我们有质量检验证书。我们专业的团队将为您提供最优质的产品和优质的服务。

欢迎您来我厂参观，我们一定会是您最好的合作伙伴。

JIEYANG GOODCEN HARDWARE CO.,LTD is one of the core hardware manufacturers in China, which established in 2008.

We specialized in cabinet hinges, drawer slide and other furniture hardware series.

To building a high standard factory, we invested in purchasing a series of mechanical equipment, recruiting professional and experienced talents.

We have quality inspection certificates. The best quality products and excellent service will be provided to you by our professional team.



Welcome to visit our factory, we surely will be your best partner.



COMPANY INTRODUCTION

产品证书

PRODUCT CERTIFICATE

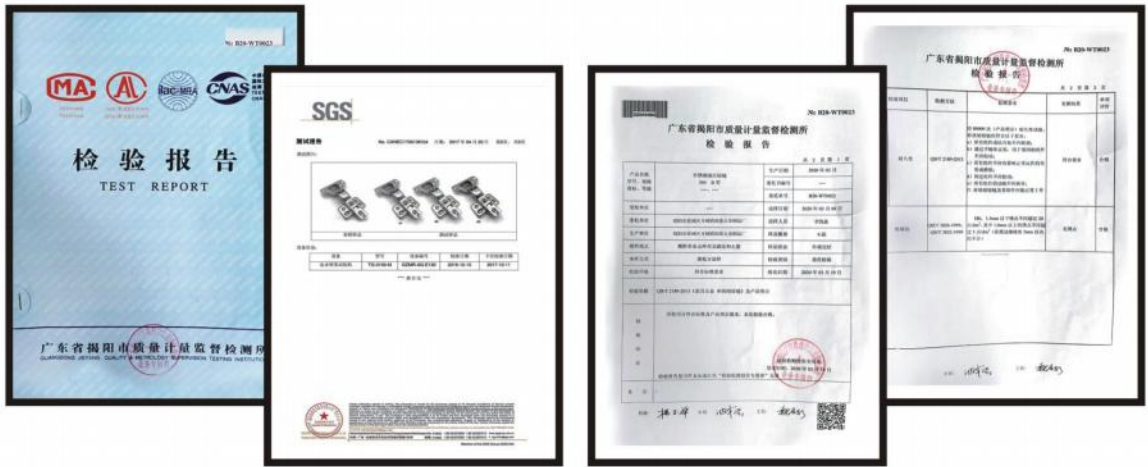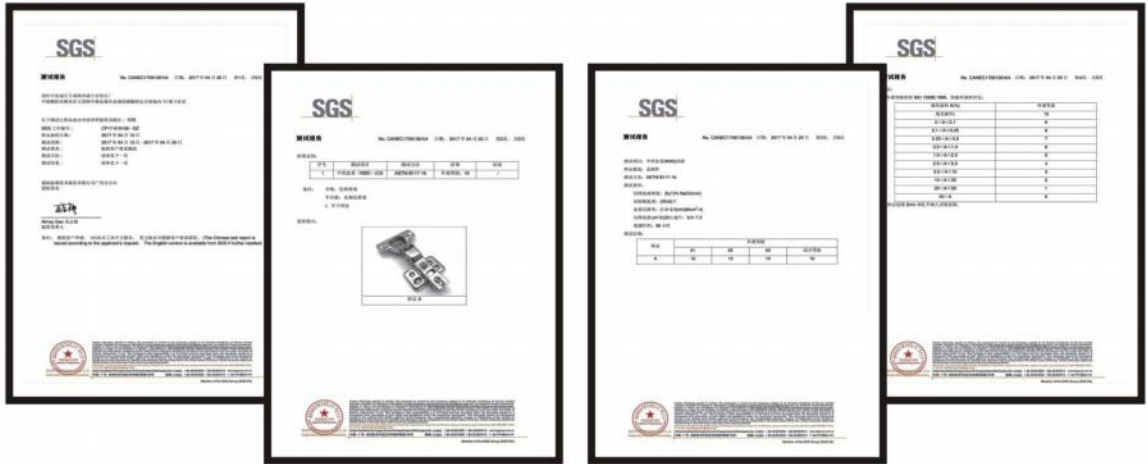

WE ALWAYS STRIVE TO MAKE BETTER PRODUCTS



EXHIBITION 展会

CONTENTS

铰链 Hinge series

P1-P12

- 液压铰链 Hydraulic hinge
- 美式铰链 American hinge
- 铝框铰链 Aluminum frame hinge
- 普通铰链 Common hinge
- 角度铰链 Angle hinge
- 其他铰链 Other hinge

滑轨 Slide series

P13-P24

- 隐藏滑轨 Concealed Drawer Slide
- 缓冲滑轨 Soft Close Drawer Slide
- 重型滑轨 Heavy duty Drawer Slide
- 双向滑轨 Bidirectional Drawer Slide
- 普通滑轨 Normal Drawer Slide
- 喷粉滑轨 Painted Drawer Slide

反弹器系列 Rebound device

P25-P28

气动支撑系列 Gas support

P29-P32

CREATING A QUALITY LIFE

Hinge Series

铰链系列

铰链，是用来连接两个固体并允许两者之间做相对转动的机械装置。铰链可由可移动的组件构成，或者由可折叠的材料构成。

铰链更多安装于橱柜上，按材质分类主要分为，不锈钢铰链和铁铰链；

为了让人们得到更好的享受又出现了液压铰链（又称阻尼铰链），其特点是在柜门关闭时带来缓冲功能，最大程度的减小了柜门关闭时与柜体碰撞发出的噪音。

A hinge is a mechanical device used to connect two solids and allow for relative rotation between them. The hinge can be composed of movable components or foldable materials.

More hinges are installed on cabinets, mainly classified by material into stainless steel hinges and iron hinges;


In order to provide people with better enjoyment, hydraulic hinges (also known as damping hinges) have emerged, which are characterized by providing buffering function when the cabinet door is closed, minimizing the noise caused by collision with the cabinet when the cabinet door is closed.



Hinge Adjustment


RIGHT/LEFT ADJUSTMENT OF DOOR 铰链门的左右调校

+5MM




一种特别发展的技术办法使门身可左右调校达5毫米，同时可利用铰链臂上的安装锁装置，重新掩盖门身后的夹缝(L初始值为0.7毫米)。

With a specially developed technical solution, it is possible to make a tight/left door adjustment up to 5mm. Also with the fitting lock device on the hinge arm, the gap behind the door can be covered (original value is 0.7mm).

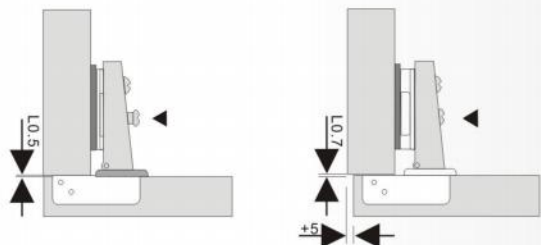


CONVENTIONAL DEPTH ADJUSTMENT 普通式深度调校

+2.5MM




扭松铰链座上两枚已紧固的螺栓，铰链座上椭圆形螺栓孔可使铰链前后移动，可使门身向前移动2.5毫米。调校完毕，应重新紧固螺栓。

By loosening the two fastened screws in the hinge base, you can move the hinge back or forth and so you can move the door forward for 2.5mm. After adjustment, remember to fasten the screws again.

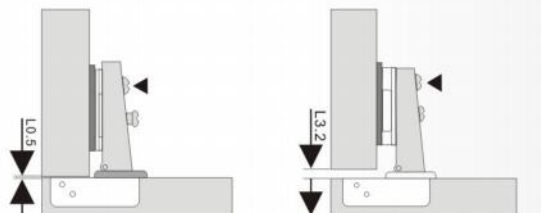


CONVENTIONAL UP/DOWN ADJUSTMENT 传统式上下调校

+1.5-1.5MM




扭松两枚已紧固的螺栓，可使柜门上下移动上1.5椭圆形螺栓孔可使铰链座向上、下两方移动。调校完毕，应重新紧固螺栓。

By loosening the two fastened screws in the hinge base, you can move the door up or down for +1.5mm. After adjustment, remember to fasten the screws again.

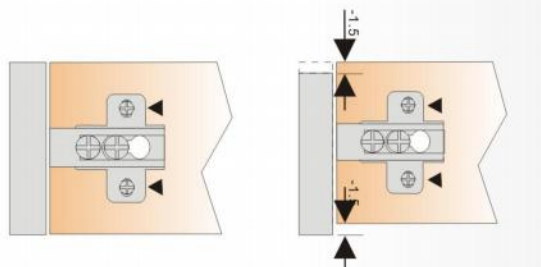

THREE-DIMENSIONAL ADJUSTMENT 三维调节

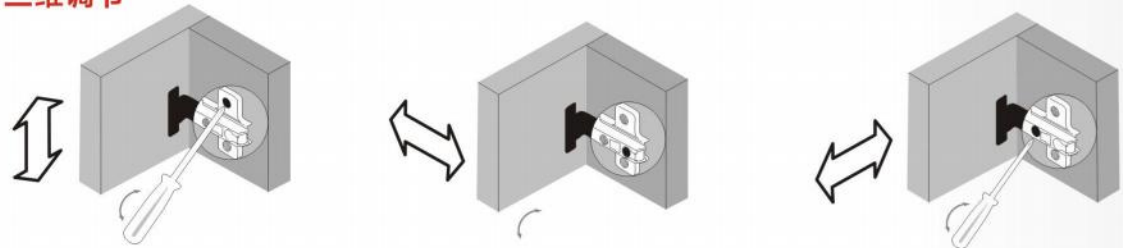


铰链调节参数

CLASSIFICATION OF HINGES 铰链的分类


铰链的弯曲程度一般可以分为以下三种：

1. 直弯：直弯铰链的铰链臂是直的，与门或窗户呈90度夹角，开合角度相对较小，适用于一些开启角度较小的门或窗户。比如普通木门、铝合金门等。
2. 中弯：中弯铰链的铰链臂呈一定程度的曲线，开合角度比直铰链稍大，和门或窗户呈120度左右夹角，适用于开启角度较大的门或窗户，比如移门、折叠门等。
3. 大弯：大弯铰链的铰链臂弯曲程度最大，和门或窗户呈135度角，开合角度相对较大。适用于开启角度较大的门或窗户，比如部分淋浴房门或折叠窗户，可以在安装位置较为狭窄的场合下更好的适应角度。

The degree of bending of hinges can generally be divided into the following three types:
1. Straight bend: The hinge arm of the straight bend hinge is straight, forming a 90 degree angle with the door or window, and the opening and closing angle is relatively small, suitable for doors or windows with small opening angles. For example, ordinary wooden doors, aluminum alloy doors, etc.
2. Mid bend: The hinge arm of a mid bend hinge forms a certain degree of curve, with a slightly larger opening and closing angle than a straight hinge, forming an angle of about 120 degrees with the door or window. It is suitable for opening doors or windows with larger angles, such as sliding doors, folding doors, etc.
3. Big Bend: The hinge arm of the big bend hinge has the highest degree of bending, forming a 135 degree angle with the door or window, and the opening and closing angle is relatively large. Suitable for doors or windows with larger opening angles, such as some shower doors or folding windows, which can better adapt to narrow installation positions.

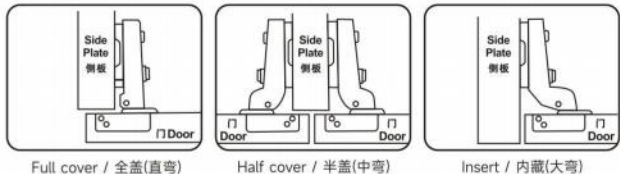


TYPE OF HINGE CUP 铰杯种类

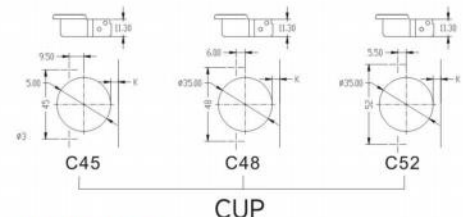

SCREW OF HINGE CUP 铰杯螺丝



HINGE BASE 铰链底座

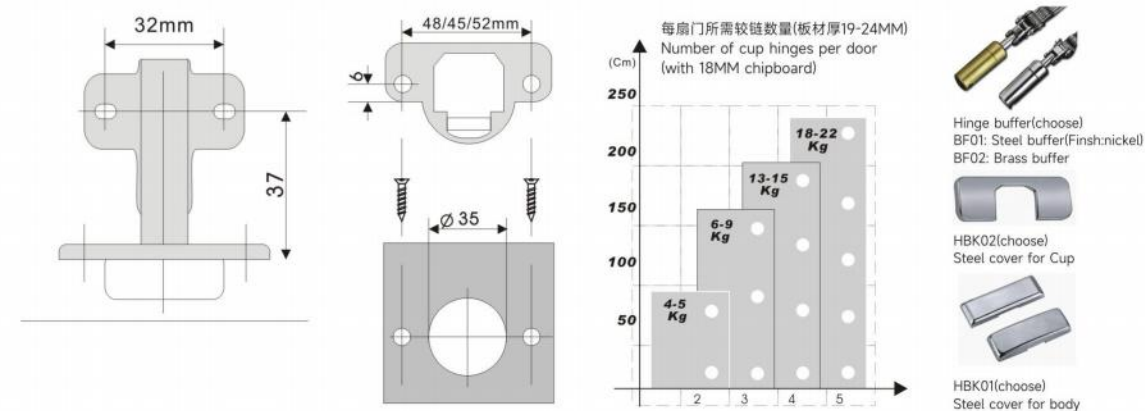

Hinge Series

35mm Cup SS Hydraulic Hinge / 不锈钢可泡水系列

Full cover / 全盖(直弯) Half cover / 半盖(中弯) Insert / 内藏(大弯) Back / 背面



GC304 SUS 304 Hydraulic Hinge



GC2.0 Full SS 2.0 Hydraulic Hinge




GC1.5 Full SS 1.5 Hydraulic Hinge



GCN863 Half SS Hydraulic Hinge

Material/材质: Stainless steel/不锈钢
Angle of opening/开启角度: 95°-110°
Cup diameter/杯直径: 35mm
Depth/深度: 11.5mm
Hole pitch/孔距: 48mm
Door thickness/门板厚度: 14-20mm

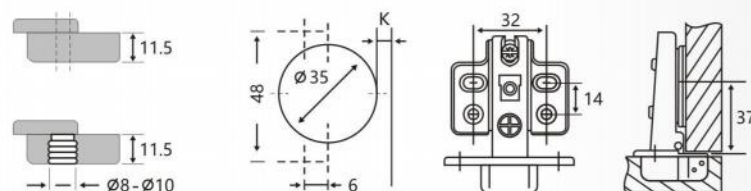

铰链系列

35mm Cup 3D Hydraulic Hinge / 三维调节铰链系列

Full cover / 全盖(直弯) Half cover / 半盖(中弯) Insert / 内藏(大弯) Back / 背面



GC826 3D04 Iron 3D Hydraulic Nickel hinge



GC826 3D06 Iron 3D Hydraulic Gun black hinge with 6 hole




GCM 3D14 Iron 3D Hydraulic



GC3D04 SS or Iron 3D Hydraulic hinge

Material/材质: Stainless steel/Iron
Angle of opening/开启角度: 95°-110°
Cup diameter/杯直径: 35mm
Depth/深度: 11.5mm
Hole pitch/孔距: 48mm
Door thickness/门板厚度: 14-20mm

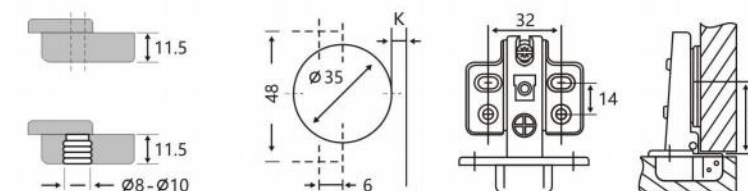

Hinge Series

Aluminum Frame Hinge / 铝框铰链系列

Full cover / 全盖(直弯) Half cover / 半盖(中弯) Insert / 内藏(大弯) Back / 背面



AF826B Slide-on Aluminum Frame Black Hinge




AF826G Slide-on Aluminum Frame Gold Hinge



AF836N Slide-on Aluminum Frame Nikcel Hinge



AF826 3D06 Aluminum Frame 3D Gun Black Hinge with 6 hole

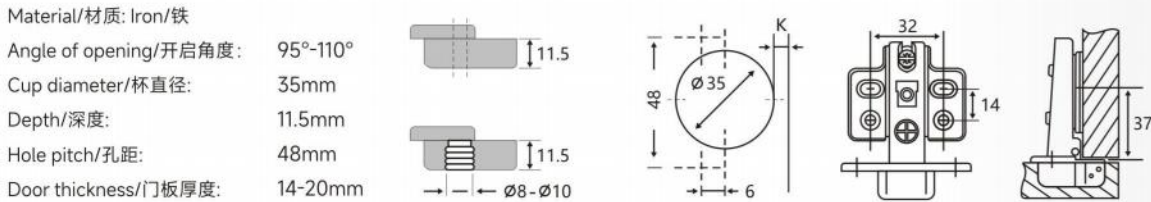

铰链系列

American Short arm Hinge / 美式短臂系列

Full cover / 全盖(直弯) Half cover / 半盖(中弯) Insert / 内藏(大弯) Back / 背面



SA1H Stainless Steel Short Arm Hinge With Normal screw




SA2 Stainless Steel Short Arm Hinge With 2D screw



SA1H Iron Short Arm Hinge With Normal screw



SA2 Iron Short Arm Hinge With 2D screw

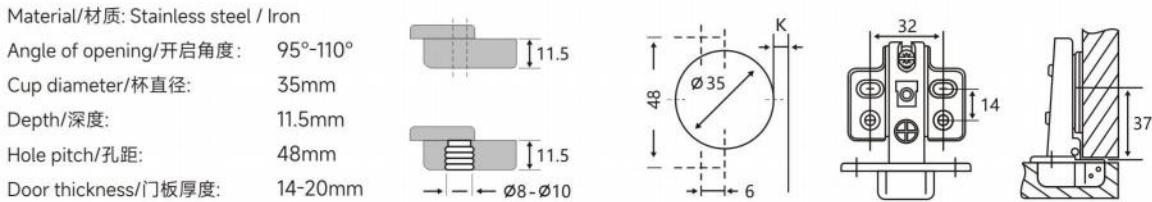

Hinge Series

35mm Cup Hinge With Hook / 35杯铰链带钩系列

Full cover / 全盖(直弯) Half cover / 半盖(中弯) Insert / 内藏(大弯) Back / 背面



AF261 Iron Normal Hinge With Hook



AF6264 Iron Hydraulic Hinge With Hook




AF3D Iron Hydraulic 3D Hinge With Hook



AFSS SS Hydraulic Hinge With Hook

Material/材质: Stainless steel / Iron
Angle of opening/开启角度: 95°-110°
Cup diameter/杯直径: 35mm
Depth/深度: 11.5mm
Hole pitch/孔距: 48mm
Door thickness/门板厚度: 14-20mm

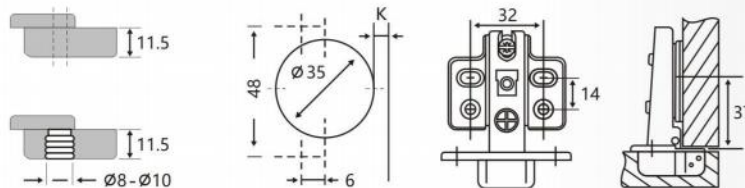

铰链系列

Special Angle hinge / 特殊角度铰链



Full cover / 全盖(直弯) Half cover / 半盖(中弯) Insert / 内藏(大弯)

165°hinge / 165°铰链



135°hinge / 135°铰链 90°hinge / 90°铰链 45°hinge / 45°铰链




30°hinge / 30°铰链 -30°hinge / -30°铰链 -45°hinge / -45°铰链



45° 3Dhinge / 45° 3D铰链 90° 3Dhinge / 90° 3D铰链 165° 3Dhinge / 165° 3D铰链

Material/材质: Stainless steel/ 不锈钢
Angle of opening/开启角度: 95°-110°
Cup diameter/杯直径: 35mm
Depth/深度: 11.5mm
Hole pitch/孔距: 48mm
Door thickness/门板厚度: 14-20mm

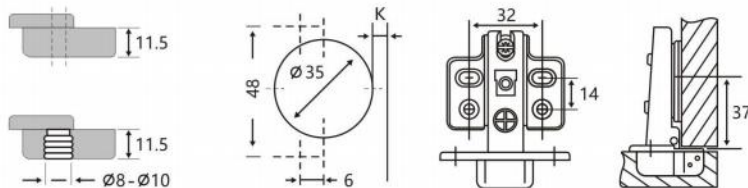

Hinge Series

Special angle aluminum frame hinge / 特殊角度铝框铰链



165°aluminum frame hinge / 165°铝框铰链



135°hinge / 135°铰链 90°hinge / 90°铰链 45°hinge / 45°铰链



30°hinge / 30°铰链 -30°hinge / -30°铰链 -45°hinge / -45°铰链



3-inch regular model / 3寸普通款 4-inch regular model / 4寸普通款 4-inch hydraulic version / 4寸液压款

Frog Hinge / 青蛙铰链

铰链系列

35mm Cup Normal Iron hinge / 常规铁铰链

Full cover / 全盖(直弯) Half cover / 半盖(中弯) Insert / 内藏(大弯) Back / 背面



F261 Slide-on Iron Hydraulic hinge



F263 Slide-on Iron Hydraulic hinge



261 Slide-on Iron Normal hinge



A8 Slide-on Iron Normal hinge

Material/材质: Iron/铁


Angle of opening/开启角度: 95°-110°

Cup diameter/杯直径: 35mm

Depth/深度: 11.5mm

Hole pitch/孔距: 48mm

Door thickness/门板厚度: 14-20mm

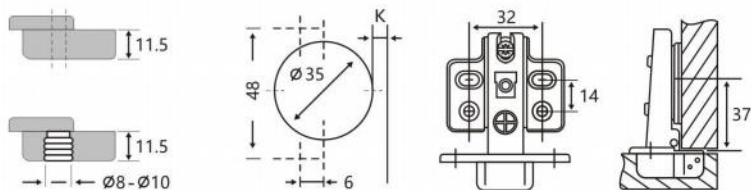

Hinge Series

26mm cup normal hinge / 26杯普通铰链

Full cover / 全盖(直弯) Half cover / 半盖(中弯) Insert / 内藏(大弯) Back / 背面



2602 Small Iron Normal hinge



2604 Small Iron Normal hinge



26SA Small Iron Short arm Hinge



26G Small Iron Hydraulic/Normal Glass Door Hinge

Material/材质: Iron/铁


Angle of opening/开启角度: 95°-110°

Cup diameter/杯直径: 35mm

Depth/深度: 11.5mm

Hole pitch/孔距: 48mm

Door thickness/门板厚度: 14-20mm

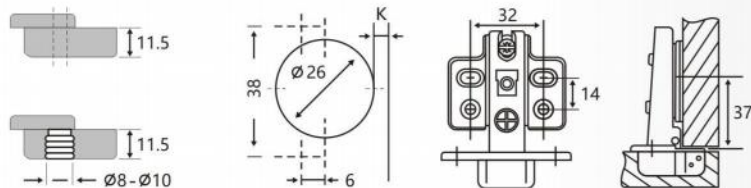

铰链系列

40mm Cup Hydraulic Hinge / 40杯液压铰链系列

Full cover / 全盖(直弯) Half cover / 半盖(中弯) Insert / 内藏(大弯) Back / 背面



GC403D Iron 3D Hydraulic Hinge



GC404 Iron Hydraulic Hinge



GC403 Iron Hydraulic Hinge



GC401 Slide-on Iron Hydraulic Hinge

Material/材质: Stainless steel/Iron


Angle of opening/开启角度: 95°-110°

Cup diameter/杯直径: 35mm

Depth/深度: 11.5mm

Hole pitch/孔距: 48mm

Door thickness/门板厚度: 14-20mm

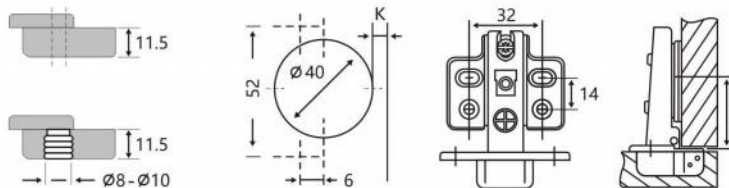

Slide Series

滑轨系列

滑轨又称导轨、滑道、是指固定在家具的柜体上，供家具的抽屉或柜板出入活动的五金连接部件。滑轨适用于橱柜、家具、公文柜、浴室柜等木制与钢制抽屉等家具的抽屉连接。

A slide rail, also known as a sliding rail or slide rail, refers to a hardware connecting component fixed on the cabinet of furniture for the drawer or cabinet board to move in and out. Sliding rails are suitable for connecting drawers of wooden and steel furniture such as cabinets, furniture, filing cabinets, bathroom cabinets, etc.




Slide Series

35mm Iron Ball Bearing Slide / 35mm宽铁走珠滑轨

Material/材质: Cold Rolled Steel 冷轧钢
Width/宽度: 35mm
Length/长度: 8inch-18inch (190mm-450mm)
Capacity/承重: 20kg
Cycle/开合: 50000times 5万次
Salt Spray Test/盐雾试验: 48H
Finish/表面处理: black镀黑 / white镀白 / printing印花
Installation/安装方法: side mount 侧面安装

Thickness Range/材料厚度:


- ① 0.5-0.8mm
- ② 0.5-0.8mm
- ③ 0.5-0.8mm




高级钢珠
High Quality Steel Ball



耐高温/低温塑料
High Temperature/Low Temperature
Resistance Plastics

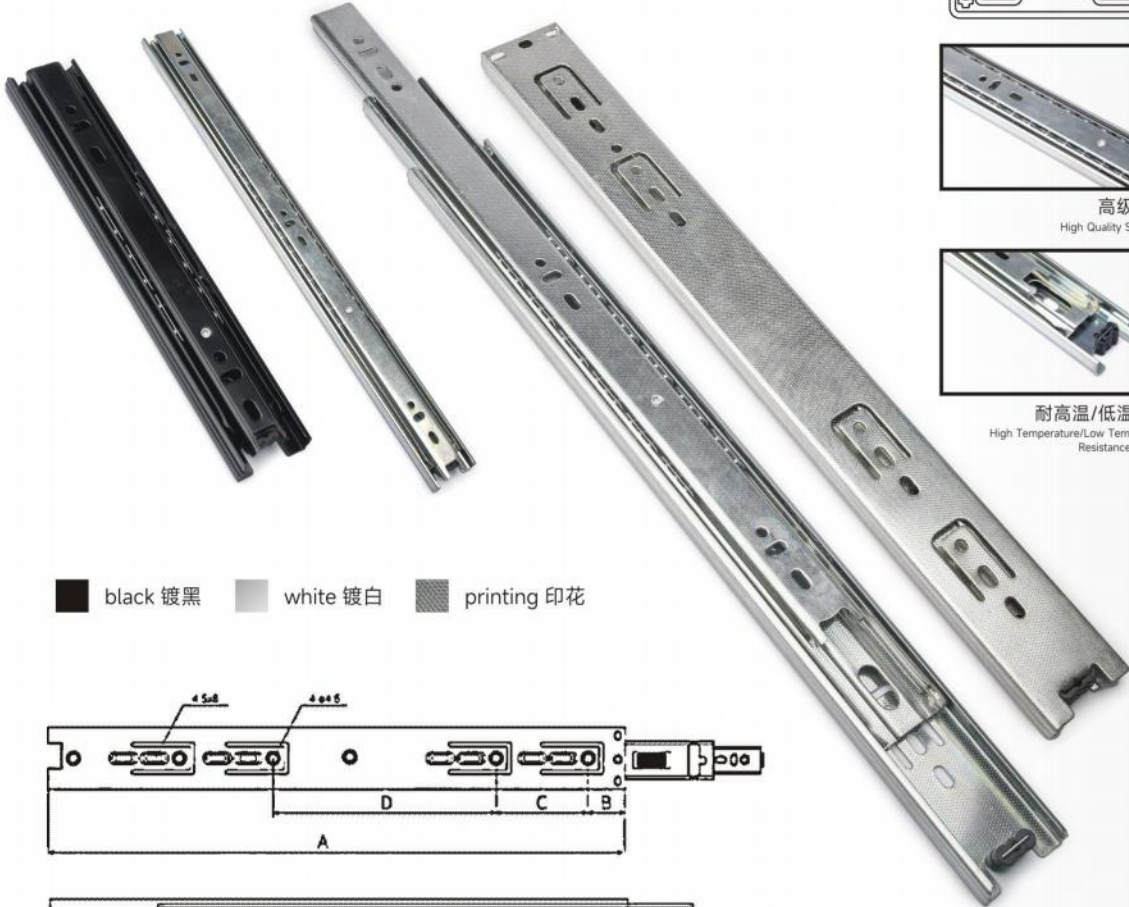

black 镀黑 white 镀白 printing 印花

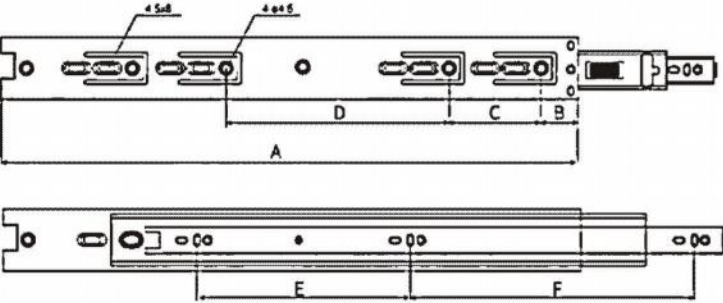

单位: mm

SIZE	A	B	C	D	E	F	G	H
8寸 8Inch	190	35	96			128		
10寸 10Inch	250	35	64	96	96	64		
12寸 12Inch	300	35	64	64	128	96		
14寸 14Inch	350	35	64	96	128	128		
16寸 16Inch	400	35	64	160	160	160		
18寸 18Inch	450	35	64	192	192	160		


滑轨系列

40mm Iron Ball Beaing Slide / 40mm宽铁走珠滑轨

Material/材质: Cold Rolled Steel 冷轧钢
Width/宽度: 40mm
Length/长度: 8inch-18inch (190mm-450mm)
Capacity/承重: 20kg
Cycle/开合: 50000times 5万次
Salt Spray Test/盐雾试验: 48H
Finish/表面处理: black镀黑 / white镀白
Installation/安装方法: side mount 侧面安装

Thickness Range/材料厚度:



- ① 0.5-0.8mm
- ② 0.5-0.8mm
- ③ 0.5-0.8mm



高级钢珠
High Quality Steel Ball



耐高温/低温塑料
High Temperature/Low Temperature
Resistance Plastics

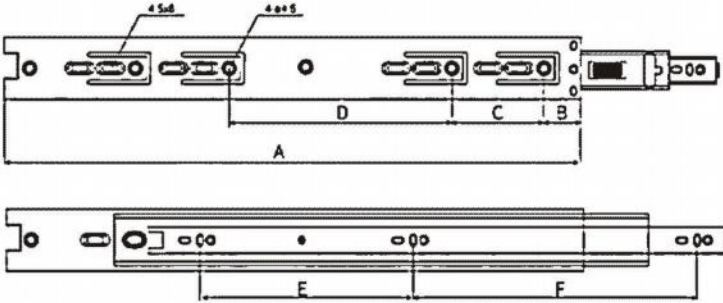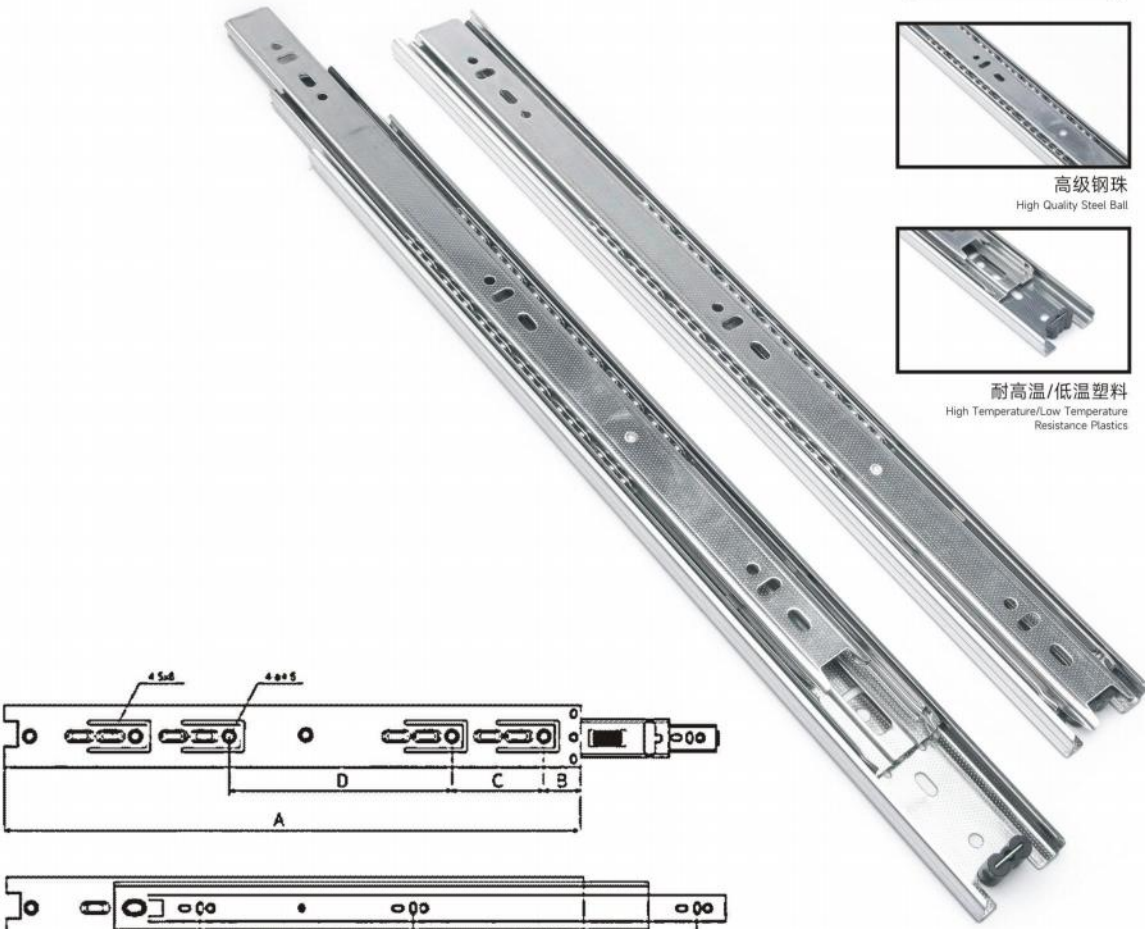

单位: mm

SIZE	A	B	C	D	E	F	G	H
8寸 8Inch	190	35	96			128		
10寸 10Inch	250	35	64	96	96	64		
12寸 12Inch	300	35	64	64	128	96		
14寸 14Inch	350	35	64	96	128	128		
16寸 16Inch	400	35	64	160	160	160		
18寸 18Inch	450	35	64	192	192	160		

Slide Series


45mm Iron Ball Beaing Slide / 45mm宽铁走珠滑轨

Material/材质: Cold rolled steel 冷轧钢
Width/宽度: 45mm
Length/长度: 8inch-24inch (190mm-600mm)
Capacity/承重: 30-45kg

Cycle/开合: 50000times 5万次
Salt Spray Test/盐雾试验: 48H
Finish/表面处理: black镀黑 / white镀白
Installation/安装方法: side mount 侧面安装

Thickness Range/材料厚度:

- ① 0.7-0.9mm
- ② 0.7-0.9mm
- ③ 0.7-0.9mm



高级钢珠
High Quality Steel Ball

耐高温/低温塑料
High Temperature/Low Temperature Resistance Plastics



单位: mm

SIZE	A	B	C	D	E	F	G	H
8寸 8Inch	190	35	96			128		
10寸 10Inch	250	35	64	96	96	96		
12寸 12Inch	300	35	64	128	128	96		
14寸 14Inch	350	35	64	96	128	128		
16寸 16Inch	400	35	64	160	192	128		
18寸 18Inch	450	35	64	96	192	160		
20寸 20Inch	500	35	64	128	224	192		
22寸 22Inch	550	35	64	160	224	224		
24寸 24Inch	600	35	64	160	256	256		

滑轨系列


45mm Iron Soft Close Slide / 45mm宽缓冲滑轨

Material/材质: Cold rolled steel 冷轧钢
Width/宽度: 45mm
Length/长度: 8inch-24inch (190mm-600mm)
Capacity/承重: 30-45kg

Cycle/开合: 50000times 5万次
Salt Spray Test/盐雾试验: 48H
Finish/表面处理: black镀黑 / white镀白
Installation/安装方法: side mount 侧面安装

Thickness Range/材料厚度:

- ① 0.7-0.9mm
- ② 0.7-0.9mm
- ③ 0.7-0.9mm



高级钢珠
High Quality Steel Ball

阻尼缓冲装置
Damping Soft-closing Device



单位: mm

SIZE	A	B	C	D	E	F	G	H
8寸 8Inch	190	35	96			128		
10寸 10Inch	250	35	64	96	96	96		
12寸 12Inch	300	35	64	128	128	96		
14寸 14Inch	350	35	64	96	128	128		
16寸 16Inch	400	35	64	160	192	128		
18寸 18Inch	450	35	64	96	192	160		
20寸 20Inch	500	35	64	128	224	192		
22寸 22Inch	550	35	64	160	224	224		
24寸 24Inch	600	35	64	160	256	256		




Slide Series

Stainless Steel Ball Bearing Slide / 不锈钢 普通滑轨

Material/材质: Stainless steel 不锈钢
Width/宽度: 45mm
Length/长度: 10inch-24inch(250mm-600mm)
Capacity/承重: 20-45kg

Cycle/开合: 50000times 5万次
Salt Spray Test/盐雾试验: 48H

Thickness Range/材料厚度:
① 0.9-1.0mm
② 0.9-1.0mm
③ 0.9-1.0mm

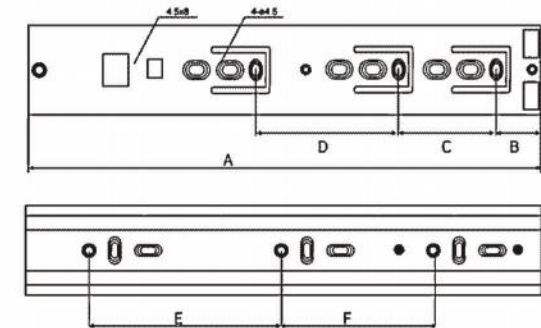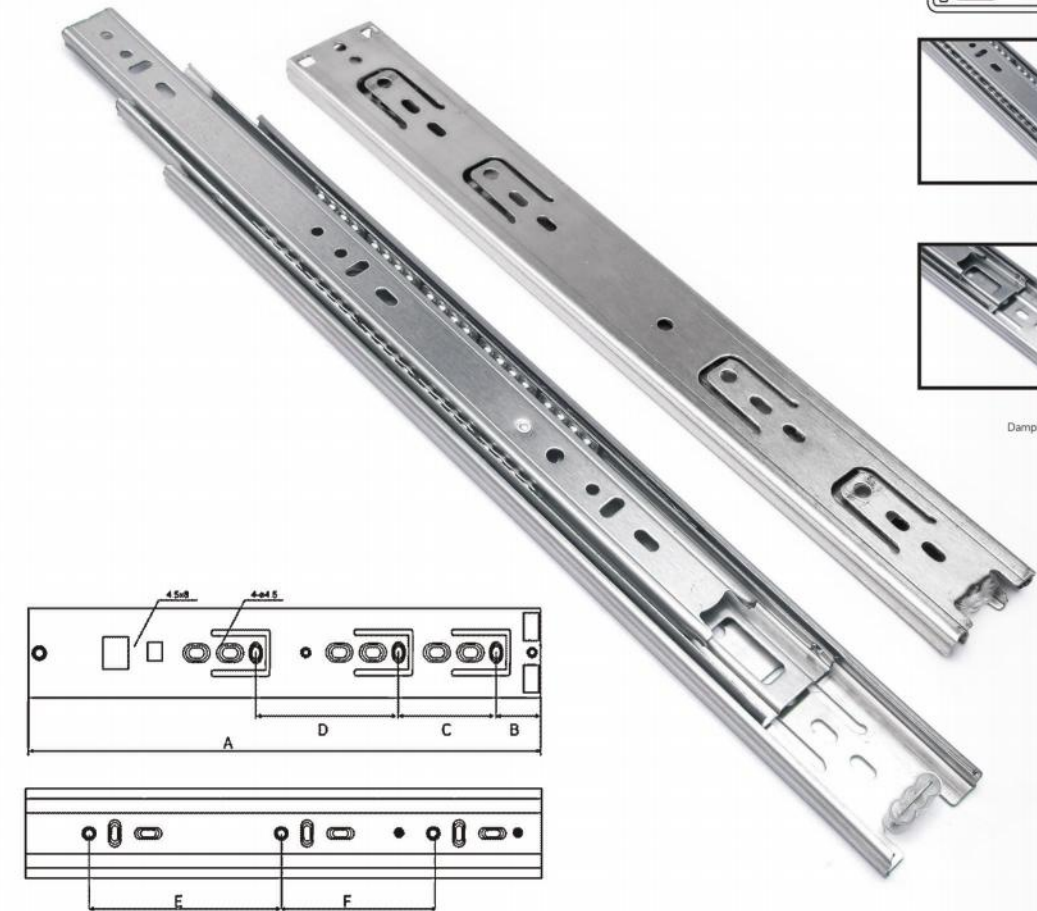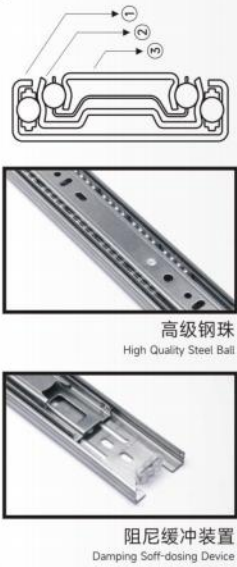

SIZE	A	B	C	D	E	F	G	H
8寸 8Inch	200	35	96			128		
10寸 10Inch	250	35	64	96	96	64		
12寸 12Inch	300	35	64	128	128	96		
14寸 14Inch	350	35	64	128	128	128		
16寸 16Inch	400	35	64	160	192	128		
18寸 18Inch	450	35	64	224	192	160		
20寸 20Inch	500	35	64	128	224	192		
22寸 22Inch	550	35	64	160	224	224		
24寸 24Inch	600	35	64	192	256	256		
26寸 26Inch	650	35	64	224	256	288		

单位: mm




滑轨系列

45mm Stainless Steel Soft Close Slide / 45mm 不锈钢 缓冲滑轨

Material/材质: Stainless steel 不锈钢
Width/宽度: 45mm
Length/长度: 10inch-24inch(250mm-600mm)
Capacity/承重: 20-45kg

Cycle/开合: 50000times 5万次
Salt Spray Test/盐雾试验: 48H

Thickness Range/材料厚度:
① 0.9-1.0mm
② 0.9-1.0mm
③ 0.9-1.0mm

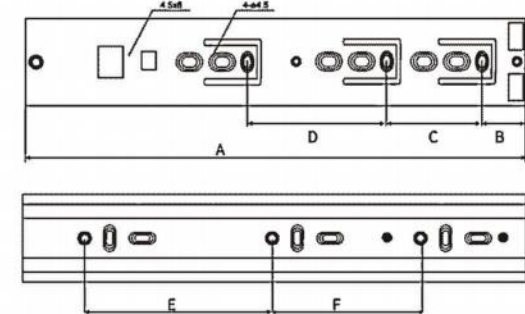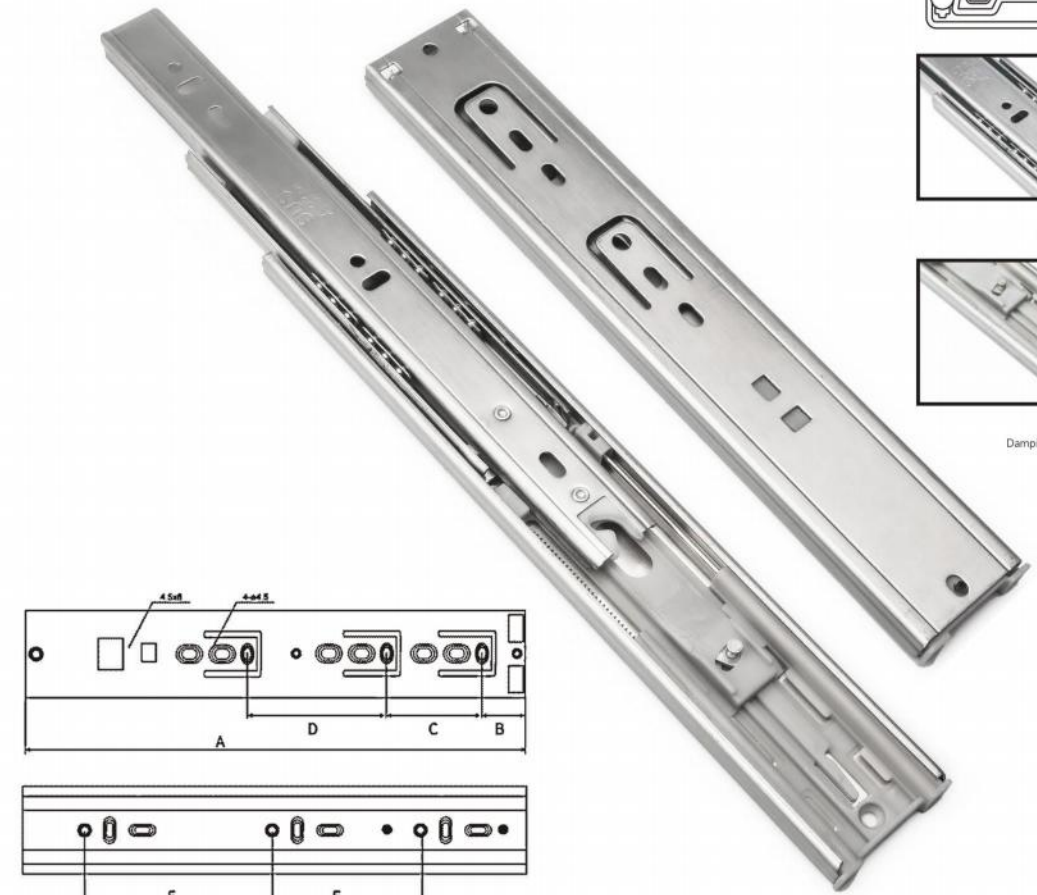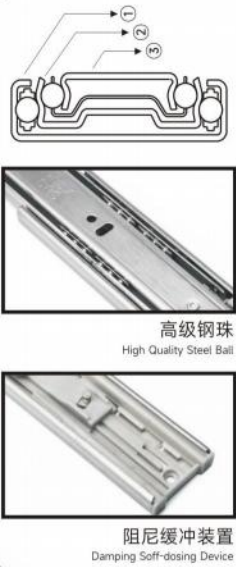

SIZE	A	B	C	D	E	F	G	H
8寸 8Inch	200	35	96			128		
10寸 10Inch	250	35	64	96	96	64		
12寸 12Inch	300	35	64	128	128	96		
14寸 14Inch	350	35	64	128	128	128		
16寸 16Inch	400	35	64	160	192	128		
18寸 18Inch	450	35	64	224	192	160		
20寸 20Inch	500	35	64	128	224	192		
22寸 22Inch	550	35	64	160	224	224		
24寸 24Inch	600	35	64	192	256	256		
26寸 26Inch	650	35	64	224	256	288		

单位: mm

Slide Series

3-Fold Soft Close Undermount Slide / 三节缓冲隐藏轨

Material/材质: Cold rolled steel 冷轧钢
Length/长度: 10inch-24inch(250mm-600mm)
Load capacity/额定负重: 35kg
Installation/安装方式: Under mount 底部安装

Cycle/开合: 50000times 5万次
Salt Spray Test/盐雾试验: 48H
Finish/表面处理: Zinc 镀锌




3D把手
3D handle



精密阻尼器
Precision damping pipe



镀锌板, 耐腐蚀
Galvanized, corrosion resistant

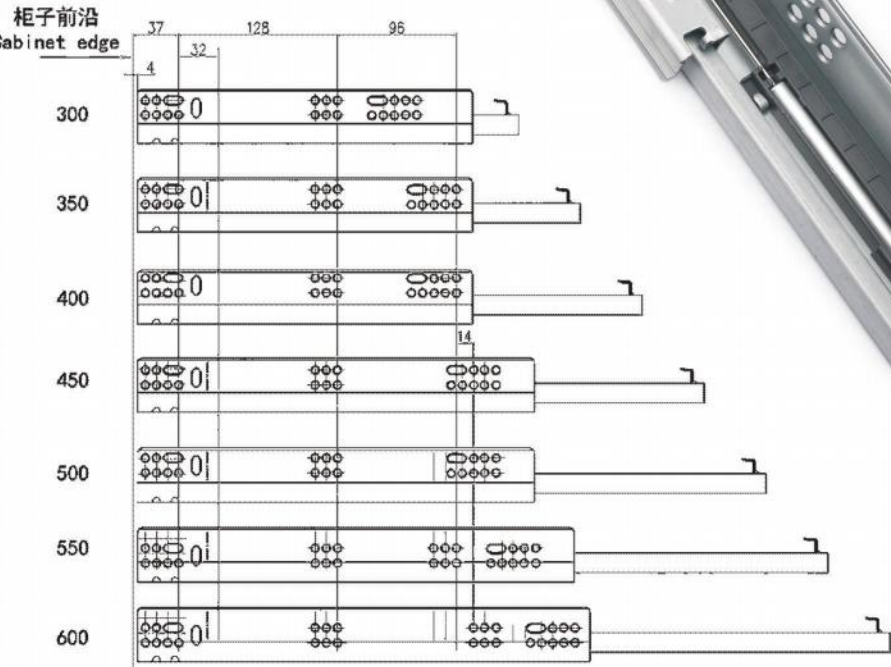

滑轨系列

FGV 2-Fold Ball Powder Slide / FGV两节喷粉滚轮滑轨

Material/材质: Cold rolled steel 冷轧钢
Thickness Range/材料厚度: 0.7/0.8/0.9/1.0/1.1mm
Length/长度: 10inch-18inch(250mm-450mm)
Capacity/承重: 10-25kg

Cycle/开合: 50000times 5万次
Finish/表面处理: Black/White/Brown powder coated 黑色/白色/棕色喷漆
Installation/安装方法: side mount 侧面安装




坚固滑轮
Durable and practical




白色喷漆
White paint does not rust

装配尺寸:
Installation measurement

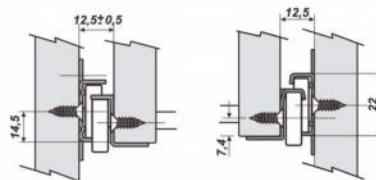

外轨头部孔位:
Drilling pattern for cabinet member

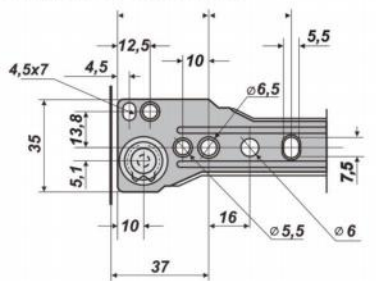

单位: mm

SIZE	A	B	C	D	E	F	G	H
10寸 10Inch	300	65	129	194	96	224	297	
12寸 12Inch	350	65	193	258	128	256	347	
14寸 14Inch	400	65	225	290	160	320	397	
16寸 16Inch	450	65	257	322	160	352	447	
18寸 18Inch	500	65	321	388	192	416	497	
20寸 20Inch								
22寸 22Inch								

Slide Series

2-Fold Soft Close Undermount Slide / 二节缓冲隐藏轨

Material/材质: Cold rolled steel 冷轧钢板
Length/长度: 10inch-24inch(250mm-600mm)
Capacity/承重: 35kg
Installation/安装方式: Under mount 底部安装


Cycle/开合: 50000times 5万次
Salt Spray Test/盐雾试验: 48H
Finish/表面处理: Zinc镀锌



精密阻尼器
Precision damping pipe



镀锌板, 耐腐蚀
Galvanized, corrosion resistant

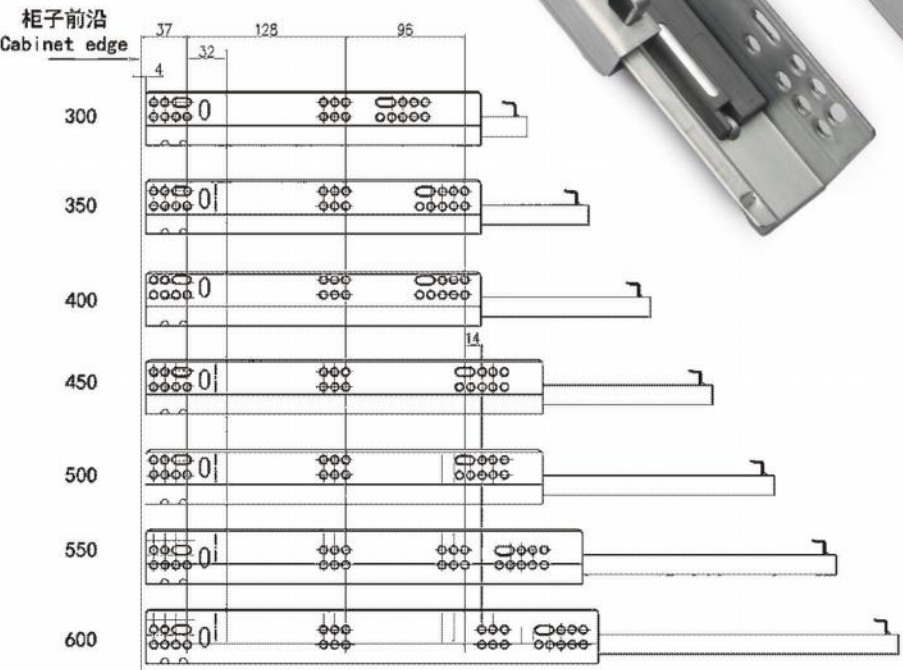


Bidirectional ball slide / 双向走珠滑轨

Material/材质: Cold rolled steel 冷轧钢
Length/长度: 8inch-24inch(182mm-438mm)
Capacity/承重: 15kg
Installation/安装方式: Under mount 底部安装

Cycle/开合: 50000times 5万次
Salt Spray Test/盐雾试验: 48H
Finish/表面处理: Blue zinc/Black 蓝锌/电泳黑处理



Thickness Range/材料厚度:
① 0.8mm-1.0mm
② 0.8mm-1.0mm



消声钢珠
Muffled ball



采用优良材料
Using high-quality materials

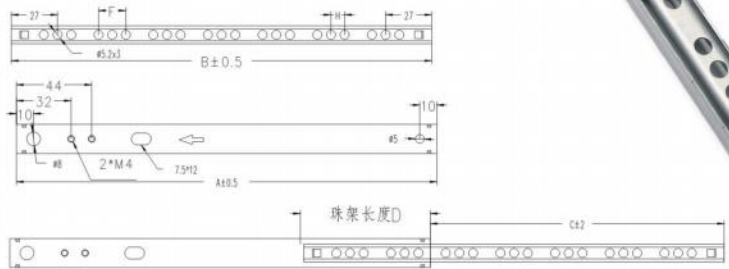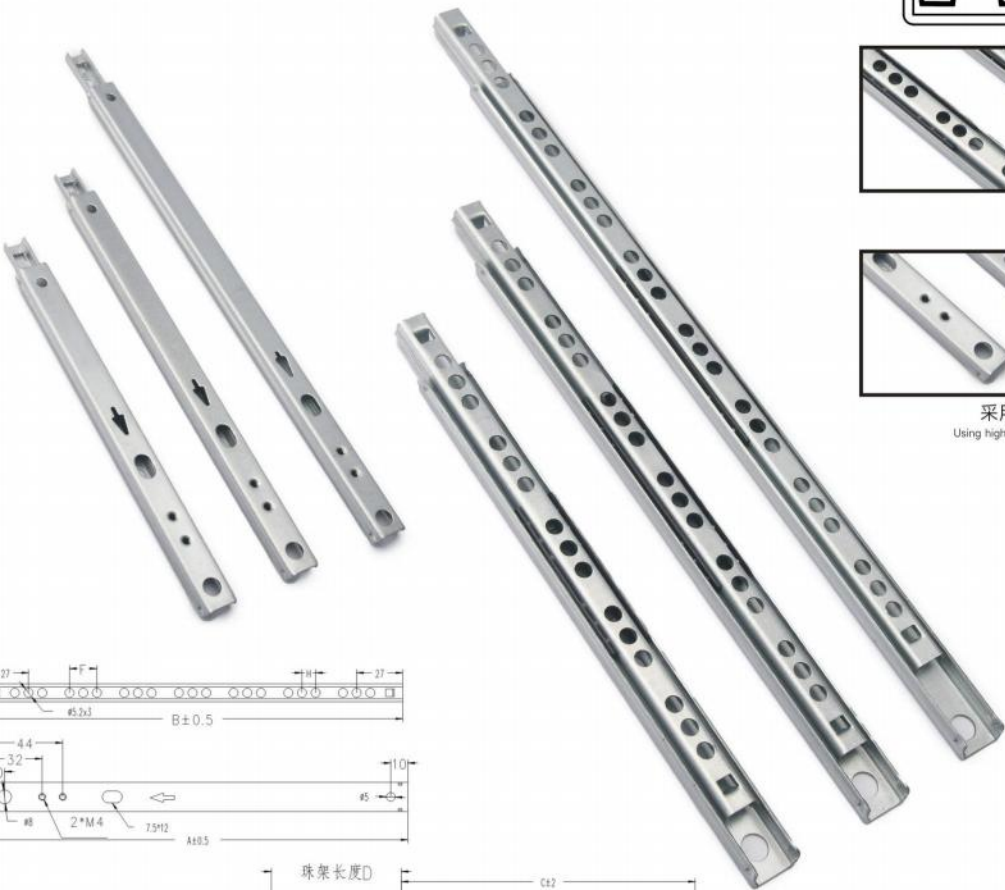

单位: mm

SIZE	A	B	C	D	E	F	G	H
8寸 8Inch	182	182	127	54	32/44	5		80/90
10寸 10Inch	214	214	139	74	32/44	6		80/90
12寸 12Inch	246	246	171	74	32/44	7		80/90
14寸 14Inch	278	278	203	74	32/44	8		80/90
16寸 16Inch	310	310	213	96	32/44	9		80/90
18寸 18Inch	342	342	245	96	32/44	10		80/90
20寸 20Inch	374	374	277	96	32/44	11		80/90
22寸 22Inch	406	406	309	96	32/44	12		80/90
24寸 24Inch	438	438	341	96	32/44	13		80/90


Slide Series

53mm/76mm Heavy duty Soft Close Slide / 53mm宽/76mm宽重型缓冲滑轨

Material/材质: Cold rolled steel 冷轧钢板
Width/宽度: 53mm/76mm
Thickness/材料厚度: 2.0x2.0x2.0mm
Capacity/承重: 80kg(450mm标准长度/as standard)

Cycle/开合: 50000times 5万次
Salt Spray Test/盐雾试验: 48H
Finish/表面处理: Zinc 镀锌
Installation/安装方法: side mount侧面安装



Thickness Range/材料厚度:
① 2.0mm
② 2.0mm
③ 2.0mm




带锁把手
Lock handle



可拆卸扣
Removable clasp

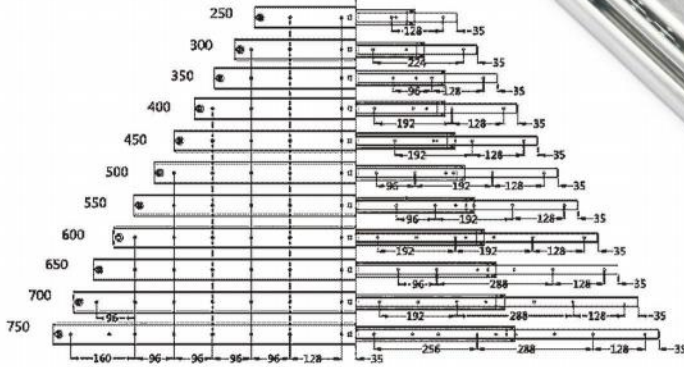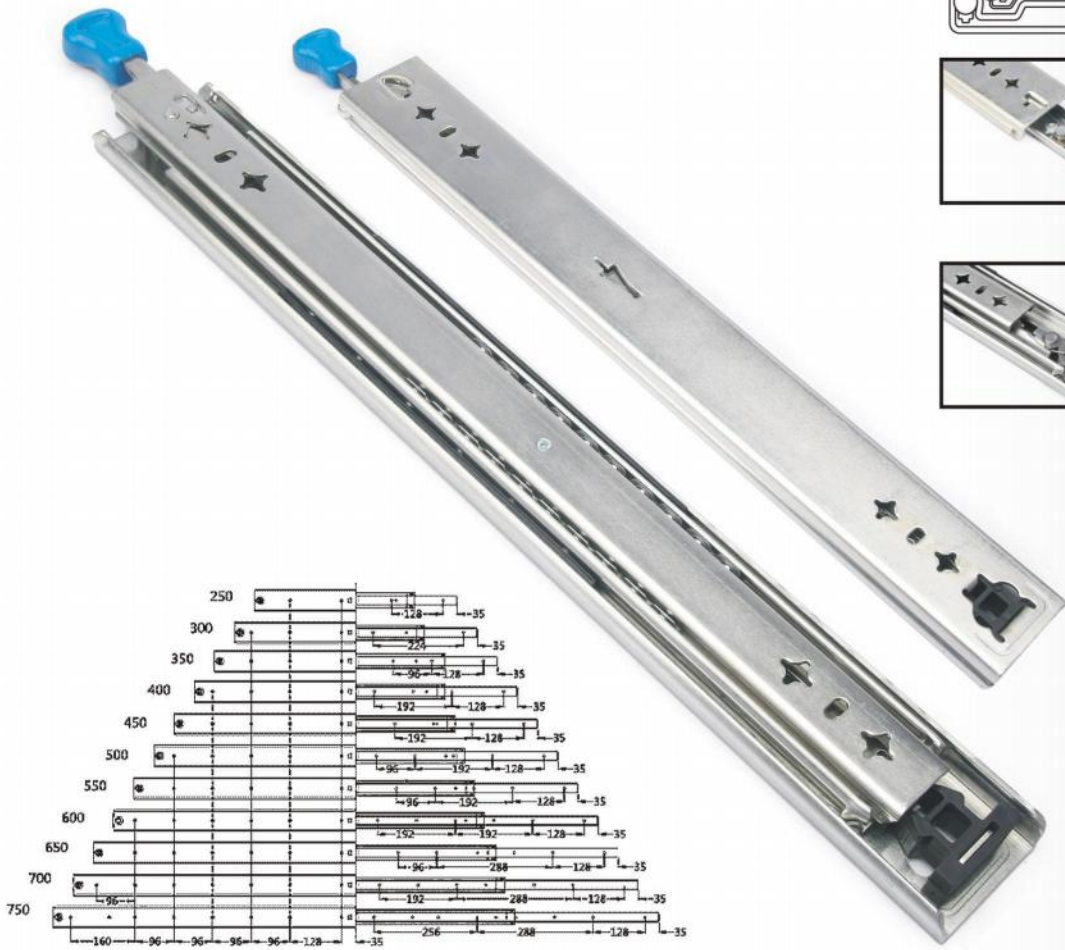

SIZE	系列长度 Series length	抽屉长度 Drawer length	最小柜深 Minimum cabinet depth
10寸 10Inch	250mm	250mm	254mm
12寸 12Inch	300mm	300mm	304mm
14寸 14Inch	350mm	350mm	354mm
16寸 16Inch	400mm	400mm	404mm
18寸 18Inch	450mm	450mm	454mm
20寸 20Inch	500mm	500mm	504mm
22寸 22Inch	550mm	550mm	554mm
24寸 24Inch	600mm	600mm	604mm
26寸 26Inch	650mm	650mm	654mm
28寸 28Inch	700mm	700mm	704mm
30寸 30Inch	750mm	750mm	754mm

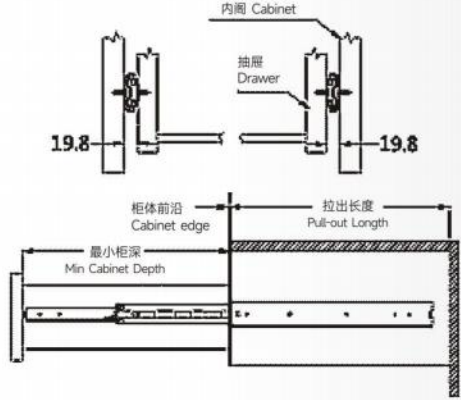

滑轨系列

2-Fold Soft Close Slim Tandem Box / 二节缓冲超薄骑马抽

Material/材质: Cold rolled steel 冷轧钢
Length/长度: 20inch(500mm)
Load capacity/额定负重: 35kg
Installation/安装方式: Under mount 底部安装

Cycle/开合: 50000times 5万次
Salt Spray Test/盐雾试验: 48H
Finish/表面处理: Grey/灰色




3D把手
3D handle



精密阻尼器
Precision damping pipe



镀锌板, 耐腐蚀
Galvanized, corrosion resistant

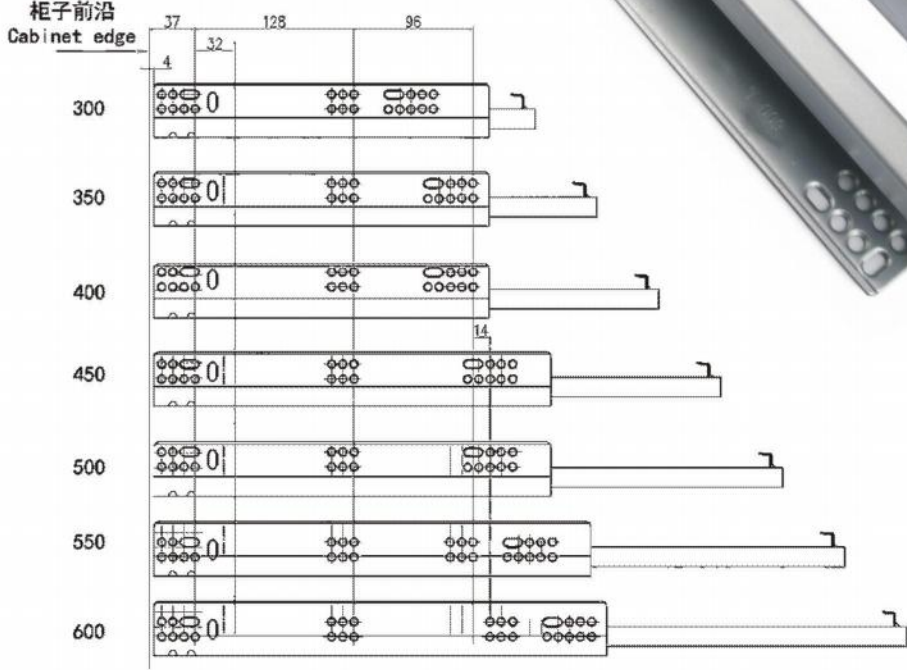

Slide Series

3-Fold Soft Close Slim Tandem Box / 三节缓冲超薄骑马抽

Material/材质: Cold rolled steel 冷轧钢
Length/长度: 20inch(500mm)
Load capacity/额定负重: 35kg
Installation/安装方式: Under mount 底部安装

Cycle/开合: 50000times 5万次
Salt Spray Test/盐雾试验: 48H
Finish/表面处理: Grey/灰色





3D把手
3D handle



精密阻尼器
Precision damping pipe



镀锌板, 耐腐蚀
Galvanized, corrosion resistant

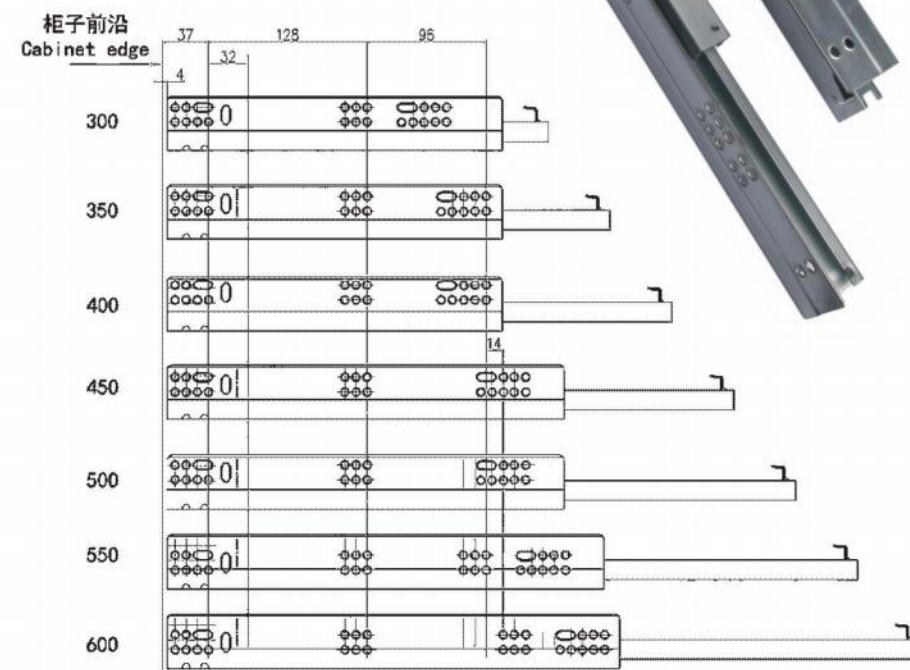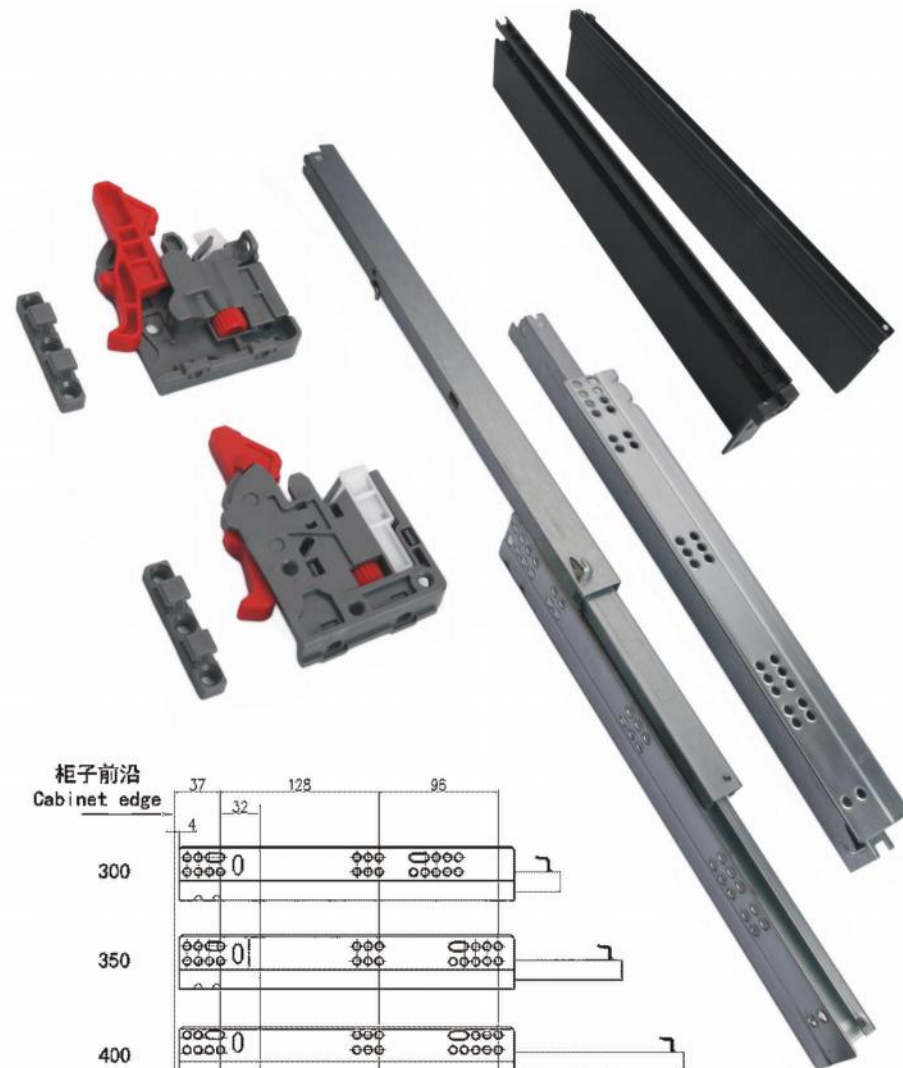

滑轨系列

Rebound device

反弹器系列



反弹器是一种用于家具柜门开关的小型五金配件。它主要通过内置的弹簧机构实现柜门的自动关闭，省去了传统铰链需要手动关闭的麻烦，同时也具有一定的美观效果。反弹器适用于各种定制家具柜门的开关，安装后开关柜门时不需要用到拉手。

Rebound device is a small hardware accessory used for opening and closing furniture cabinet doors. It mainly achieves automatic closing of cabinet doors through a built-in spring mechanism, eliminating the trouble of manual closing required by traditional hinges, while also having a certain aesthetic effect. The rebound device is suitable for opening and closing various customized furniture cabinet doors, and there is no need to use handles when opening and closing cabinet doors after installation.



Rebound device

反弹器系列


GC-01 细常规反弹器

Fine rebounder

材质: POM/ABS
Material: POM/ABS

表面处理: 深灰色/灰色/白色
Finish: Dark gray/Gray/White

弹力: 16N
Elastic force:16N

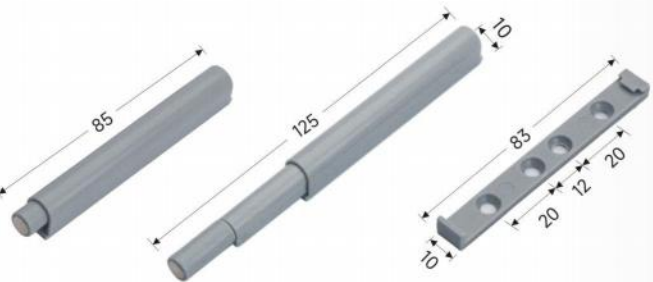


GC-02 粗常规反弹器

Coarse conventional rebounder

材质: POM/ABS
Material: POM/ABS

表面处理: 深灰色/灰色/白色
Finish: Dark gray/Gray/White

弹力: 23N
Elastic force:23N

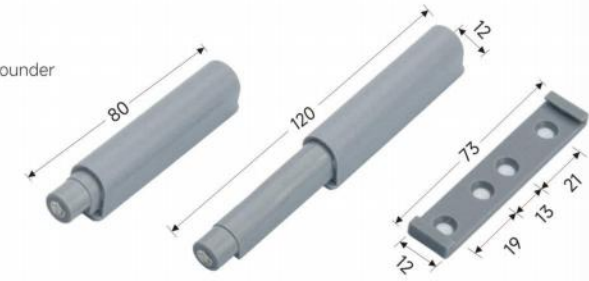


GC-03 细飞机反弹器

Fine aircraft rebounder

材质: POM/ABS
Material: POM/ABS

表面处理: 深灰色/灰色/白色
Finish: Dark gray/Gray/White

弹力: 16N
Elastic force:16N

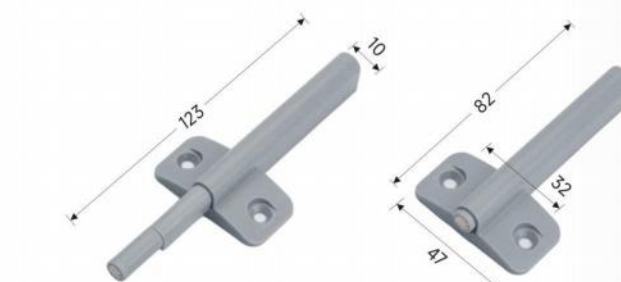

Rebound device

GC-11/11K 细常规反弹器 HDS rebound device

材质: POM/ABS
Material: POM/ABS

表面处理: 灰色/白色/黑色
Finish: Gray/White/Black

弹力: 32N
Elastic force: 32N



GC-12/12K BL反弹器 BL rebound device

材质: POM/ABS
Material: POM/ABS

表面处理: 灰色/白色/黑色
Finish: Gray/White/Black

弹力: 32N
Elastic force: 32N




GC-13 卡扣式反弹器 Buckle rebound device

材质: POM
Material: POM

表面处理: 灰色/白色/黑色
Finish: Gray/White/Black

弹力: 25N
Elastic force: 25N

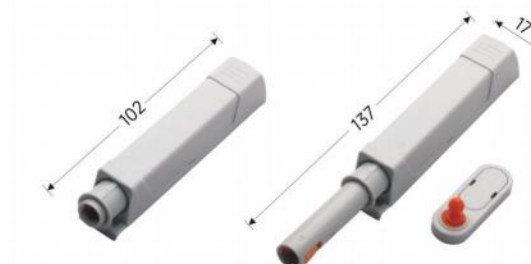

GC-14/14K 四方盒反弹器 Square box rebounder

材质: POM/ABS
Material: POM

表面处理: 灰色/白色
Finish: Gray/White

弹力: 30N
Elastic force: 30N



GC-15/15K 细子弹头反弹器 Fine bullet rebound device

材质: POM/ABS
Material: POM

表面处理: 灰色/白色
Finish: Gray/White

弹力: 20N
Elastic force: 20N




反弹器系列

GC-16/16K HDS飞机反弹器 HDS aircraft rebound device

材质: POM/ABS
Material: POM/ABS

表面处理: 灰色/白色
Finish: Gray/White

弹力: 20N
Elastic force: 20N

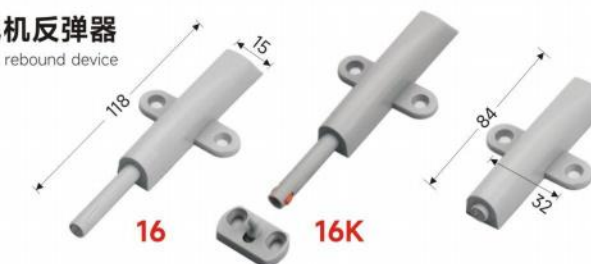


GC-17/17K BL飞机反弹器 BL aircraft rebound device

材质: POM/ABS
Material: POM/ABS

表面处理: 灰色/白色
Finish: Gray/White

弹力: 20N
Elastic force: 20N

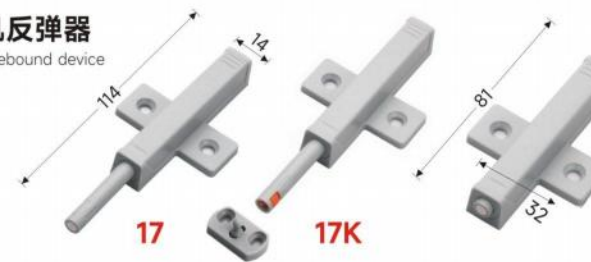


GC-18/18K BL飞机重型反弹器 BL aircraft heavy rebound device

材质: POM/ABS
Material: POM/ABS

表面处理: 灰色/白色
Finish: Gray/White

弹力: 50N
Elastic force: 50N

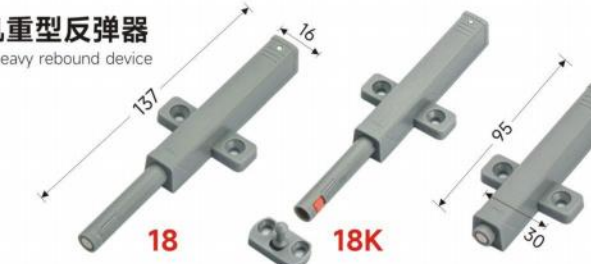

GC-19/19K BL重型反弹器 BL heavy-duty rebound device

材质: POM/ABS
Material: POM/ABS

表面处理: 灰色/白色
Finish: Gray/White

弹力: 50N
Elastic force: 50N



GC-20/20K BL飞机四孔反弹器 BL aircraft four hole rebound device

材质: POM/ABS
Material: POM/ABS

表面处理: 灰色/白色
Finish: Gray/White

弹力: 50N
Elastic force: 50N



Gas Spring

气动支撑系列



气撑也称为气弹簧或支撑杆，是一种用于橱柜五金配件的装置，具有支撑、缓冲、制动以及角度调节等功能。它是采用液压油封设计的，经久耐用，简直是厨房里的万能工具。


Air support, also known as gas spring or support rod, is a device used for cabinet hardware accessories, with functions such as support, buffering, braking, and angle adjustment. It is designed with hydraulic oil seals, which are durable and can be used as a universal tool in the kitchen.



Gas Spring

技术参数

SUPPORT BEARINGCAPACITY·支撑承载力说明图

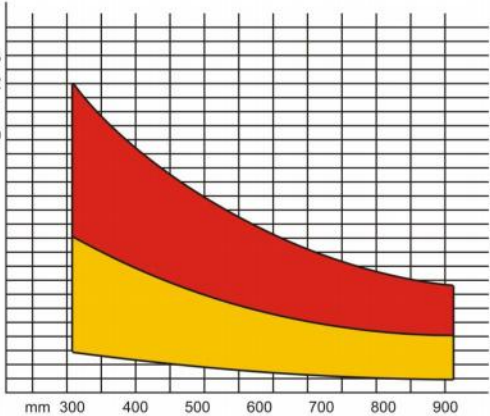


使用 1 只
Use 1piece

使用 2 只
Use 2pieces

管径: 15x1.00mm
Pipe diameter: 15x1.00mm

杆直径: Φ=6mm
Rod diameter: Φ=6mm

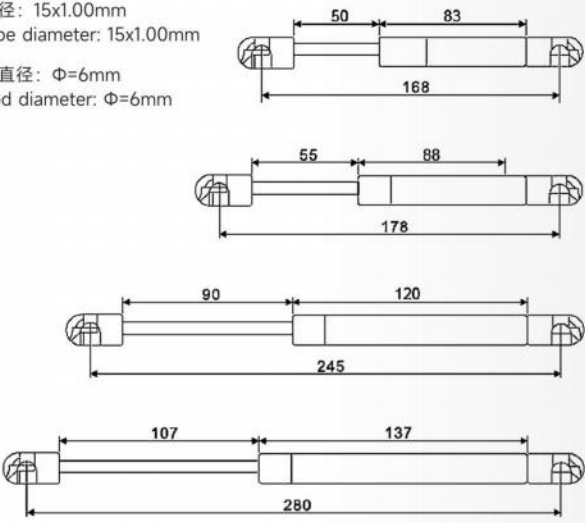

产品尺寸 Product size	管长 Pipe length(mm)	行程 Stroke(mm)	中心距 Center distance(mm)
(6")	83	50	168
(8")	88	55	178
(10")	120	90	245
(12")	137	107	280

LIFTING FORCE SELECTION REFERENCETABLE·举力选择参照表

门板重量 (kg)	开门角度 Open angle (mm)	80°				90°				100°			
		300	400	500	600	300	400	500	600	300	400	500	600
80N 100N 120N	≤ 2.6	≤ 2.2	≤ 1.7	≤ 1.3	≤ 2.4	≤ 2.0	≤ 1.6	≤ 1.2	≤ 2.1	≤ 1.7	≤ 1.4	≤ 1.0	
	≤ 3.3	≤ 2.7	≤ 2.2	≤ 1.6	≤ 3.0	≤ 2.5	≤ 2.0	≤ 1.5	≤ 2.6	≤ 2.2	≤ 1.7	≤ 1.3	
	≤ 4	≤ 3.3	≤ 2.6	≤ 2.0	≤ 3.6	≤ 3.0	≤ 2.4	≤ 1.8	≤ 3.2	≤ 2.6	≤ 2.1	≤ 1.6	

注: 请按此表格选择合适的型号及门的重量, 达到最佳效果。
Note: Please select the appropriate model and door weight according to this table to achieve the best results.

气动支撑系列



GC-01

主要材质: 铁, 塑料, 铜
Main material: iron, plastic, copper

颜色: 银色/黑色/白色
Color: Silver/Black/White

适用范围: 橱柜的木门/铝框门
Scope of application: Cabinet wooden doors/aluminum frame doors


处理工艺: 电镀, 喷漆
Treatment process: electroplating, spray painting

长度: 6" 8" 10" 12"
Length: 6" 8" 10" 12"


支撑力: 50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N
Force: 50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N

可根据客户需求定制: 气动向上支撑、液压向下支撑、任意角度支撑
Can be customized according to customer needs: pneumatic upward support, hydraulic downward support, support at any angle

安装示例:
Installation example:



上翻 Up Lifting



下翻 Down Lifting



配件清单
Accessories list:



GC-02

主要材质: 铁, 塑料, 铜
Main material: iron, plastic, copper

颜色: 银色/黑色/白色
Color: Silver/Black/White

适用范围: 橱柜的木门/铝框门
Scope of application: Cabinet wooden doors/aluminum frame doors


处理工艺: 电镀, 喷漆
Treatment process: electroplating, spray painting

长度: 6" 8" 10" 12"
Length: 6" 8" 10" 12"


支撑力: 50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N
Force: 50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N

可根据客户需求定制: 气动向上支撑、液压向下支撑、任意角度支撑
Can be customized according to customer needs: pneumatic upward support, hydraulic downward support, support at any angle

安装示例:
Installation example:



上翻 Up Lifting



下翻 Down Lifting



配件清单
Accessories list:



Gas Spring

GC-03

主要材质: 铁, 塑料, 铜
Main material: iron, plastic, copper

颜色: 银色/黑色/白色
Color: Silver/Black/White

适用范围: 橱柜的木门/铝框门
Scope of application: Cabinet wooden doors/aluminum frame doors


处理工艺: 电镀, 喷漆
Treatment process: electroplating, spray painting

长度: 6" 8" 10" 12"
Length: 6" 8" 10" 12"


支撑力: 50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N
Force: 50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N

可根据客户需求定制: 气动向上支撑、液压向下支撑、任意角度支撑
Can be customized according to customer needs: pneumatic upward support, hydraulic downward support, support at any angle

安装示例:
Installation example:



上翻 Up Lifting



下翻 Down Lifting



配件清单
Accessories list:



气动支撑系列

GC-05

主要材质: 铁, 塑料, 铜
Main material: iron, plastic, copper

颜色: 银色/黑色/白色
Color: Silver/Black/White

适用范围: 橱柜的木门/铝框门
Scope of application: Cabinet wooden doors/aluminum frame doors


处理工艺: 电镀, 喷漆
Treatment process: electroplating, spray painting

长度: 6" 8" 10" 12"
Length: 6" 8" 10" 12"


支撑力: 50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N
Force: 50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N

可根据客户需求定制: 气动向上支撑、液压向下支撑、任意角度支撑
Can be customized according to customer needs: pneumatic upward support, hydraulic downward support, support at any angle

安装示例:
Installation example:



上翻 Up Lifting



下翻 Down Lifting



配件清单
Accessories list:



GC-04

主要材质: 铁, 塑料, 铜
Main material: iron, plastic, copper

颜色: 银色/黑色/白色
Color: Silver/Black/White

适用范围: 橱柜的木门/铝框门
Scope of application: Cabinet wooden doors/aluminum frame doors


处理工艺: 电镀, 喷漆
Treatment process: electroplating, spray painting

长度: 6" 8" 10" 12"
Length: 6" 8" 10" 12"


支撑力: 50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N
Force: 50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N

可根据客户需求定制: 气动向上支撑、液压向下支撑、任意角度支撑
Can be customized according to customer needs: pneumatic upward support, hydraulic downward support, support at any angle

安装示例:
Installation example:



上翻 Up Lifting



下翻 Down Lifting



配件清单
Accessories list:



GC-06

主要材质: 铁, 塑料, 铜
Main material: iron, plastic, copper

颜色: 银色/黑色/白色
Color: Silver/Black/White

适用范围: 橱柜的木门/铝框门
Scope of application: Cabinet wooden doors/aluminum frame doors


处理工艺: 电镀, 喷漆
Treatment process: electroplating, spray painting

长度: 6" 8" 10" 12"
Length: 6" 8" 10" 12"


支撑力: 50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N
Force: 50N, 60N, 80N, 100N, 120N, 150N, 180N, 200N, 250N

可根据客户需求定制: 气动向上支撑、液压向下支撑、任意角度支撑
Can be customized according to customer needs: pneumatic upward support, hydraulic downward support, support at any angle

安装示例:
Installation example:



上翻 Up Lifting



下翻 Down Lifting



配件清单
Accessories list:

