


SUNROVER

Wall Mounted

LIFEPO4 Battery

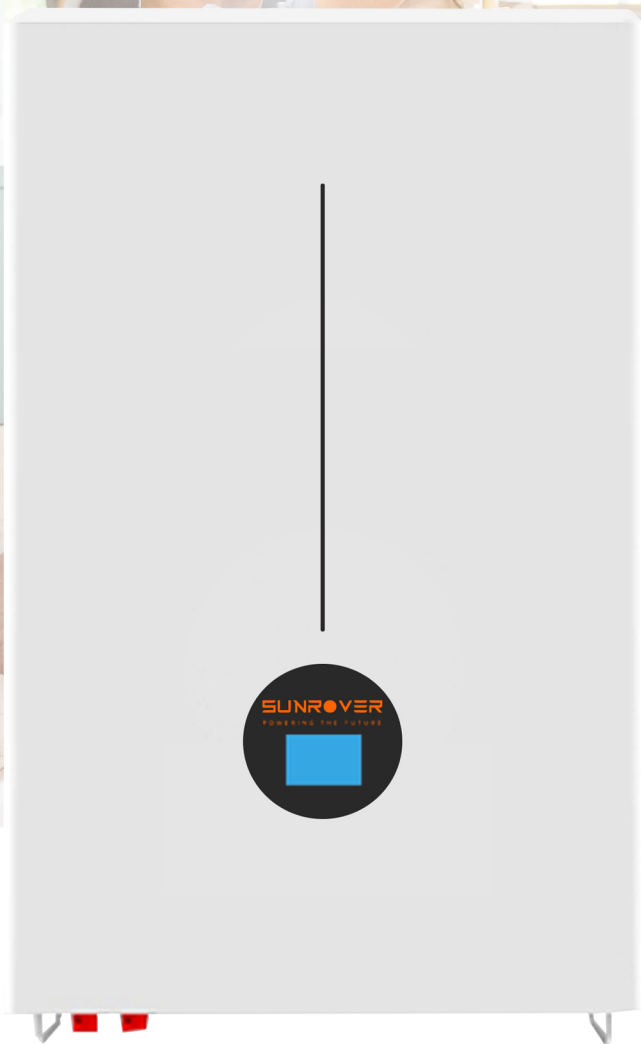

HZW-100-16S

Measured Capacity > Nominal Capacity+5%



High Safety
Lifepo4 Battery



10 years Warranty



Multi-level
of Protection



High Energy Density



Support RS485 and
CAN Communication



Intelligent
Built-in BMS



info@sunroverpv.com



0086 183-2617-3291



www.sunroverpv.com

HZW-100-16S

Model	HZW-100-16S
Product	51.2V100AH
Nominal Voltage (V)	51.2V
Nominal Capacity (AH)	100AH
Nominal Capacity (WH)	5120WH
Usable Capacity (WH)	4608WH
Discharge Voltage (V)	44.8V
Charge Voltage (V)	57.6V
Recommend Charge/Discharge Current (A)	50A
Max.Charge/Discharge Current (A)	100 (3S)
Communication	RS485/CAN/Bluetooth (Optional)
Operation Temperature	0-40°C
Storage Temperature	-20-70°C
Humidity	15%-80%
Dimension	440x453x206mm
Weight	52.0kg
Certification	CE/IEC/UN38.3/MSDS
Design Life	10 years+
Cycle Life	≥4000@25°C
Electrical Design Redundancy	> 20%

