

RELIABLE POWER SOLUTIONS

PRODUCT CATALOG

ERAYAK
POWER SOLUTION

20 YEARS⁺
PRODUCTION EXPERIENCE



ERAYAK
POWER SOLUTION

SILENT
INVERTER GENERATOR



FOR RV



FOR HOME



FOR JOBSITE



ERAYAK 6800PT

3-WAY START | SMART DIGITAL DISPLAY
ULTIMATE MOBILITY | TRI-FUEL



OPEN-FRAME
INVERTER GENERATOR



FOR HOME



FOR JOBSITE




ERAYAK 15000iD

DUAL-CYLINDER PERFORMANCE

TRI-FUEL | SMART DISPLAY | MOBILITY WHEEL KIT

POWER YOU NEED. SERVICE YOU TRUST.

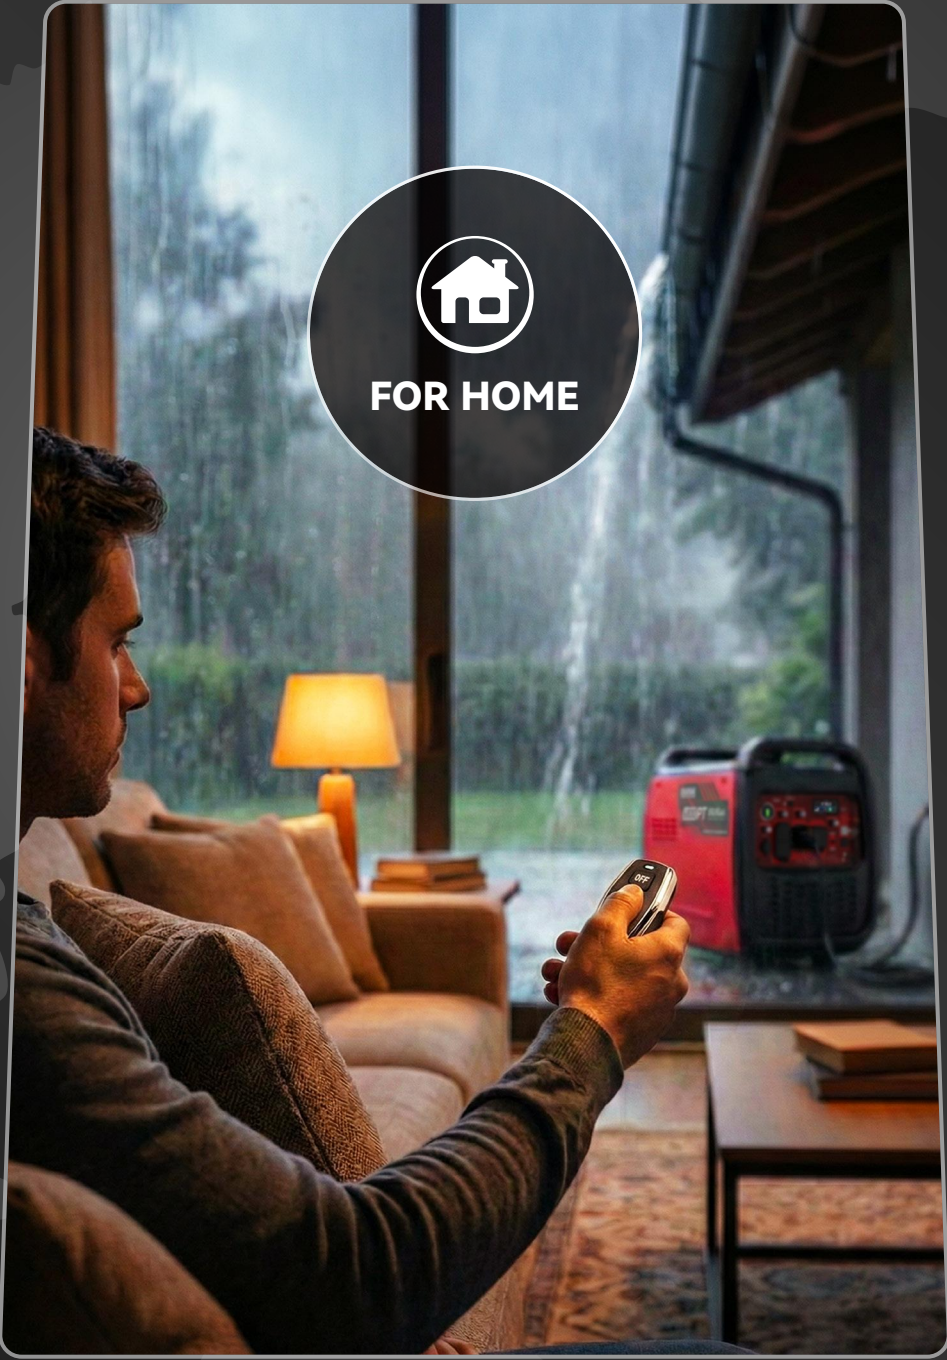

ERAYAK
POWER SOLUTION

INVERTER
GENERATOR

POWER TO EVERY CORNER ⚡

For more information, please visit: erayakpower.com

CUSTOMER

FAVORITE



4500PDE



4500P



2400P



4500PDM

ERAYAK
POWER SOLUTION

SILENT
INVERTER GENERATOR

POWER TO EVERY CORNER 

For more information, please visit: erayakpower.com

Silent Inverter Generator



1 Clean and Stable Power

Produces consistent and high-quality electrical output with low THD, safe for powering sensitive electronic devices, more starting capacity for tools and other motor-driven equipment.

2 Fuel Efficiency

Highly fuel-efficient design, adjust engine speed based on power demand. When the load is lighter, it runs at a lower speed and consumes less fuel.

3 Quieter Operation

Noise level is significantly lower compared to traditional generators, ensuring a more peaceful and enjoyable environment, more suitable for any situation where noise reduction is important.

4 Compact and Lightweight

Portable design, more compact and lightweight compared to traditional generators, makes them easy to transport, store, and carry. This is especially beneficial for those who need power on the go.

5 Parallel Capability

With the option to connect two or more generators in parallel, this allows you to combine the power output of two units, effectively doubling the available power, when you have higher power demands.



EYG 1000iN



 Model EYG1000iN	Frequency(Hz) 50Hz , 60Hz	 Displacement(CC) 53.5	Power/Speed (kW/r/min) 1.15/500
 Rated Power 1000W	Max Power 1050W	 Fuel Unleaded Gasoline	Oil Capacity(L) 0.15
 Rated Current (A) 13.9A (@ AC 220V ~ 240V) 26.7A (@AC 110V ~ 120V)		 Fuel Tank Capacity(L) 2	Continuous Working Hours 4h (@ Full Load)
 Motor Type Magnet Motor, Single Phase		 Starting System Recoil	Operating Noise Level(7m) dB 57-59
 Rated Voltage (V) 220V, 230V, 240V, 110V, 120V		 Machine Dimension(L*W*H) 430*274*405mm	
 DC Output 12V5A or (USB 5V DC2.1A)		 Engine Model LY144F	N.W. 12.5KG
 Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine			

OPTIONAL FEATURES



CO Alert
System



Parallel Power
Link

EYG 4500P



 Model EYG4000iN	Frequency(Hz) 50Hz , 60Hz	 Displacement(CC) 148	Power/Speed (kW/r/min) 4.0/4600
 Rated Power 3500W	Max Power 4500W	 Fuel Unleaded Gasoline	Oil Capacity(L) 0.45
 Rated Current (A) 13.9A (@ AC 220V ~ 240V) 26.7A (@AC 110V ~ 120V)		 Fuel Tank Capacity(L) 8	Continuous Working Hours 5h (@ Full Load)
 Motor Type Magnet Motor, Single Phase		 Starting System Recoil	Operating Noise Level(7m) dB 58-60
 Rated Voltage (V) 220V, 230V, 240V, 110V, 120V		 Machine Dimension(L*W*H) 508*310*490mm	
 DC Output USB 5V 2.1A, DC 5V 1A		 Engine Model LY165F	N.W. 25KG
 Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine			

OPTIONAL FEATURES



Dual Voltage




Key & Button
Start



Remote Key
Start



Parallel Power
Link



Mobility Kit

EYG 2400P

 Model EYG2000iN	Frequency(Hz) 50Hz , 60Hz	 Displacement(CC) 79.8	Power/Speed (kW/r/min) 2.2/5000
 Rated Power 1800W	Max Power 2400W	 Fuel Unleaded Gasoline	Oil Capacity(L) 0.35
 Rated Current (A) 7.8A (@ AC 220V ~ 240V) 15A (@AC 110V ~ 120V)		 Fuel Tank Capacity(L) 3.6	Continuous Working Hours 4h (@ Full Load)
 Motor Type Magnet Motor, Single Phase		 Starting System Recoil,Electrical,Remote	Operating Noise Level(7m) dB 58-60
 Rated Voltage (V) 220V, 230V, 240V, 110V, 120V		 Machine Dimension(L*W*H) 478*298*460mm	
 DC Output 12V5A or (USB 5V DC2.1A)		 Engine Model LY148F	N.W. 19.5KG
 Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine			



OPTIONAL FEATURES



Dual Voltage



Parallel Power
Link




Mobility Kit

EYG 4500PDE

 Model EYG4000iN	Frequency(Hz) 50Hz , 60Hz	 Displacement(CC) 149	Power/Speed (kW/r/min) 4.0/4600
 Rated Power 3500W	Max Power 4500W	 Fuel Unleaded Gasoline	Oil Capacity(L) 0.45
 Rated Current (A) 13.9A (@ AC 220V ~ 240V) 26.7A (@AC 110V ~ 120V)		 Fuel Tank Capacity(L) 8	Continuous Working Hours 5h (@ Full Load)
 Motor Type Magnet Motor, Single Phase		 Starting System Recoil	Operating Noise Level(7m) dB 58-60
 Rated Voltage (V) 220V, 230V, 240V, 110V, 120V		 Machine Dimension(L*W*H) 508*310*490mm	
 DC Output 12V5A or (USB 5V DC2.1A)		 Engine Model LY165F	N.W. 25KG
 Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine			



OPTIONAL FEATURES



Dual Fuel
System



Dual Voltage



Key & Button
Start



Remote Key
Start



Parallel Power
Link



Mobility Kit

EYG 4500PDM



 Model EYG4000iN	Frequency(Hz) 50Hz , 60Hz	 Displacement(CC) 149	Power/Speed (kW/r/min) 4.0/4600
 Rated Power 3500W	Max Power 4500W	 Fuel Unleaded Gasoline	Oil Capacity(L) 0.45
 Rated Current (A) 13.9A (@ AC 220V ~ 240V) 26.7A (@AC 110V ~ 120V)		 Fuel Tank Capacity(L) 8	Continuous Working Hours 5h (@ Full Load)
 Motor Type Magnet Motor, Single Phase		 Starting System Recoil	Operating Noise Level(7m) dB 58-60
 Rated Voltage (V) 220V, 230V, 240V, 110V, 120V		 Machine Dimension(L*W*H) 508*310*490mm	
 DC Output 12V5A or (USB 5V DC2.1A)		 Engine Model LY165F	N.W. 25KG
 Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine			


OPTIONAL FEATURES



Dual Fuel System



Dual Voltage



Key & Button Start



Remote Key Start



Parallel Power Link




Mobility Kit

EYG 6800PD



 Model EYG6250iE	Frequency(Hz) 50Hz , 60Hz	 Displacement(CC) 149	
 Rated Power 5000W	Max Power 6800W	 Fuel Unleaded Gasoline	Oil Capacity(L) 0.65
 Rated Current (A) 20.8A (@ AC 220V ~ 240V) 41.6A (@AC 110V ~ 120V)		 Fuel Tank Capacity(L) 11	Continuous Working Hours 6h (@ Full Load)
 Motor Type Magnet Motor, Single Phase		 Starting System Recoil/E-start	Operating Noise Level(7m) dB 69
 Rated Voltage (V) 120-240		 Machine Dimension(L*W*H) 605*420*545mm	
 DC Output 12V/8.3A		 Engine Model LY175F	N.W. 41KG
 Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine			

OPTIONAL FEATURES



Digital Screen



Dual Fuel System



Dual Voltage




Key & Button Start



Remote Key Start



Parallel Power Link



Mobility Kit

EYG 6500iN

 Model EYG6500iN	Frequency(Hz) 50Hz , 60Hz	 Displacement(CC) 224	Power/Speed (kW/r/min) 6.2/4600
 Rated Power 5000W	Max Power 5500W	 Fuel Unleaded Gasoline	Oil Capacity(L) 0.6
 Rated Current (A) 22.1A (@ AC 220V ~ 240V) 42.5A (@AC 110V ~ 120V)		 Fuel Tank Capacity(L) 11	Continuous Working Hours 4h (@ Full Load)
 Motor Type Magnet Motor, Single Phase		 Starting System Recoil,Electrical,Remote	Operating Noise Level(7m) dB 69
 Rated Voltage (V) 220V, 230V, 240V, 110V, 120V		 Machine Dimension(L*W*H) 610*407*630mm	
 DC Output 12V5A or (USB 5V DC2.1A)		 Engine Model LY170F	N.W. 41.5KG
 Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine			



OPTIONAL FEATURES



Dual Fuel System



Dual Voltage



Parallel Power Link

EYG 6800PT

 Model EYG6250iE	Frequency(Hz) 50Hz , 60Hz	 Displacement(CC) 149	
 Rated Power 5000W	Max Power 6800W	 Fuel Unleaded Gasoline	Oil Capacity(L) 0.65
 Rated Current (A) 20.8A (@ AC 220V ~ 240V) 41.6A (@AC 110V ~ 120V)		 Fuel Tank Capacity(L) 11	Continuous Working Hours 6h (@ Full Load)
 Motor Type Magnet Motor, Single Phase		 Starting System Recoil/E-start	Operating Noise Level(7m) dB 69
 Rated Voltage (V) 120-240		 Machine Dimension(L*W*H) 605*420*545mm	
 DC Output 12V/8.3A		 Engine Model LY175F	N.W. 41KG
 Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine			



OPTIONAL FEATURES



Digital Screen



Tri Fuel System



Dual Voltage




Key & Button Start



Remote Key Start



Parallel Power Link



Mobility Kit

EYG 8500iE



 Model EYG8500iE	Frequency(Hz) 50Hz , 60Hz	 Displacement(CC) 420	Power/Speed (kW/r/min) 9.0/3600
 Rated Power 6800W	Max Power 7500W	 Fuel Unleaded Gasoline	Oil Capacity(L) 1.1
 Rated Current (A) 29.5A (@ AC 220V ~ 240V) 56.7A (@AC 110V ~ 120V)		 Fuel Tank Capacity(L) 20	Continuous Working Hours 6h (@ Full Load)
 Motor Type Magnet Motor, Single Phase		 Starting System Recoil	Operating Noise Level(7m) dB 64-66
 Rated Voltage (V) 220V, 230V, 240V, 110V, 120V		 Machine Dimension(L*W*H) 870*560*550mm	
 DC Output USB 5V 2.1A, DC 5V 1A		 Engine Model LY190F	N.W. 93KG
 Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine			

OPTIONAL FEATURES



Dual Fuel System



CO Alert System



Parallel Power Link

RELIABLE POWER FOR HOUSEHOLD & YARD WORK

POWERFUL ENOUGH FOR ALL YOUR EQUIPMENT



HOME & YARD
POWER SOLUTION

Open-Frame Inverter Generator



1 Clean and Stable Power

Produces consistent and high-quality electrical output with low THD, safe for powering sensitive electronic devices, more starting capacity for tools and other motor-driven equipment.

2 Fuel Efficiency

Highly fuel-efficient design, adjust engine speed based on power demand. When the load is lighter, it runs at a lower speed and consumes less fuel.

3 Quieter Operation

Noise level is significantly lower compared to traditional generators, ensuring a more peaceful and enjoyable environment, more suitable for any situation where noise reduction is important.

4 Compact and Lightweight

Portable design, more compact and lightweight compared to traditional generators, makes them easy to transport, store, and carry. This is especially beneficial for those who need power on the go.

5 Parallel Capability

With the option to connect two or more generators in parallel, this allows you to combine the power output of two units, effectively doubling the available power, when you have higher power demands.



EYG 1000iB



	Model EYG1000iB	Frequency(Hz) 50Hz , 60Hz		Displacement(CC) 56	Power/Speed (kW/r/min) 1.3/4800
	Rated Power 1000W	Max Power 1200W		Fuel Unleaded Gasoline	Oil Capacity(L) 0.28
	Rated Current (A) 4.3A (@ AC 220V ~ 240V) 8.3A (@AC 110V ~ 120V)			Fuel Tank Capacity(L) 2.8	Continuous Working Hours 3.5h(@ Full Load)
	Motor Type Magnet Motor, Single Phase			Starting System Recoil	Operating Noise Level(7m) dB 58
	Rated Voltage (V) 220V, 230V, 240V, 110V, 120V			Machine Dimension(L*W*H) 340*305*320mm	
	DC Output USB 5V 2.1A, DC 5V 1A			Engine Model LY145F	N.W. 10KG
	Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine				


OPTIONAL FEATURES

EYG 2000i

	Model EYG2800i	Frequency(Hz) 50Hz , 60Hz		Displacement(CC) 212	Power/Speed (kW/r/min) 4.5/3600
	Rated Power 2500W	Max Power 2800W		Fuel Unleaded Gasoline	Oil Capacity(L) 0.6
	Rated Current (A) 10.9A (@ AC 220V ~ 240V) 22.7A (@AC 110V ~ 120V)			Fuel Tank Capacity(L) 12	Continuous Working Hours 9h (@ Full Load)
	Motor Type Magnet Motor, Single Phase			Starting System Recoil	Operating Noise Level(7m) dB 59-61
	Rated Voltage (V) 220V, 230V, 240V, 110V, 120V			Machine Dimension(L*W*H) 480*420*490mm	
	DC Output 12V5A or (USB 5V DC2.1A)			Engine Model LY170F	N.W. 29KG
	Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine				



OPTIONAL FEATURES



EYG 4000i



	Model EYG4000i	Frequency(Hz) 50Hz , 60Hz		Displacement(CC) 212	Power/Speed (kW/r/min) 4.6/3600
	Rated Power 3500W	Max Power 3800W		Fuel Unleaded Gasoline	Oil Capacity(L) 0.6
	Rated Current (A) 15.2A (@ AC 220V ~ 240V) 29.2A (@AC 110V ~ 120V)			Fuel Tank Capacity(L) 12	Continuous Working Hours 5h (@ Full Load)
	Motor Type Magnet Motor, Single Phase			Starting System Recoil	Operating Noise Level(7m) dB 60-63
	Rated Voltage (V) 220V, 230V, 240V, 110V, 120V			Machine Dimension(L*W*H) 480*420*490mm	
	DC Output 12V5A or (USB 5V DC2.1A)			Engine Model LY170F	N.W. 30KG
	Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine				

OPTIONAL FEATURES




EYG 7500i

	Model EYG7500i	Frequency(Hz) 50Hz , 60Hz		Displacement(CC) 236	Power/Speed (kW/r/min) 6.65/4600
	Rated Power 5000W	Max Power 5500W		Fuel Unleaded Gasoline	Oil Capacity(L) 0.6
	Rated Current (A) 21.7A (@ AC 220V ~ 240V) 43.5A (@AC 110V ~ 120V)			Fuel Tank Capacity(L) 18	Continuous Working Hours 8h (@ Full Load)
	Motor Type Magnet Motor, Single Phase			Starting System Recoil,Electrical,Remote	Operating Noise Level(7m) dB 61-64
	Rated Voltage (V) 220V, 230V, 240V, 110V, 120V			Machine Dimension(L*W*H) 500*480*490mm	
	DC Output 12V5A or (USB 5V DC2.1A)			Engine Model LY172F	N.W. 32KG
	Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine				



OPTIONAL FEATURES





Model		EYG6500iD	EYG7500iD	EYG9000iD	EYG10000iD	EYG11500iD	EYG12500iD	EYG15000iD
Unit	Type	Single-phase/Dual-voltage		Single/Three-phase Equal Power				
	Rated Voltage (V)	120/230/(120/240)		120V/230/400				
	Rated Frequency (Hz)	50/60						
	Rated Current (A)	41.67/21.74/20.83	50/26.1/25	30.43/10.1	34.78/11.55	39.13/13.0	47.83/15.88	56.52/18.77
	Rated Power (kW)	5	6	7	8	9	11	13
	Maximum Power (kW)	5.5	5.5	7.5	8.5	9.5	12	14
	Power Factor	1.0	1.0	1.0/0.8	1.0/0.8	1.0/0.8	1.0/0.8	1.0/0.8
	Waveform Distortion Rate THD (%)	≤3%						
	Voltage Regulation Method	Inverter Regulation						
	DC Output (DC)	12V/8.3A						
	Fuel Tank Capacity (L)	18		25			40	50
	Running Time (100% Load) h	5.6	4.65	5.65	4.9	4.45	5.25	6.45
	Noise (LpAm(dB/20Pa)	75.8 4m 75%	76.2 4m 75%	76.5 4m 75%	76.7 4m 75%	76.9 4m 75%	75.9 4m 75%	76.1 4m 75%
Engine	Gasoline Engine Model	LY175iD	LY180iD	LY190iD	LY192iD		LY196iD	LY2V80D
	Compression Ratio	9:1		8.5:1	8.8:1			8.5:1
	Displacement (ml)	274	321.7	420	459		550	744
	Maximum Output Power (kW) / (r/min)	6.3/3600	7.8/3600	8.8/3600	11.3/3600	12/3800	13.5/3800	18/3600
	Bore × Stroke (mm)	75×62	80×64	90×66	92×69	92×69	96×76	80×74
	Oil Capacity (L)	0.7	0.65	1.1	1.1	1.1	1.1	1.6
	Start Method	Manual/ Electric Start						Electric Start
	Speed Regulation Method	Electronic Speed Regulation						
	ECO Energy-saving Mode Speed r/min	2800—3600		2800—3600		3000—3800		2800—3600
	Non Energy-saving Mode Speed r/min	3400—3600		3400—3600		3500—3800		3300—3600
Standard Configuration	Electric Start	6-in-1 Combination Switch		5-in-1 Combination Switch			6-in-1 Combination Switch	5-in-1 Combination Switch
	Voltmeter	LCD Digital Display						
	Battery Type	Lithium Battery 1.6Ah						36Ah Maintenance-free Lead-acid Battery
Optional Configuration	Wheels (Inch)	8 inch (Plastic/Foam)						10 inch Foam
	Dual-fuel	Optional						
	Tri-fuel							
	Remote Start							
Motor Dimensions		φ163×50		φ179×53	φ179×60	φ179×60	φ199×60	φ199×48
Overall Dimensions		610×530×510		650×542×560			700×550×625	765×625×840
Packing Dimensions (Five-layer Double Corrugated Carton)		625×545×555		665×557×605			715×565×650	780×640×865
40HQ Container Loading Quantity (Units) Without Pallet		316	316	292			260	162
Net Weight (kg)		45		66.5	69		75	140

Portable Gasoline Generator



1 Clean and Stable Power

Produces consistent and high-quality electrical output with low THD, safe for powering sensitive electronic devices, more starting capacity for tools and other motor-driven equipment.

2 Fuel Efficiency

Highly fuel-efficient design, adjust engine speed based on power demand. When the load is lighter, it runs at a lower speed and consumes less fuel.

3 Quieter Operation

Noise level is significantly lower compared to traditional generators, ensuring a more peaceful and enjoyable environment, more suitable for any situation where noise reduction is important.

4 Compact and Lightweight

Portable design, more compact and lightweight compared to traditional generators, makes them easy to transport, store, and carry. This is especially beneficial for those who need power on the go.

5 Parallel Capability

With the option to connect two or more generators in parallel, this allows you to combine the power output of two units, effectively doubling the available power, when you have higher power demands.



EYG 2600G



 Model EYG2600G	Frequency(Hz) 50Hz , 60Hz	 Displacement(CC) 212	Power/Speed (kW/r/min) 4.6/3600
 Rated Power 2100W	Max Power 2300W	 Fuel Unleaded Gasoline	Oil Capacity(L) 0.6
 Rated Current (A) 9.1A (@ AC 220V ~ 240V) 18.3A (@AC 110V ~ 120V)		 Fuel Tank Capacity(L) 15	Continuous Working Hours 10.6h (@ Full Load)
 Motor Type Magnet Motor, Single Phase		 Starting System Recoil	Operating Noise Level(7m) dB 65
 Rated Voltage (V) 220V, 230V, 240V, 110V, 120V		 Machine Dimension(L*W*H) 590*430*430mm	
 DC Output 12V5A 60W		 Engine Model LY170F	N.W. 38KG
 Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine			

OPTIONAL FEATURES




EYG 3500G

 Model EYG3500G	Frequency(Hz) 50Hz , 60Hz	 Displacement(CC) 212	Power/Speed (kW/r/min) 4.6/3600
 Rated Power 2600W	Max Power 2800W	 Fuel Unleaded Gasoline	Oil Capacity(L) 0.6
 Rated Current (A) 11.3A (@ AC 220V ~ 240V) 22.6A (@AC 110V ~ 120V)		 Fuel Tank Capacity(L) 15	Continuous Working Hours 9h (@ Full Load)
 Motor Type Magnet Motor, Single Phase		 Starting System Recoil	Operating Noise Level(7m) dB 67
 Rated Voltage (V) 220V, 230V, 240V, 110V, 120V		 Machine Dimension(L*W*H) 590*430*430mm	
 DC Output 12V5A 60W		 Engine Model LY170F	N.W. 40KG
 Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine			



OPTIONAL FEATURES

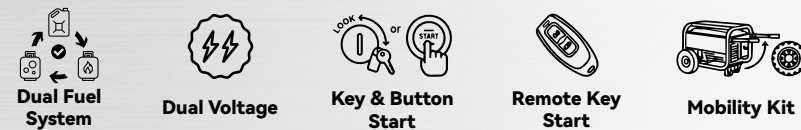

EYG 3900GA



 Model EYG3900GA	Frequency(Hz) 50Hz , 60Hz	 Displacement(CC) 223	Power/Speed (kW/r/min) 4.3/3000
 Rated Power 3200W	Max Power 3500W	 Fuel Unleaded Gasoline	Oil Capacity(L) 0.6
 Rated Current (A) 13.9A (@ AC 220V ~ 240V) 27.8A (@AC 110V ~ 120V)		 Fuel Tank Capacity(L) 13.5	Continuous Working Hours 8h (@ Full Load)
 Motor Type Magnet Motor, Single Phase		 Starting System Recoil	Operating Noise Level(7m) dB 67
 Rated Voltage (V) 220V, 230V, 240V, 110V, 120V		 Machine Dimension(L*W*H) 710*530*490mm	
 DC Output DC 12V/8.3A		 Engine Model LY170F2	N.W. 46KG
 Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine			

OPTIONAL FEATURES



EYG 6500GE

 Model EYG6500GE	Frequency(Hz) 50Hz , 60Hz	 Displacement(CC) 420	Power/Speed (kW/r/min) 9/3600
 Rated Power 5000W	Max Power 5500W	 Fuel Unleaded Gasoline	Oil Capacity(L) 1.1
 Rated Current (A) 21.7A (@ AC 220V ~ 240V) 43.5A (@AC 110V ~ 120V)		 Fuel Tank Capacity(L) 25	Continuous Working Hours 10h (@ Full Load)
 Motor Type Magnet Motor, Single Phase		 Starting System Recoil,Electrical,Remote	Operating Noise Level(7m) dB 75
 Rated Voltage (V) 220V, 230V, 240V, 110V, 120V		 Machine Dimension(L*W*H) 715*630*645mm	
 DC Output 12V5A 60W		 Engine Model LY190F 1	N.W. 81KG
 Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine			



OPTIONAL FEATURES




EYG 8500GE



 Model EYG8500GE	Frequency(Hz) 50Hz , 60Hz	 Displacement(CC) 439	Power/Speed (kW/r/min) 9.6/3600
 Rated Power 6000W	Max Power 6500W	 Fuel Unleaded Gasoline	Oil Capacity(L) 1.1
 Rated Current (A) 26A (@ AC 220V ~ 240V) 52.2A (@AC 110V ~ 120V)		 Fuel Tank Capacity(L) 25	Continuous Working Hours 9h (@ Full Load)
 Motor Type Magnet Motor, Single Phase		 Starting System Recoil	Operating Noise Level(7m) dB 76
 Rated Voltage (V) 220V, 230V, 240V, 110V, 120V		 Machine Dimension(L*W*H) 715*630*645mm	
 DC Output 12V5A 60W		 Engine Model LY192F 1	N.W. 83.6KG
 Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine			

OPTIONAL FEATURES



Dual Fuel
System



Dual Voltage



Key & Button
Start



Remote Key
Start



Mobility Kit

EYG 9500GE



 Model EYG9500GE	Frequency(Hz) 50Hz , 60Hz	 Displacement(CC) 500	Power/Speed (kW/r/min) 9.6/3000
 Rated Power 8000W	Max Power 8500W	 Fuel Unleaded Gasoline	Oil Capacity(L) 1.1
 Rated Current (A) 34.8A (@ AC 220V ~ 240V) 69.6A (@AC 110V ~ 120V)		 Fuel Tank Capacity(L) 25	Continuous Working Hours 8h (@ Full Load)
 Motor Type Magnet Motor, Single Phase		 Starting System Recoil	Operating Noise Level(7m) dB 77
 Rated Voltage (V) 220V, 230V, 240V, 110V, 120V		 Machine Dimension(L*W*H) 715*630*645mm	
 DC Output 12V5A 60W		 Engine Model LY194F1	N.W. 87KG
 Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine			


OPTIONAL FEATURES



Dual Fuel
System



Dual Voltage



Key & Button
Start



Remote Key
Start




Mobility Kit

EYG 9000GE

 Model EYG9000GE	Frequency(Hz) 50Hz , 60Hz	 Displacement(CC) 458	Power/Speed (kW/r/min) 10.3/3600
 Rated Power 7000W	Max Power 7500W	 Fuel Unleaded Gasoline	Oil Capacity(L) 1.1
 Rated Current (A) 30.4A (@ AC 220V ~ 240V) 60.9A (@AC 110V ~ 120V)		 Fuel Tank Capacity(L) 25	Continuous Working Hours 8h (@ Full Load)
 Motor Type Magnet Motor, Single Phase		 Starting System Recoil	Operating Noise Level(7m) dB 77
 Rated Voltage (V) 220V, 230V, 240V, 110V, 120V		 Machine Dimension(L*W*H) 715*630*645mm	
 DC Output 12V5A 60W		 Engine Model LY192F2	N.W. 88KG
 Engine Type Single-Cylinder , OHV , 4-Stroke , Air-Cooled , Gasoline Engine			



OPTIONAL FEATURES



Dual Fuel
System



Dual Voltage



Key & Button
Start



Remote Key
Start



Mobility Kit

High Power Inverter



Product Model	SIP-1K5U-26C		SIP-2K0U-26C		SIP-3K0U-26C	
USB1	5MAX V/3.1A		MAX 5V/3.1A			
USB2						
TYPE-C1						
TYPE-C2	27W					
Input/Output	12V	110V/60Hz	12V	110V/60Hz	12V	110V/60Hz
	12V/24V	230V/50Hz	12V/24V	230V/50Hz	12V/24V	230V/50Hz
Under-voltage Alarm	10.5VDC±0.3VDC/21VDC±0.3VDC					
Under-voltage Shutdown	9.5VDC±0.3VDC/19VDC±0.3VDC					
Over-voltage Shutdown	16VDC±0.5VDC/31VDC±0.5VDC					
Inverter AC Output Power	1500W		2000W		3000W	
Inverter AC Output Peak Power	3000W		4000W		6000W	
UPS Switching Power	1500W		2000W		3000W	
AC Input Voltage Range			115V±10%			
			230V±10%			
AC Charging Power	1000W					
PV Input Voltage Range	750W		24V-60V		1500W	
PV Charging Power	MAX 400W					
LCD Display	/		Main Unit with LCD Display		MAX 800W	
Wired Control	Wired Control Without Display					
THD Value	≤3%					
Protection Function	Under-voltage, Over-voltage, Over-temperature, Overload, Short-circuit, Over-charge, Reverse polarity protection					

High-Performance Industrial Power Station



Specification

PG3600	
Basic Parameters	
Product Name	PG3600
Product Model	PHS3600P
Net Weight	24kg
Dimension((WxHxD))	526*485*211mm
Capacity	2304Wh
Protection Rating	IP54
Cooling Method	Natural Cooling
Operating Altitude	2000 meters
Indicator	10 - level battery level indicator
Standards	IEC 62619, UN 38.3, IEC 62477, IEC61000
Output Specification	
Rated Output Voltage	230V, Pure sine wave
Rated Output Voltage Range	230±5Vac
Rated Output frequency	50Hz
Rated Output Power	3,600W
150% Overload	4000W~5400W, >500s
200% Overload	5400W~7200W, >50s
250% Overload	7200W~9000W, >10s
Other Overload	>9000W, >1s
Peak Power	20000W
Output Peak Current	140A (Max. Instantaneous Value)
No - load Power Consumption	≤30W
Input Specification	
Rated Input Voltage	230VAC
Rated Input Voltage Range	176~264 VAC
Input Frequency Range	45~65Hz
Max. Input Power	1200W
Rated Input Current	6A (Max. Input Current 8A)
Operating Temperature	
Operating Temperature	Charge at 5 to 40°C, Discharge at -15°C to 55°C
Storage Temperature	-20°C to 60°C (1 month); -20°C to 45°C (3 months)
Operating Humidity	10~90% RH
Storage Humidity	5~95% RH



POWER TO EVERY CORNER

 erayakpower.com

 partners@erayakpower.com