



www.cnspx.com
www.spxelectric.com

SPX MISTY FAN



With the Wind of Technology

Leading the Way

Heartbeat of Global Equipment

ZHEJIANG SPX
ELECTRIC APPLIANCE CO.,LTD.



Zhejiang SPX Electrical Appliance Co., Ltd. is an enterprise integrating scientific research, development, production and sales. The factory is located in Yueqing Economic Development Zone, and its products are sold worldwide.

The company owns standard workshops and advanced production equipment, as well as a well-trained professional technical team. Our complete quality assurance system runs through every production process.


SPX Company produces mist fans, industrial fans, etc., which are widely used in factory workshops, sports venues, livestock farms and outdoor places. The company has passed China Compulsory Certification (CCC), CE certification and ISO9001 standard certification.

The company has a modern workshop of more than 10,000 square meters, first-class laboratories, processing centers, testing centers and first-class equipment, ensuring the high quality of our products. We welcome customers at home and abroad to visit our company, cooperate hand in hand, mutual benefit, and create a brilliant future together.



Application Scenarios

1. Outdoor Cooling System Fans Series
2. House Use Mist Fan
3. Powerful Industrial Fans Series
4. Electro-machinery Equipment

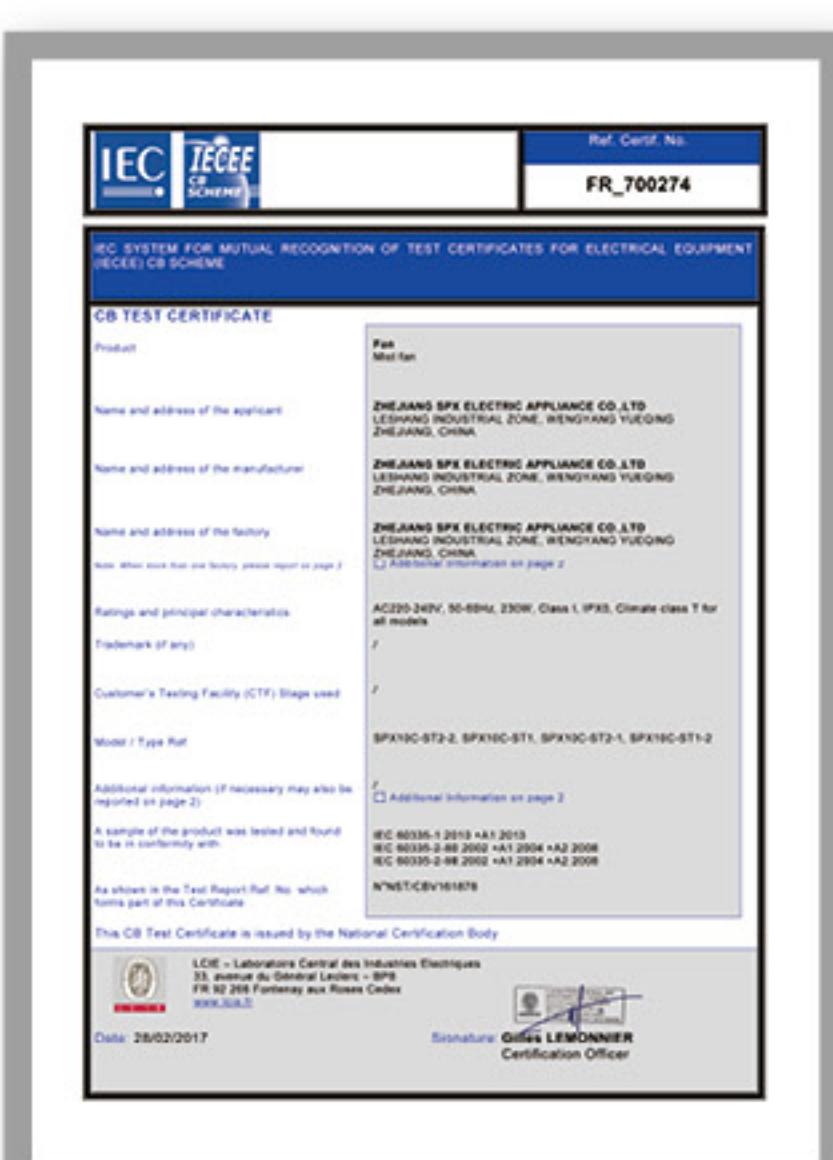

Indoor And Outdoor Cooling System

Misty Fans Series

ZHEJIANG SPX
ELECTRIC APPLIANCE CO.,LTD.



SPX-ST3-G (30")



SPX-ST3-G (26")



SPX-ST3-G (20")

Characteristic

Model	Parameter
Diameter of blade(mm)	650/26"
Outline dimensions(mm)	708/482/2050/675
Water tank capacity(L)	48


Model	Parameter		
Speed	Low	Medium	High
Power	260	285	310
Speed(rpm)	1100	1250	1400
Air volume(m^3/min)	143	174	220
Noise(dB)	58	62	70
Maximum atomization value(L/H)			7

Outdoor Mist Fan(20", 26", 30")

- Adopt optimized centrifugal misting system with large mist volume and small fog particles.
- Conical diversion ring and diversion plate are set up to effectively increase the blowing distance and mist coverage range.
- With rain-proof electrical design, safe to use, and equipped with handcart for light movement.
- Misting and air supplying are driven by different motors, which can control the misting and air supplying functions independently.
- Good misting effect without water dropping and adjustable misting volume; water pump with water level detection function to avoid water shortage and dry burning, safe and reliable to use.
- Oscillation function and adjustable blowing angle for easy use.
- Three speeds, independent control for misting and oscillation function.
- Outdoor polyester spraying surface with good rust prevention performance and durability.

Indoor And Outdoor Cooling System

Misty Fans Series

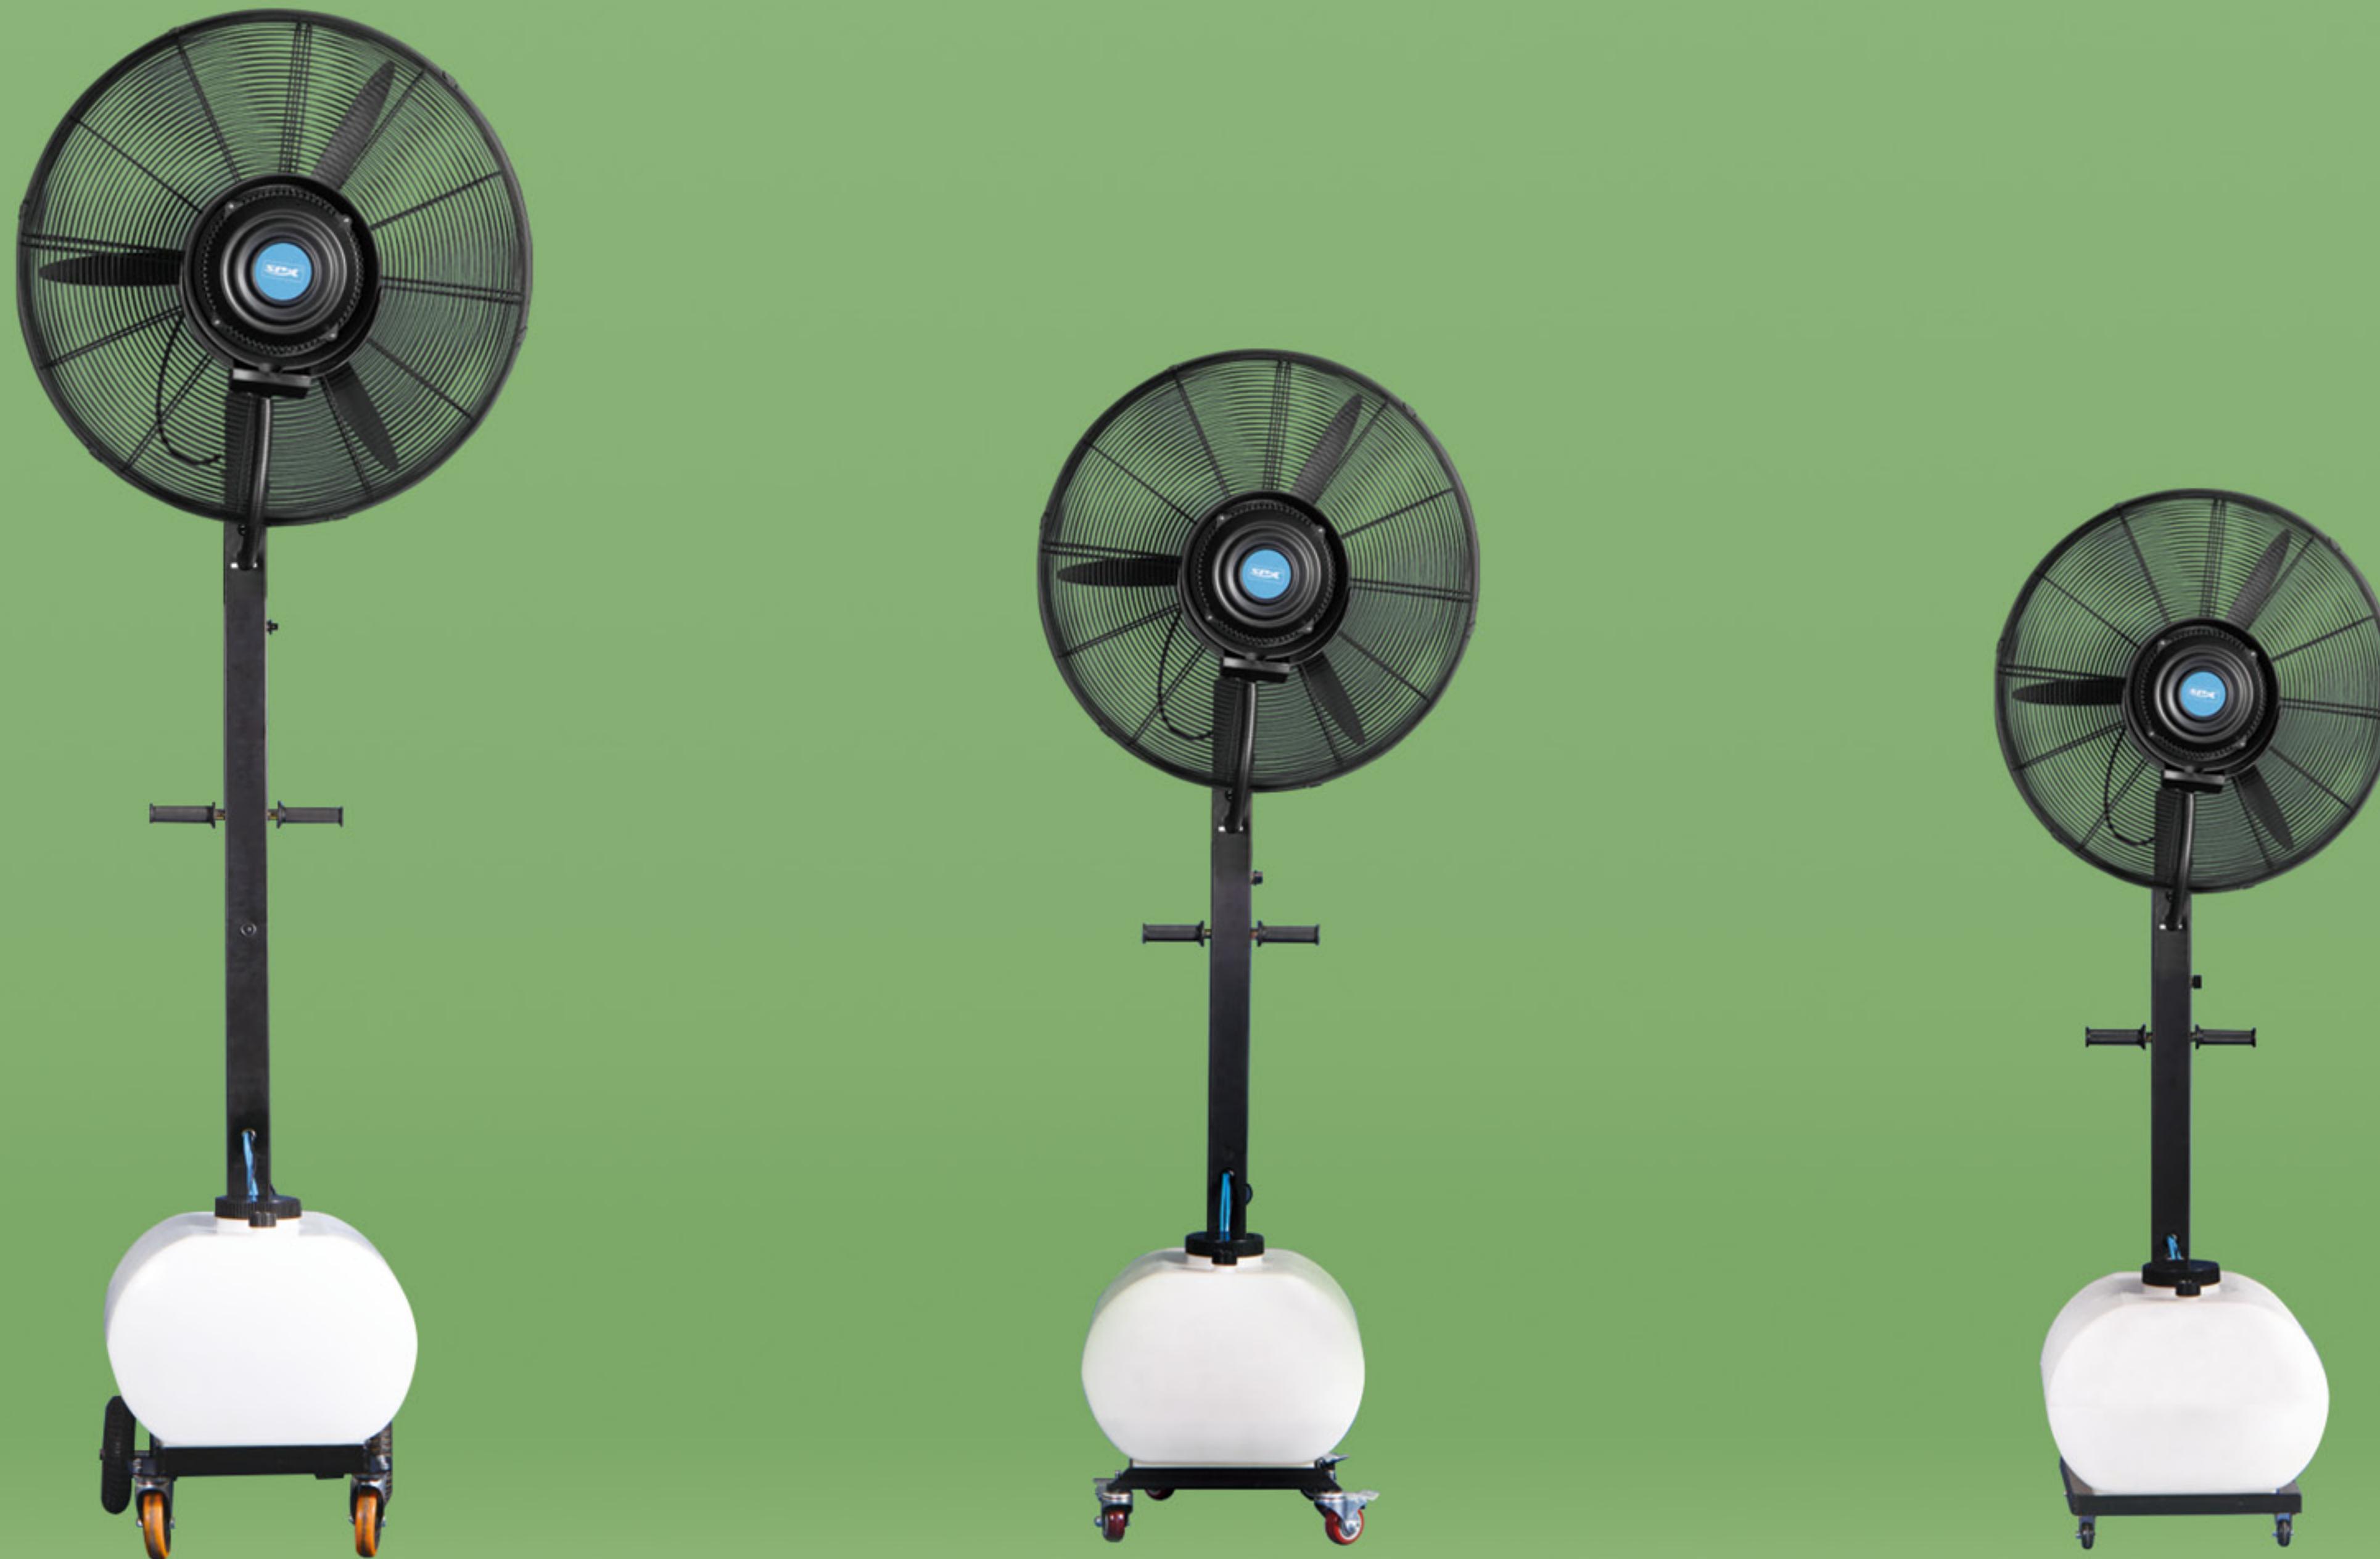

SPX10C-ST1-2 (30")

SPX10C-ST1-2 (26")

SPX10C-ST1-2 (20")

Characteristic

Model	Parameter	Model	Parameter
Fan diameter	500mm(20inches), 650mm (26inches), 750mm(30inches)	Dielectric Strength	1 min at 1500VAC/50-60Hz, current<5mA
Fan oscillation adjustable	90 degrees automatically	Operation Temperature	10°C ~60°C
Fan tilt adjustable	30 deg	Operation Humidity	10%~85%
Available area	30-50 m ³	Working voltage	100V-120V for 110V and 190V-250V for 220V
Tap water supply	Availability	Fan height	2200mm/2000mm/1700mm
Temperatures drop	4°C ~ 8°C	Water tank capacity	60 liters
		Continuance water supply	15 hours

Outdoor Mist Fan(20", 26", 30")

- Centrifugal atomization design, without nozzle, no need for water-filtration equipment.
- Adjustable misting volume, low noise.
- Atomization and Air-delivery driven by separate motor, convenient to use and easy to maintain.
- The fan surface with powder coating, good rust prevention and long service life.
- Motor with low-temperature-rise design, steady performance, long-life operation and good overload protect;
- Protective device for pump running when water is over.
- 90° oscillation, three speeds.
- Waterproof electric design, safe to use.
- With handcart, active to move.
- Utilized CAD optimized design, good and graceful-looking.
- Special fields applications, such as livestock farm, greenhouse, mushroom breeding field, etc.

Indoor And Outdoor Cooling System

Misty Fans Series

ZHEJIANG SPX
ELECTRIC APPLIANCE CO.,LTD.



SPX10C-ST1

SPX10C-ST2-1

SPX10C-ST2-2

Characteristic

Model	Parameter	Model	Parameter
Fan diameter	500mm(20inches), 650mm (26inches), 750mm(30inches)	Dielectric Strength	1 min at 1500VAC/50-60Hz, current<5mA
Fan oscillation adjustable	90 degrees automatically	Operation Temperature	10°C ~60°C
Fan tilt adjustable	30 deg	Operation Humidity	10%~85%
Available area	30-50 m ³	Working voltage	100V-120V for 110V and 190V-250V for 220V
Tap water supply	Availability	Fan height	1700mm/2000mm/2200mm
Temperatures drop	4°C ~ 8°C	Water tank capacity	36 liters/20 liters
		Continuance water supply	8 hours/6 hours

Outdoor Mist Fan(20", 26", 30")

- Centrifugal atomization design, without nozzle, no need for water-filtration equipment.
- Adjustable misting volume, low noise.
- Atomization and Air-delivery driven by separate motor, convenient to use and easy to maintain.
- The fan surface with powder coating, good rust prevention and long service life.
- Motor with low-temperature-rise design, steady performance, long-life operation and good overload protect.
- Protective device for pump running when water is over.
- 90°oscillation, three speeds.
- Waterproof electric design, safe to use.
- With handcart, active to move.
- Utilized CAD optimized design, good and graceful-looking.
- Special fields applications, such as livestock farm, greenhouse, mushroom breeding field, etc.

Indoor And Outdoor Cooling System

Misty Fans Series



SPX10C-WL

Characteristic

Model	Parameter	Model	Parameter
Fan diameter	500mm(20inches), 650mm (26inches), 750mm(30inches)	Dielectric Strength	1 min at 1500VAC/50-60Hz, current<5mA
Fan oscillation adjustable	90 degrees automatically	Operation Temperature	10°C ~60°C
Fan tilt adjustable	30 deg	Operation Humidity	10%~85%
Available area	30-50 m ³	Working voltage	100V-120V for 110V and 190V-250V for 220V
Tap water supply	Availability	Water tank capacity	16 liters
Temperatures drop	4°C ~ 8°C	Continuance water supply	Yes
		The best height of mounting	2.0m-2.5m

Outdoor Mist Fan(20", 26", 30")

- Centrifugal atomization design, without nozzle, no need for water-filtration equipment.
- Adjustable misting volume, low noise.
- Atomization and Air-delivery driven by separate motor, convenient to use and easy to maintain.
- The fan surface with powder coating, good rust prevention and long service life.
- Motor with low-temperature-rise design, steady performance, long-life operation and good overload protect.
- Protective device for pump running when water is over; 90°oscillation, three speeds.
- Waterproof electric design, safe to use.
- Utilized CAD optimized design, good and graceful-looking.
- Special fields applications, such as livestock farm, greenhouse, mushroom breeding field, etc.



ZHEJIANG SPX ELECTRIC APPLIANCE CO.,LTD.

Tel: +86-577-62982277

Fax: +86-577-62983788

E-mail: sales@cnspx.com

Http: //www.cnspx.com www.spxelectric.com