

Technical Data Sheet (TDS)

Hyper Speed Triple Color Silk PLA

Eryone Hyper Speed Triple Color Silk PLA filament extrudes three colors simultaneously, resulting in vibrant and varied colors visible on different surfaces with smooth color transitions. Utilizing a comprehensively improved formula, it offers significantly faster printing speeds compared to standard silky PLA, reaching up to 500 mm/s. Furthermore, its tensile strength is greatly enhanced, with a Z-axis tensile strength approaching 20 MPa. This high-speed silky PLA material delivers a brighter surface with a silky sheen. Brightness can be controlled by adjusting temperature and speed: higher temperatures and lower printing speeds result in greater brightness.

Part I: Suggests Printing Parameters

Parameter	Set up
Nozzle temperature	190℃-220℃
Bed temperature	55-70℃
Bed material	glass, PEI, spring steel plate
Bottom printing temperature	190℃-220℃
Sealed printing	Open Printing/closed printing
Printing speed	30-500mm/s
Drying conditions	50℃-60℃ , 6h

Part II: Physical Properties of Materials

Property	Testing Method	Unit	Typical Value
Density(g/cm ³ at 21.5 ° C)	ASTM D792 (ISO 1183, GB/T 1033)	g/cm ³	1.32
Vicat Softening Temperature(° C)	ASTM D1525 (ISO 306 GB/T 1633)	℃	56
Heat distortion temperature(° C)	ASTM D648 0.45MPa	℃	50
Glass transition temperature (° C)	DSC, 10 ° C/min	℃	57
Melt Index(g/10 min)	220 ° C, 10kg 240 ° C, 2.16 kg	g/10min	20±1.5


Part III: Mechanical Properties of Printed Samples

Property	Test conditions	Test standards	unit	Typical Value
Tensile strength X-Y	50mm/min	GB/T 1040.4	MPa	62.7
Elastic modulus X-Y	50mm/min	GB/T 1040.1-2006	MPa	1932.1
Elongation at break X-Y	50mm/min	GB/T 1040.4	%	2.3
Tensile strength X-Z	50mm/min	GB/T 1843	MPa	19.1
Elastic modulus X-Z	50mm/min	GB/T 1040.1-2006	MPa	1873.5
Elongation at break X-Z	50mm/min	GB/T 1040.4	%	1.9
Bending strength	2mm/min	GB/T 9341	MPa	86.7
Bending modulus	2mm/min	GB/T 9341	MPa	2917.3
Charpy Impact strenght	2.75J	GB/T 1843	kJ/m2	3.8

Note: All splines are printed under the following conditions: printing temperature=215 ° C, printing speed=80mm/s, base plate 60 ° C, filling=100%, nozzle diameter=0.4mm


TENSILE TESTING SPECIMEN

ISO 527,GB/T 1040

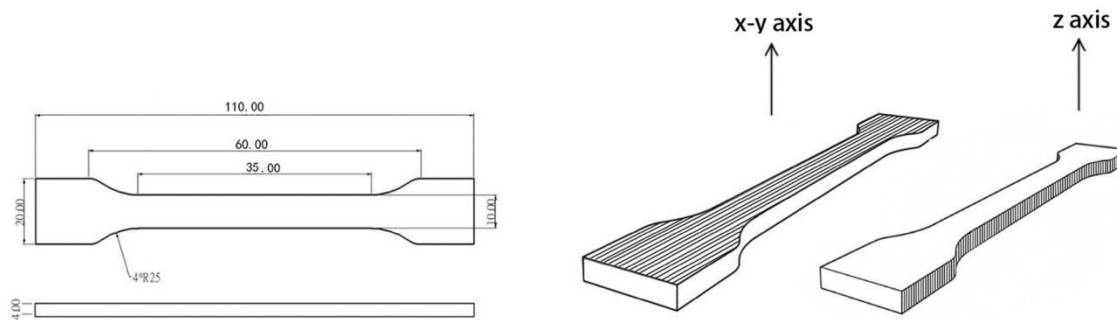


FLEXURAL TESTING SPECIMEN

ISO 178,GB/T 9341

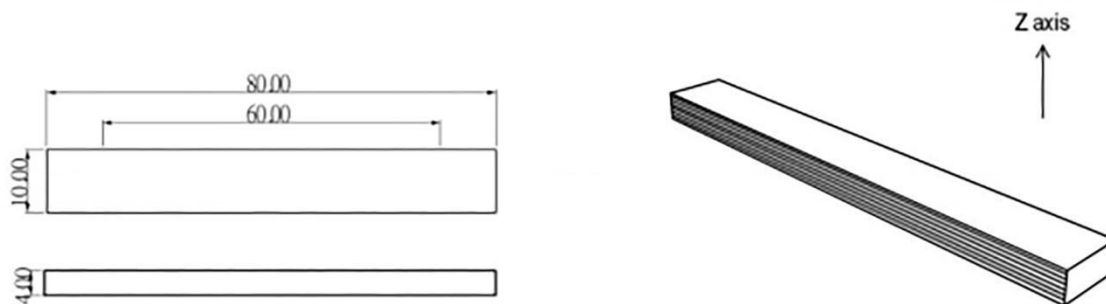

IMPACT TESTING SPECIMEN

ISO 179,GB/T 1043

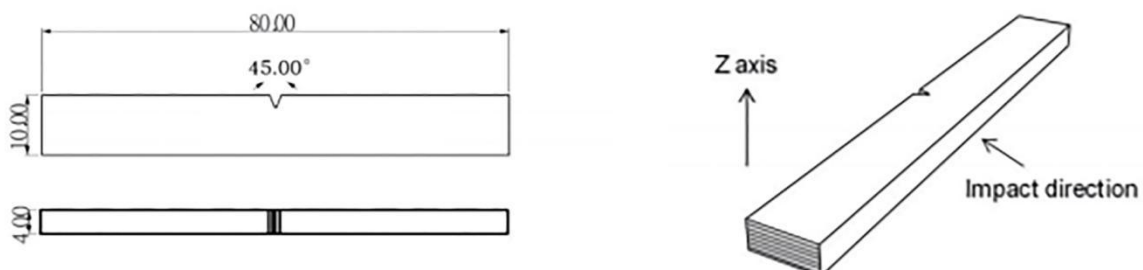

Disclaimers

The values given in this data table are for reference and comparison only. They should not be used for design specifications or quality control. The actual value may vary depending on the printing conditions. The final performance of printed components depends not only on the material, but also on the component design, environmental conditions, printing conditions, and so on. Product specifications are subject to change without prior notice.