



www.wh-cabinetled.com

深圳市维晖科技有限公司
Shenzhen Weihui Technology Co., Ltd.

+86 755-28680576
+86 18123624315
sales@wh-cabinetled.com
www.wh-cabinetled.com
4th Floor, Building B, District 2, XinWang Industrial Park, No. 28,
LongTeng Street, Jianlong Road, Yuanshan, Longgang District, Shenzhen



WeChat



WhatsApp

THE ZENITH OF CABINET LED SOLUTION

APPLICATION MANUAL

COMPANY

Shenzhen Weihui Technology Co., Ltd. is a factory focusing on LED furniture cabinet lighting. The main business include LED cabinet lights, drawer lights, wardrobe lights, wine cabinet lights, shelf lights, etc. As a company which have almost ten years production time in LED light field, We have rich experience in applying the latest LED technology to furniture, Providing clients with high-performance products and satisfactory local lighting solutions, The brand "WH", the overall color of orange and gray, shows our vitality and positive attitude, as well as the adherence to cooperation, Win-Win and innovation.

Shenzhen Weihui Technology will continue to combine LED latest achievements with furniture. We will lead LED furniture cabinet lighting with our customers, our suppliers, and company employees together. Make Latest LED brighten in furniture cabinet !



1. After-80s Energetic Team

> All after 80s young team, dynamism and experience coexist



2. Focus On Small Area

> Only focus on complete solutions on cabinet & furniture lighting




3. OEM & ODM Welcome

> Custom-made / No MOQ and OEM available



4. 5 Years Warranty

> 5 Years warranty, quality guaranteed



5. Professional R&D Team

> Professional R&D team, monthly new product release



6. More than 10 Years LED Factory Experience

> More than 10 Years rich experience, Deserve to trust

Q: How do we combine furniture with latest LED technology?

As we all know, Soft lighting with easy installation are major characteristics of furniture lighting applications. WeiHui lighting is the first factory who applied COF led strip light into furniture lighting solution system, which solved long-term problems in dot lighting source with very soft lighting effect. Meanwhile, Recent cutting free led strip light make the custom-made installation and after service super easily too. Free cut and Free reconnect without any soldering. WeiHui lighting led light, It is simple but "Not Simple".

Q: How can we guarantee the quality?

1. Formulate corresponding company inspection standards to suppliers, production departments and quality control center, etc.
2. Control strictly the quality of raw material, inspection production in multiple directions.
3. 100% Inspection and aging testing for finished product, storage rate no less than 97%
4. All inspections have records and responsible persons. All records are reasonable and well-documented.
5. All employees would be given professional training before officially working. Periodic training update.

Q: How do we develop new products?

1. Market research;
2. Project establishment and formulation of project plan;
3. Project design and review, cost budget estimation;
4. Product design, prototype making and testing;
5. Trial production in small batches;
6. Market feedback;

Q: How do we plan our future?

The future will be the era of global intelligence. LZ lighting will continue to dedicate itself to the Intelligence of cabinet lighting solution, develop smart lighting control system with wireless control, blue-tooth control, WIFI control, etc. LZ lighting led light, It is simple but "Not Simple".

CONTENTS

A

Sensor Switch Series

★	Central Controlling Led Sensor Switch Series	05-12
★	Smart Wireless Remote Control Series	13-16
★	High Voltage Sensor Switch Series	17-18
★	PCBA Sensor Switch Series	19-20
01	IR Sensor Switch Series	23-26
02	Touch Sensor Switch Series	27-30
03	PIR Sensor Switch Series	31-32
04	Mirror Switch Series	33-36
05	Hidden Sensor Switch Series	37-38
06	Mechanical Switch Series	39-42

B

LED Light Series

★	LED Welding-Free Strip Lights	47-60
★	All Black Strip Lights	61-62
01	LED Under Cabinet Lights	65-68
02	LED Drawer Lights	69-74
03	LED Wardrobe Lights	75-78
04	LED Shelf Lights	79-86
05	Anti-Glare Strip Lights	87-90
06	Battery Cabinet Lights	91-92
07	LED Panel Lights	93-94
08	LED Puck Lights	95-106
09	Jewelry Lights / Track Lights	107-120

C

LED Driver Series

01	Serial number: PZ	125-126
02	Serial number: FG	127-128
03	Serial number: G	129-130
04	Serial number: T1	131-132
05	Serial number: T2	133-134
06	Serial number: A	135-136

D

Flexible Light Series

01	COB Flexible Light Series	141-146
02	SCOB Flexible Light Series	147-148
03	SMD Flexible Light Series	149-150
04	Quick Connector Series	151-152

E

Accessories Series


01	Accessories Series	155
02	Show Panel Series	156
03	Aluminium Profile Appendix	157-162



SENSOR SWITCH SERIES

- ★ Central Controlling Led Sensor Switch Series
- ★ Smart Wireless Remote Control Series
- ★ High Voltage Sensor Switch Series
- ★ PCBA Sensor Switch Series

- 01 IR Sensor Switch Series
- 02 Touch Sensor Switch Series
- 03 PIR Sensor Switch Series
- 04 Mirror Switch Series
- 05 Hidden Sensor Switch Series
- 06 Mechanical Switch Series

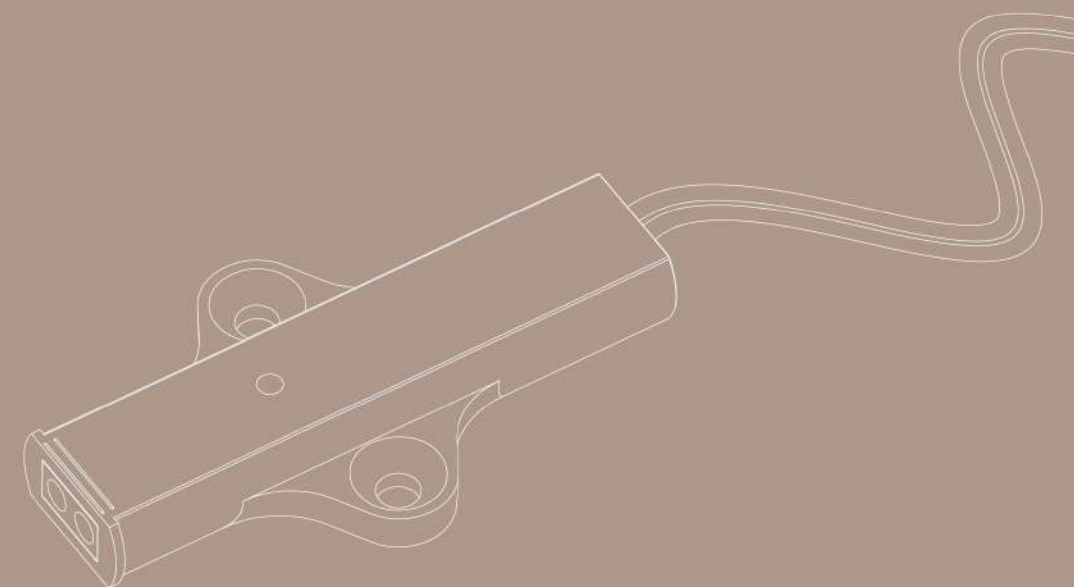




Central Controlling Led Sensor Switch Series



LED SENSOR SWITCH SERIES (Central controlling led sensor switch series)

S2A-JA0 Door trigger sensor switch



Model	S2A-JA0
Hole Size	Φ12X18mm
Voltage	DC12V-24V
Function	Sensing distance 5~8cm
Material	Plastic, Black/White
Installation	Recessed / Surfaced

S3B-JA0 Hand shaking sensor switch




Model	S3B-JA0
Hole Size	Φ12X18mm
Voltage	DC12V-24V
Function	Sensing distance 5~8cm
Material	Plastic, Black/White
Installation	Recessed / Surfaced

S4B-JA0 Touch sensor switch




Model	S4B-JA0
Hole Size	Φ12X18mm
Voltage	DC12V-24V
Function	ON/OFF/Dimmer
Material	Plastic, Black/White
Installation	Recessed / Surfaced

S6A-JA0 PIR sensor switch



Model	S6A-JA0
Hole Size	Φ12X18mm
Voltage	DC12V-24V
Function	Sensing time 30s
Material	Plastic, Black/White
Installation	Recessed / Surfaced


S2A-JA1 Double door trigger sensor switch



Model	S2A-JA1
Hole Size	38x26x8mm
Voltage	DC12V-24V
Function	Sensing distance 3~6cm
Material	Plastic, Black/White
Installation	Recessed / Surfaced


LED SENSOR SWITCH SERIES (10mm series--Central control)

SJ5-2A Door trigger sensor switch




Model	SJ5-2A
Hole Size	Φ10X13mm
Voltage	DC 12V&24V
Function	Sensing distance 5~8cm
Material	Plastic, Black/White
Installation	Recessed /Surfaced

SJ5-3B Hand shaking sensor switch




Model	SJ5-3B
Hole Size	Φ10X13mm
Voltage	DC 12V&24V
Function	Sensing distance 5~8cm
Material	Plastic, Black/White
Installation	Recessed /Surfaced

SJ5-4B Touch sensor switch




Model	SJ5-4B
Hole Size	Φ10X13mm
Voltage	DC 12V&24V
Function	ON/OFF/Dimmer
Material	Plastic, Black/White
Installation	Recessed /Surfaced

SJ5-6A PIR sensor switch



Model	SJ5-6A
Hole Size	Φ10X13mm
Voltage	DC 12V&24V
Function	Sensing time 30s
Material	Plastic, Black/White
Installation	Recessed /Surfaced

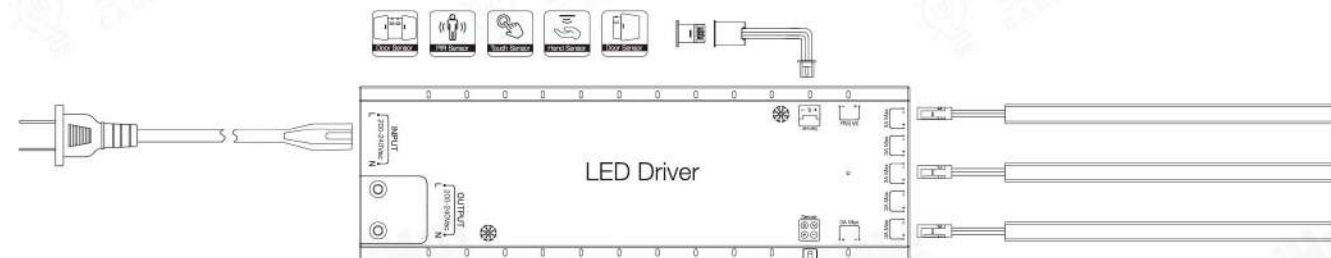

LED DRIVER SERIES (15MM THICKNESS)


12V & 24V System Both

CE (LVD & EMC) RoHS Reach WEEE ERP




Model	Size	Input Voltage	Output Voltage	Max Wattage	PF
PZ5B-xx10E(-EC)	150x57x15mm	200-240Vac	DC12V / 24V	10W	0.5 (0.8)
PZ5B-xx20E(-EC)	150x57x15mm	200-240Vac	DC12V / 24V	20W	0.5 (0.8)
PZ5B-xx40E(-EC)	180x57x15mm	200-240Vac	DC12V / 24V	40W	0.5 (0.95)
PZ5B-xx60E(-EC)	210x75x15mm	200-240Vac	DC12V / 24V	60W	0.5 (0.95)
PZ5B-xx100E(-EC)	230x75x15mm	200-240Vac	DC12V / 24V	100W	0.5 (0.95)
PZ5B-xx150E(-EC)	230x75x15mm	200-240Vac	DC24V	150W	0.5 (0.95)

xx (12V or 24V)

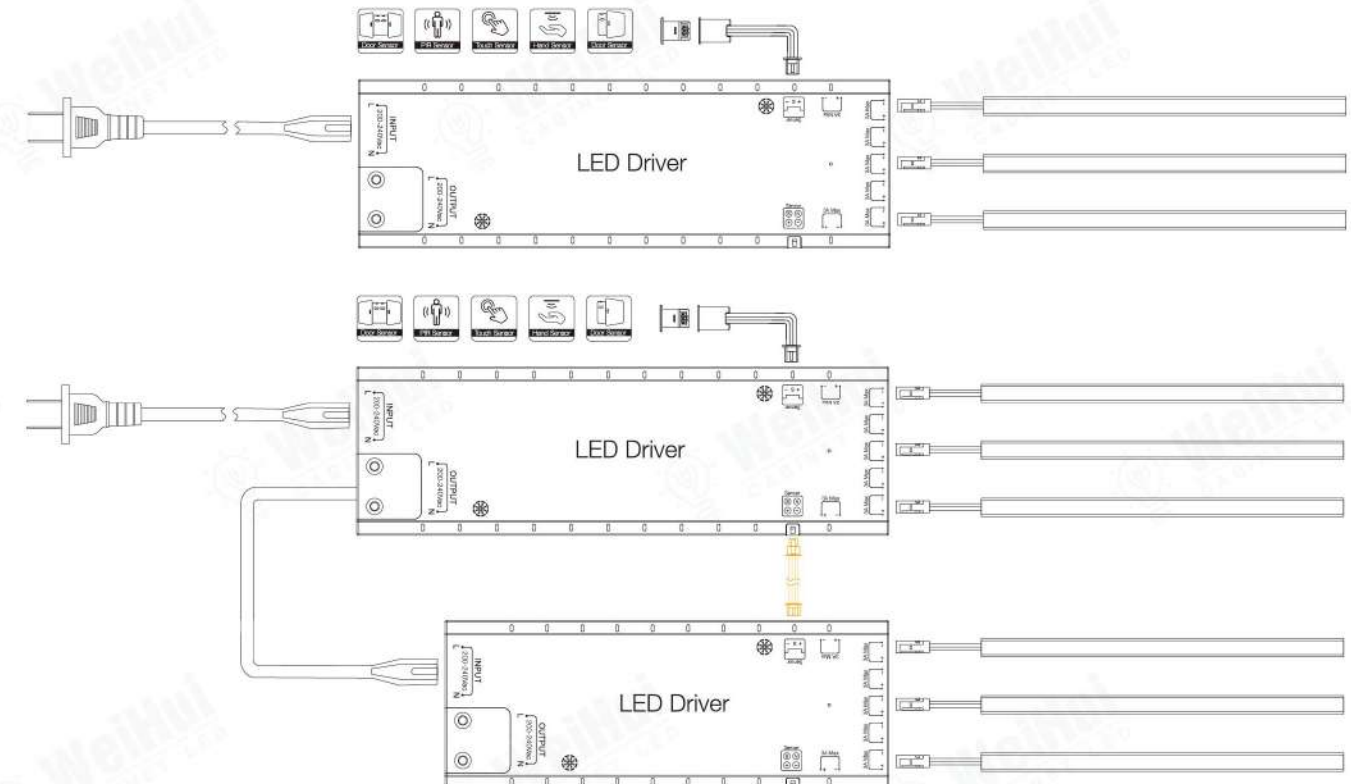

MOUSE BOX (MULTI-FUNCTION)

Available both 10mm & 12mm Sensor Series

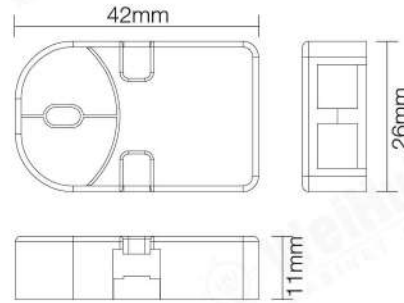

Model : SJ1 / SJ1U / SJ1V

Size : 42x26x11mm

Voltage: DC12V-24V

Material : Plastic, Black / White

SJ1 (Regular)


SJ1U (Door Trigger / PIR Sensor)

SJ1V (Hand Shaking / Touch Sensor)


SJ1

Connection Diagram: Central Controlling LED Sensor Switches System + Mouse box
(LED sensor can be used with other type LED driver)

Connection 1

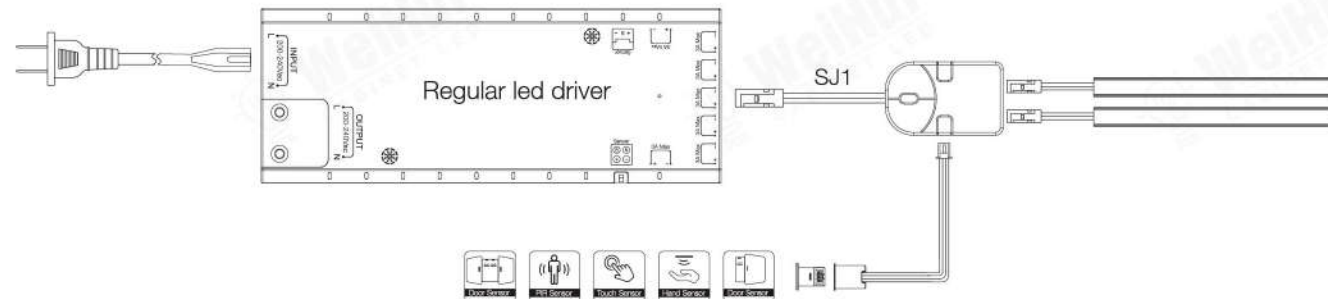


Connection 2

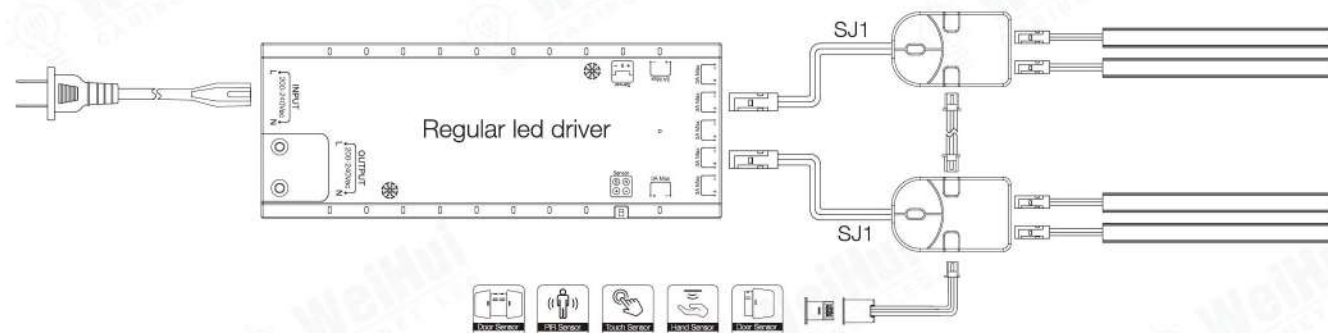


SJ1U

Multi Door or PIR Sensor in one Mouse box from 1 to 4 pcs sensing head

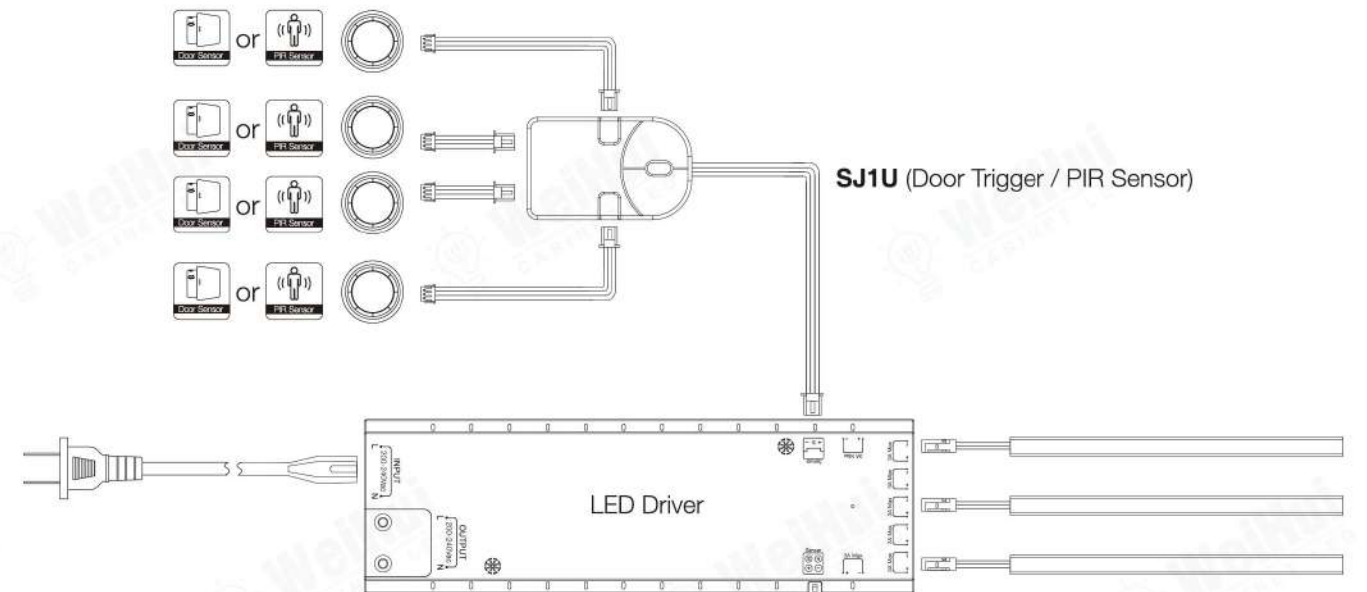


SJ1V

Multi Shaking or Touch Sensor in one Mouse box from 1 to 4 pcs sensing head

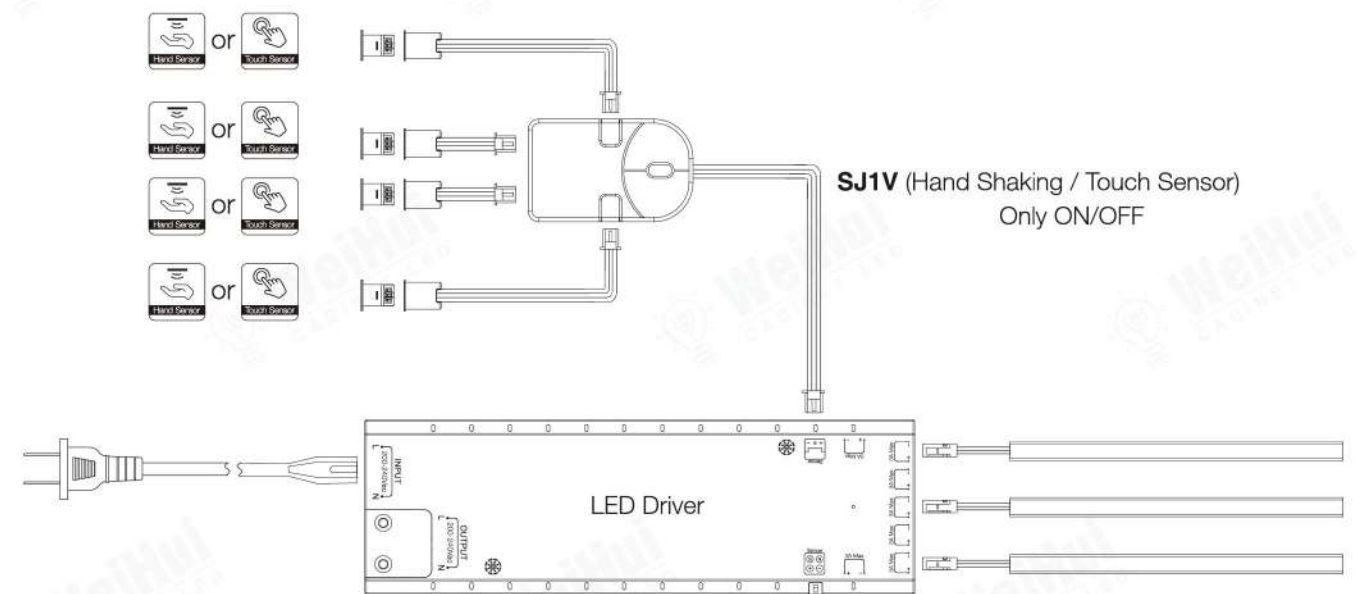

SG1 High Voltage Sensor Switch Series (Central Control Series)

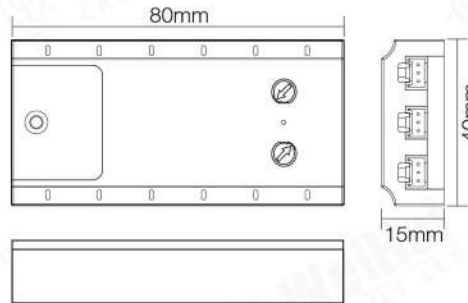

Model : SG1
Size : 80x40x15mm
Voltage: AC100-240V
Max Load: 300W
Material : Plastic, Black / White



SJ5-2A
Door trigger sensor switch



SJ5-3A
Hand shaking sensor switch




SJ5-4A
Touch sensor switch




SJ5-6A
PIR sensor switch

Universal High-Voltage Box can realize all functions by connecting different sensing head. Multi head available from 1 to 3. PIR Sensor can adjust with different times.

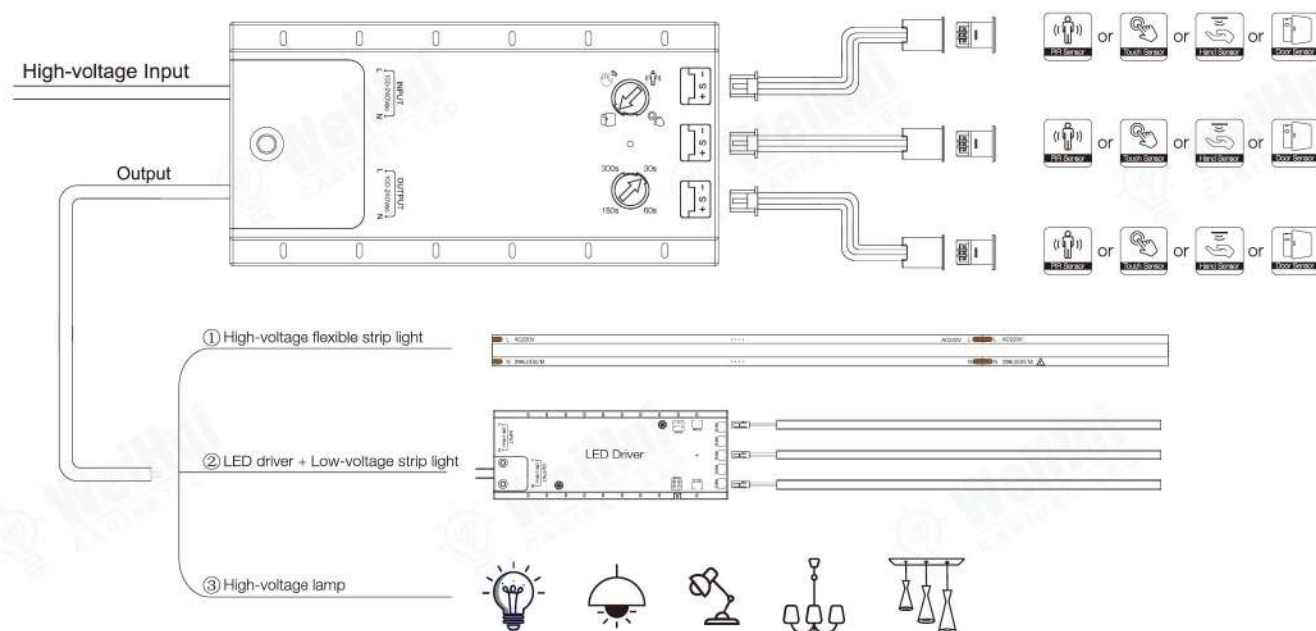


Different Function by Rotating the knob
Mode 1. Hand shaking
Mode 2. Door trigger
Mode 3. Touch sensor
Mode 4. PIR Sensor



In PIR Sensor Mode,
Different times available
by Rotating the knob,
such as 30S/60S, etc.

SG2 High Voltage Sensor Switch Series (Regular IR Series)

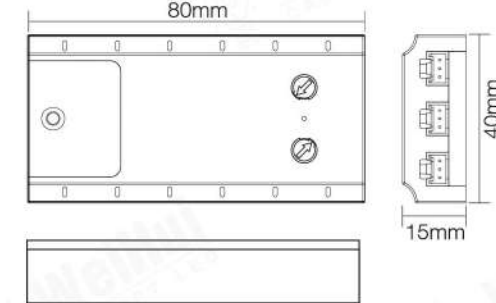


Model : SG2
Size : 80x40x15mm
Voltage: AC100-240V
Max Load: 300W
Material : Plastic, Black / White



IR Sensor Switch (8mm)
Door trigger & Hand shaking delay sensor switch


High voltage IR Sensor switches can exchange function between hand shaking and door trigger, Multi head from 1 to 3 by rotating the knob.

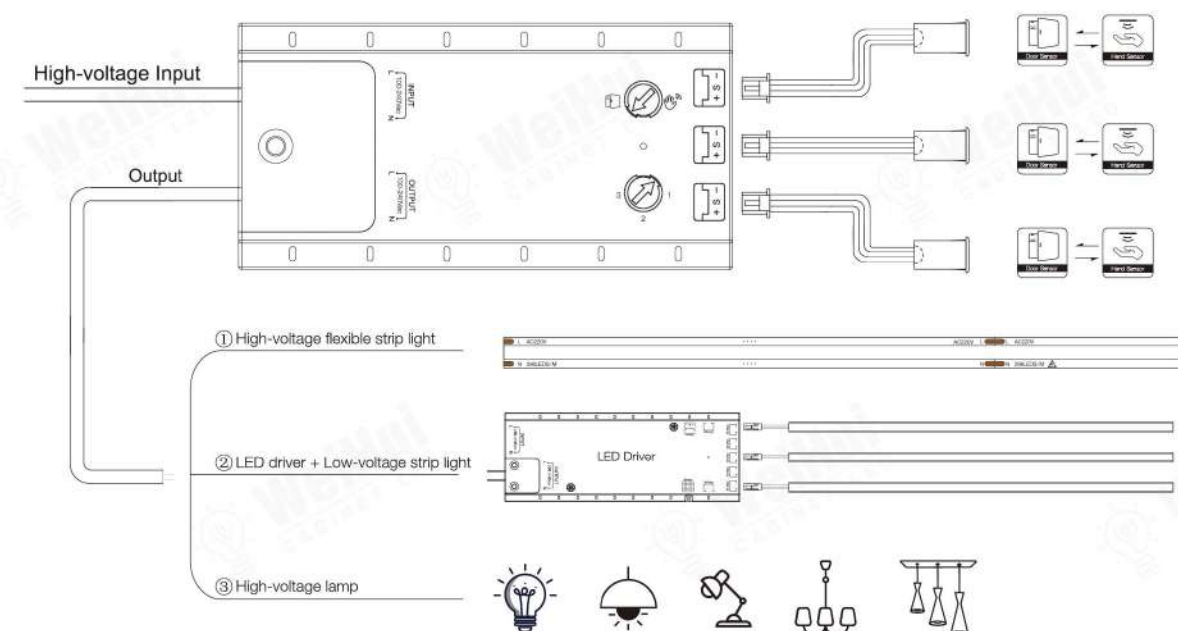

Different Function by Rotating the knob
Mode 1: Hand shaking
Mode 2: Door Trigger



Multi Head options by Rotating the knob
Mode 1: One Head
Mode 2: Double Head
Mode 3: Triple Head

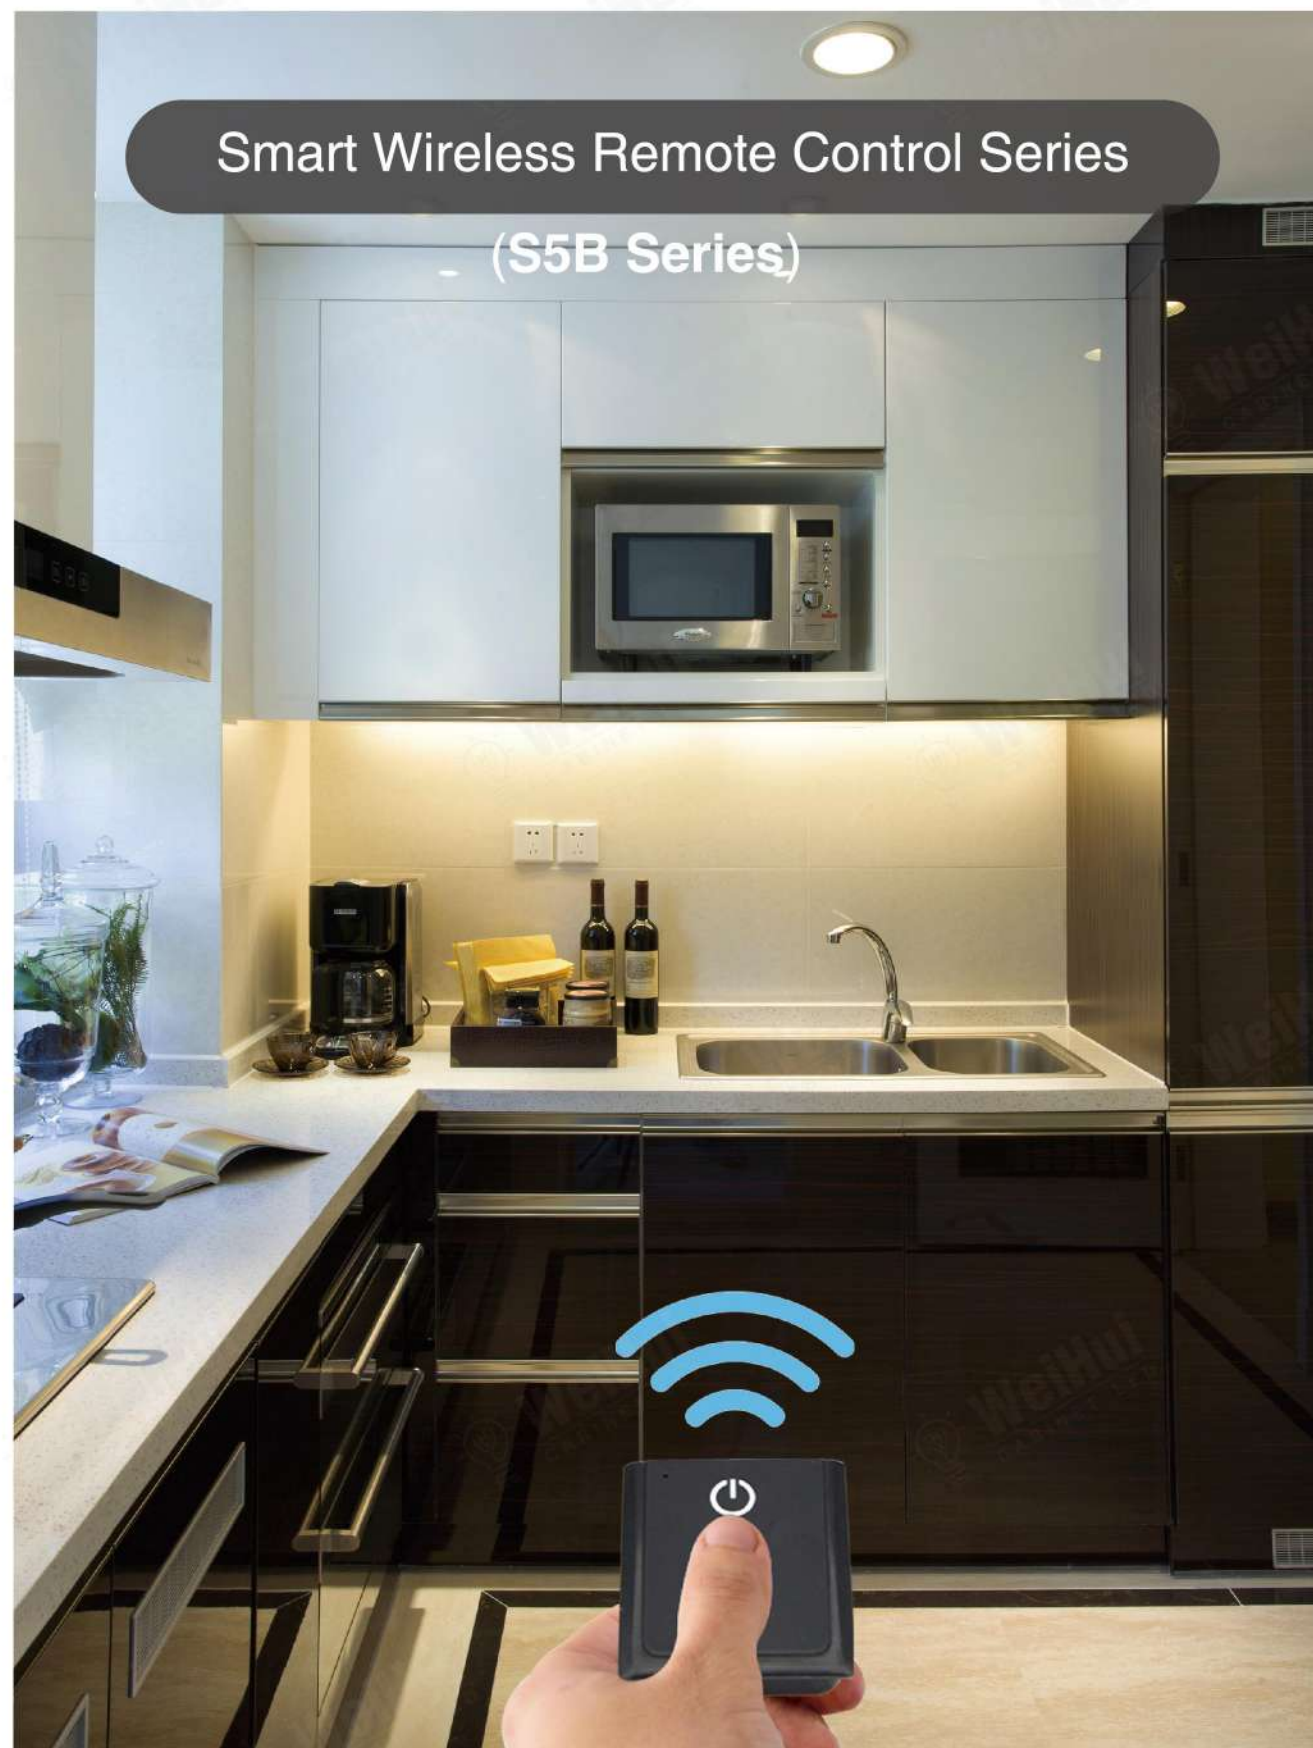

SMART WIRELESS REMOTE CONTROLLER SYSTEM

Sender Part

S5B-A0-P1



Single Touch Wireless Sender
(Magnet door sensor function)

Working Frequency	2.4GHz
Modulation Mode	GFSK
Working Voltage	2.3~3.6V (Battery type: CR2032)
Launch Distance	20m (Without barrier)
Size	56x50x13mm

S5B-A0-P2



PIR Motion Sensor Wireless Sender
(Dimming Function)

Working Frequency	2.4GHz
Modulation Mode	GFSK
Working Voltage	2.3~3.6V (Battery type: CR2032)
Launch Distance	20m (Without barrier)
Size	56x50x13mm

S5B-A0-P3



Dimming & CCT Adjusting Wireless Sender
(Magnet door sensor function)

Working Frequency	2.4GHz
Modulation Mode	GFSK
Working Voltage	2.3~3.6V (Battery type: CR2032)
Launch Distance	20m (Without barrier)
Size	56x50x13mm

One to multi control

- One sender can control multiple receivers; (Theoretically unlimited quantity within the receiving range)

Multi to one control

- One receiver can be controlled by multiple Senders (<5)

Receiver Part-Direction Connection

SD1-R1



+



CCT Adjusting Wireless Receiver

Connection way	2.4GHz & Tuya
Modulation Mode	GFSK
Working voltage	DC12V/24V, 8A
Max load wattage	72W
Size	75x54x15mm

SD1-R2



+



Single Wireless Receiver

Connection way	2.4GHz & Tuya
Modulation Mode	GFSK
Working voltage	DC12V/24V, 8A
Max load wattage	100W
Size	75x54x15mm

SD1-R3




+



Single Wireless Receiver (Central control)

Connection way	2.4GHz & Tuya
Modulation mode	GFSK
Working voltage	DC12V/24V
Max load wattage	/
Size	47x26x15mm

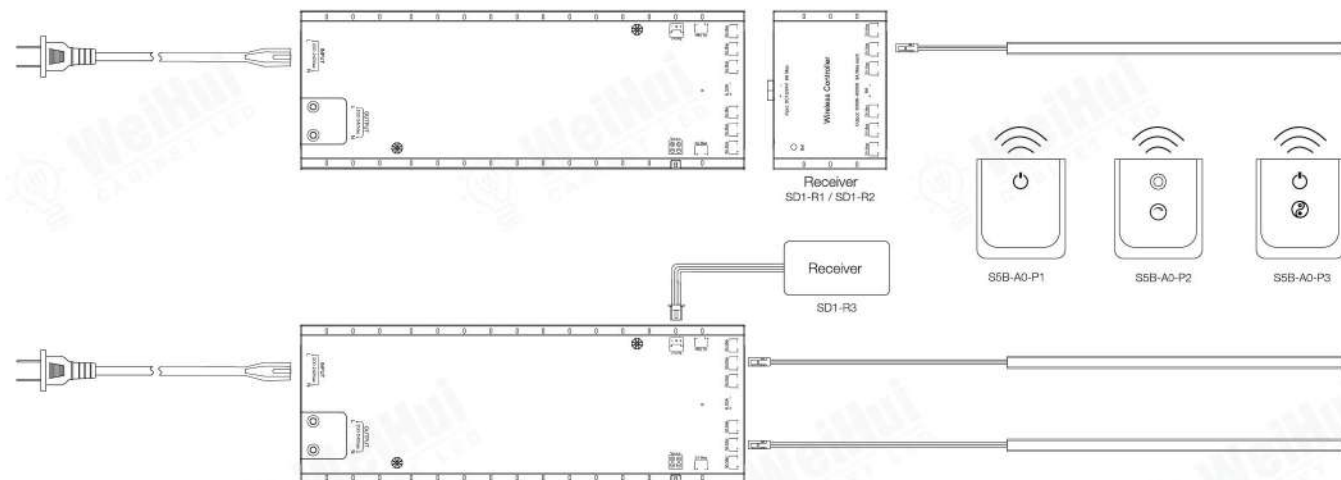

Receiver Part-Wire Connection

S5B-A0-P6



+



CCT Adjusting Wireless Receiver

Connection way	2.4GHz & Tuya
Modulation Mode	GFSK
Working voltage	DC12V/24V, 6A
Max load wattage	72W
Size	76x47x15mm

S5B-A0-P5



+



Single Wireless Receiver

Connection way	2.4GHz & Tuya
Modulation Mode	GFSK
Working voltage	DC12V/24V, 6A
Max load wattage	100W
Size	76x47x15mm

S5B-A0-P4




+




Single Wireless Receiver


Connection way	2.4GHz & Tuya
Modulation mode	GFSK
Working voltage	DC12V/24V, 5A
Max load wattage	60W
Size	47x26x15mm

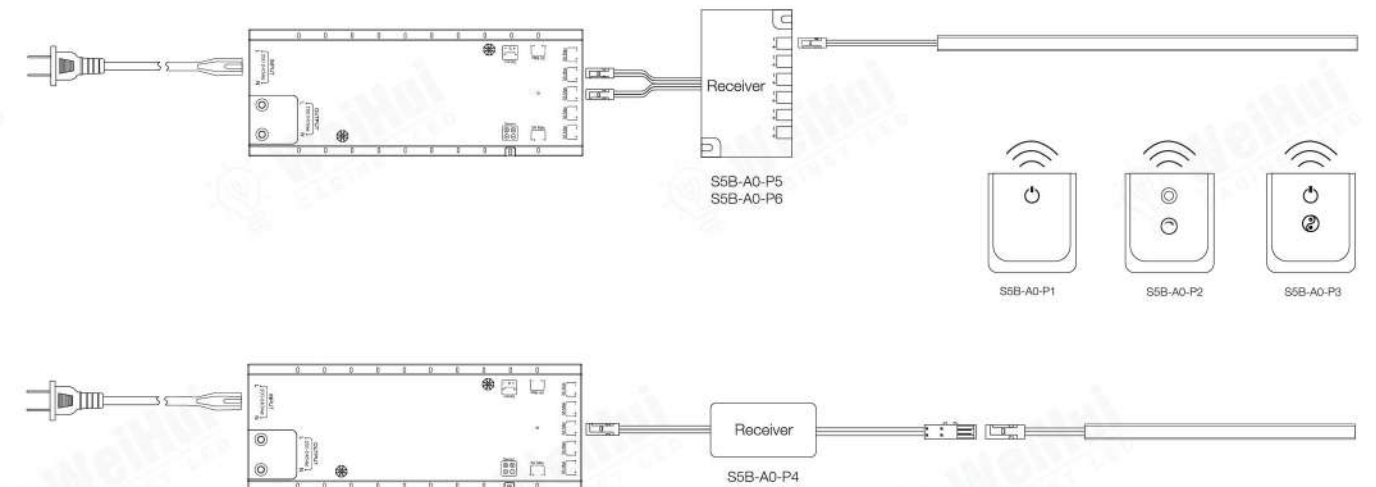

Smart Wireless Remote Control Series (LJ Series)

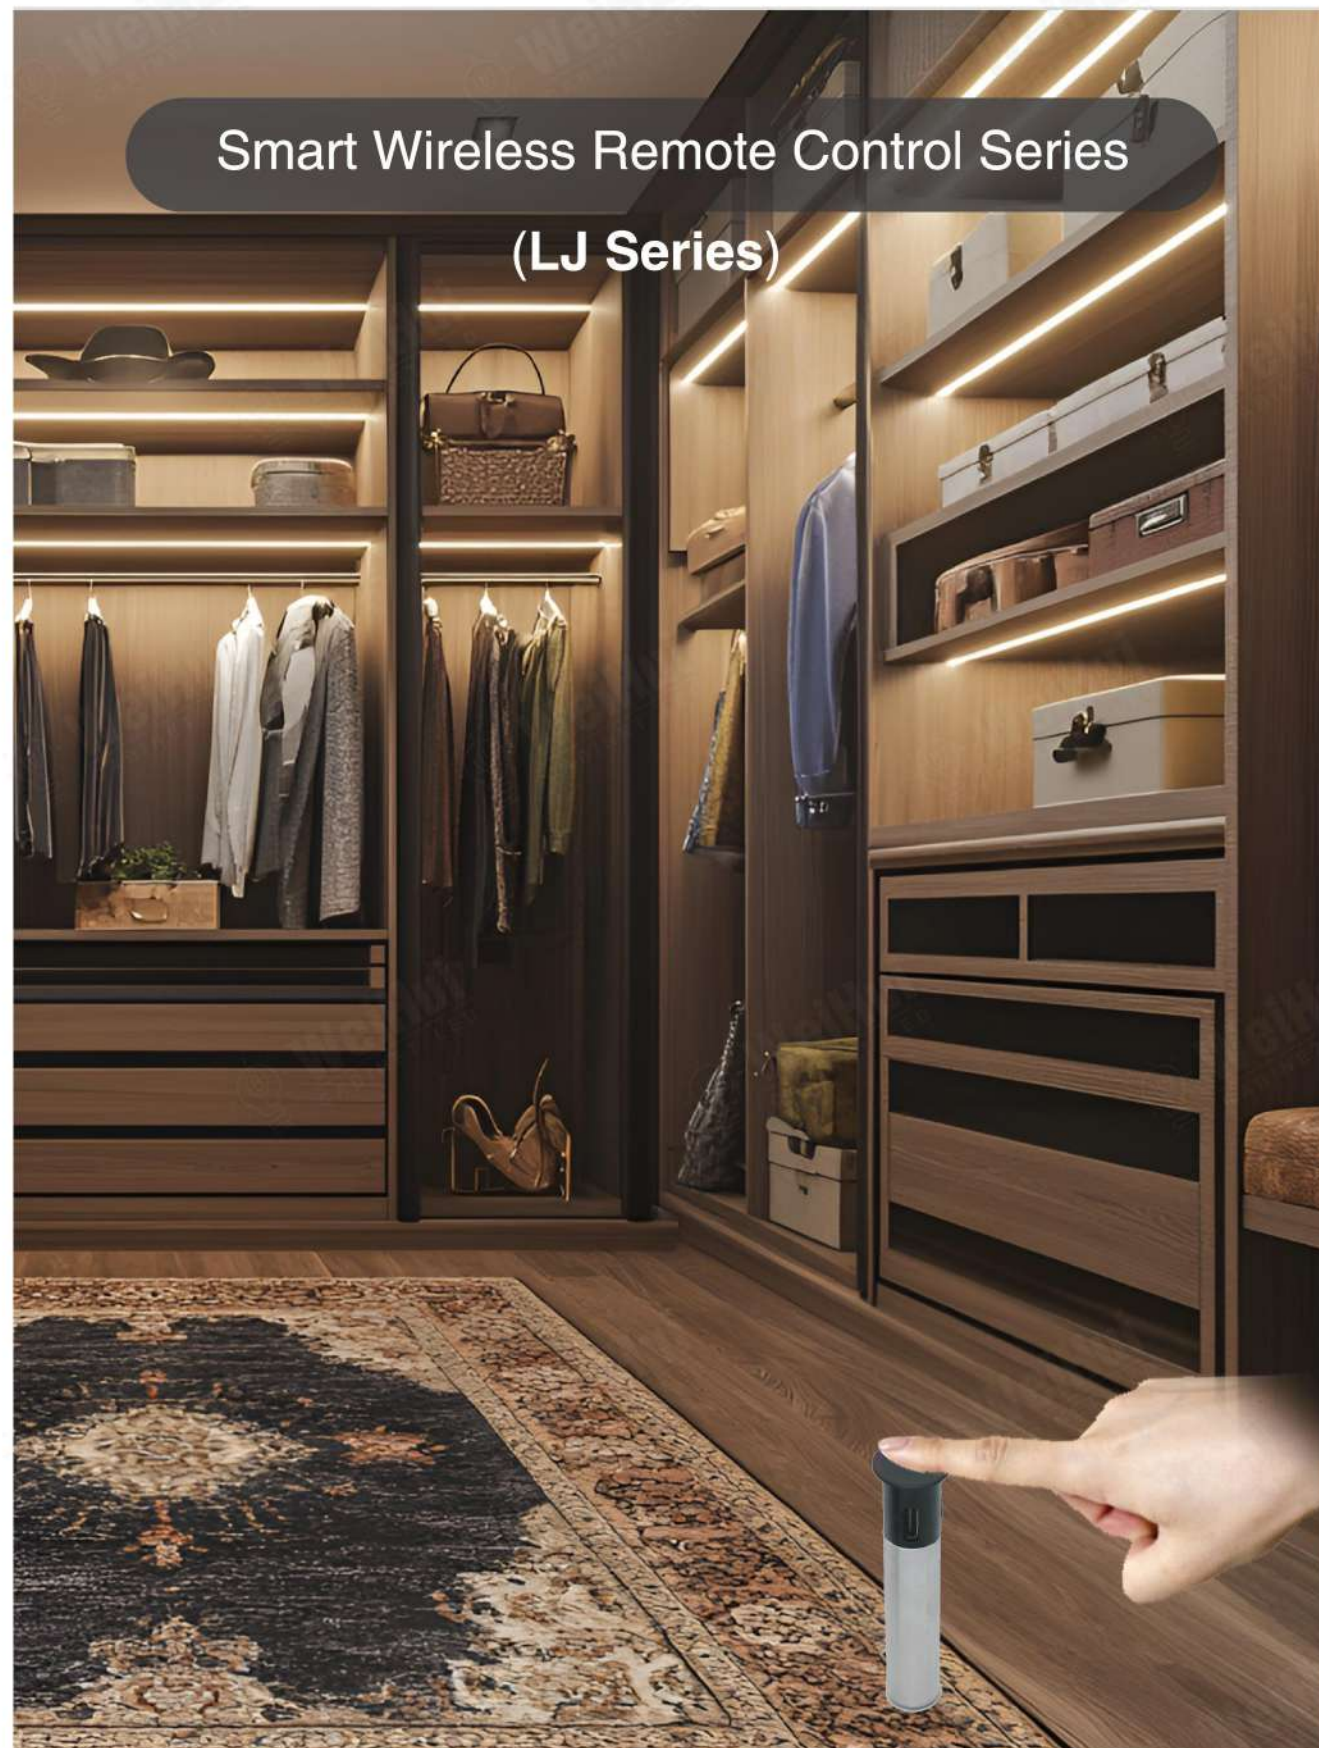


LJ5B-A0-P1 Sender



Wireless Touch Dimmer Sensor Switch

Rechargeable Lithium battery with Type C Output	
Working Voltage	3.7V (200mAH)
Launch Distance	15m (Without barrier)
Size	Φ16x63.2mm
Installation	Recessed / Surfaced
Hole size	Φ12mm


LJ5B-A0-P2 Sender



Wireless Door Sensor & Hand Shaking Sensor

Rechargeable Lithium battery with Type C Output	
Working Voltage	3.7V (200mAH)
Launch Distance	15m (Without barrier)
Size	Φ16x63.2mm
Installation	Recessed / Surfaced
Hole size	Φ12mm

LJ5B-A0-P3 Receiver



Receiver

Working Voltage	DC 12V&24V
Max Wattage	60W
Cable length	100mm (Black)
Size	45x35x7mm
Sender available	LJ5B-A0-P1 / LJ5B-A0-P2

Function of K key button

LJ5B-A0-P1

Short press the K key to switch the function in the touch mode, and it will be indicated by the number of D4 flashes.

Mode 1: Touch on and off, D4 flashes one time.

Mode 2: Short touch to turn on and off, long touch to dim, D4 flashes twice.

LJ5B-A0-P2

Short press the K key to switch between three modes (Hand shaking/Door trigger), and it will be indicated by the number of D4 flashes.

Mode 1: On and off of the hand shaking function, D4 flashes one time.

Mode 2: On and off and dimming of hand shaking function, D4 flashes twice.

Mode 3: Door trigger, D4 flashes three times.

PCBA Sensor Switch Series

(Hand Shaking / Touch Sensor / PIR Sensor)



Hand sweeping sensor-Without Opening Holes-5mm

SP1-3B(0540) Single color
SP1-3D(0540) Dual color-3 Wires



SP1-3B

SP1-3D




CCT

Size 40x5mm
Voltage DC 12&24V, 2.5A
Function Delay ON/OFF in 2S
Detecting Range 5%-100%
Self-adjusting time 6S
Memory function in state and brightness
In OFF state, keep swiping for 3S-CCT change

Hand sweeping sensor-Without Opening Holes-8mm

SP1-3B(0840) Single color
SP1-3D(0840) Dual color-3 Wires



SP1-3B

SP1-3D



CCT

Size 40x8mm
Voltage DC 12&24V, 2.5A
Function Delay ON/OFF in 2S
Detecting Range 5%-100%
Self-adjusting time 6S
Memory function in state and brightness
In OFF state, keep swiping for 3S-CCT change

Touch dimmer sensor-8mm

SP1-4B(0835) Single color
SP1-4D(0835) Dual color-3 Wires



SP1-4B

SP1-4D



CCT

Size 35x8mm
Voltage DC 12&24V, 5A
Function Delay ON/OFF in 2S
Detecting Range 5%-100%
Memory function in state and brightness
In OFF state, keep swiping for 3S- CCT change

PIR Sensor

SP1-6A(0840) Single color




Size 35x10mm
Voltage DC 12&24V, 5A
Function Delay ON/OFF in 2S
Sensing distance 1-3m
Sensing time: 30s-60s-180s-300s for option



01

IR SENSOR SWITCH SERIES (Door Trigger & Hand Shaking)



- White
- Black



Model

SXA-B4

SXA-2B4

Function

Dual Function IR Sensor (Single)

Dual Function IR Sensor (Double)

Size

Φ10x13.8mm

Voltage

DC12V / DC24V

Wattage


60W

Detecting Range


5-8cm

Protection Rating

IP20



Recommended Groove Size: Φ8x20mm



- White
- Black



Model

SXA-A0P

Function

Dual Function IR Sensor

Size

50x33x8mm

Voltage

DC12V / DC24V

Wattage


60W

Detecting Range

5-8cm

Protection Rating

IP20

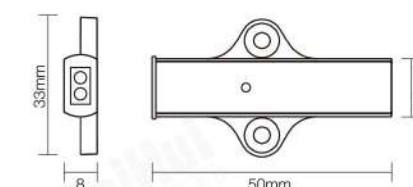




White

Black



Model	S2A-A3	S3A-A3	S2A-2A3	S3A-2A3
Function	Single door trigger	Single hand shaking	Double door trigger	Double hand shaking
Size	30x24x9mm			
Voltage	DC12V / DC24V			
Wattage	60W			
Detecting Range	2-4cm(Door Trigger), 5-8cm (Hand Shaking)			
Protection Rating	IP20			

Screw Mounting




Black



Model	SJ1-D2A
Function	Double door trigger sensor
Size	58x24x10mm
Voltage	DC12V / DC24V
Wattage	60W
Detecting Range	5-8cm
Protection Rating	IP20

Recommended Groove Size: 38x26x8mm

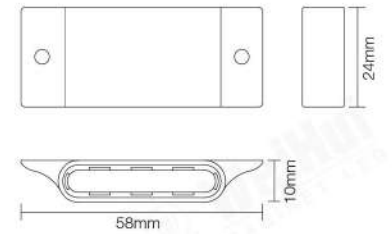


White

Black



Model	S2A-A1	S3A-A1
Function	Door trigger	Hand shaking
Size	Φ16x38mm(Recessed), 40x22x14mm(Clips)	
Voltage	DC12V / DC24V	
Wattage	60W	
Detecting Range	5-8cm	
Protection Rating	IP20	

Recommended Groove Size: Φ14x40mm

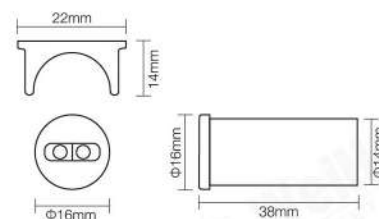


Silver



Model	S2A-A0
Function	Door trigger sensor
Size	38x15x7mm
Voltage	DC12V / DC24V
Wattage	60W
Detecting Range	5-8cm
Protection Rating	IP20

3M Sticker



02

TOUCH SENSOR SWITCH SERIES




- Chrome
- Black



Model	S4B-A0P1	S4B-2A0P1
Function	ON/OFF/Dimmer (Single)	ON/OFF/Dimmer (Double)
Size	Φ20x13.2mm	
Voltage	DC12V / DC24V	
Wattage	60W	
Detecting Way	Touch type	
Protection Rating	IP20	

Recommended Groove Size: Φ17.2x15mm




- Gray



Model	S4B-A2	S4B-2A2
Function	ON/OFF/Dimmer (Single)	ON/OFF/Dimmer (Double)
Size	Φ12x15mm	
Voltage	DC12V / DC24V	
Wattage	60W	
Detecting Way	Touch type	
Protection Rating	IP20	

Metal finish
Recommended Groove Size: Φ10x15mm






Golden



Model	S4B-A3
Function	ON/OFF/Dimmer
Size	22x10mm
Voltage	DC12V / DC24V
Wattage	60W
Detecting Way	Press type
Protection Rating	IP20

3M Sticker


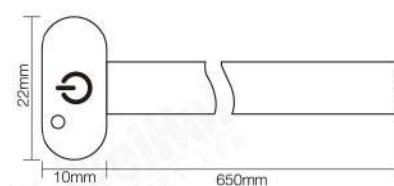


Aluminum



Model	S4B-A5	S4B-2A5
Function	Dimmer with Three Level	
Size	Φ20x13.2mm	
Voltage	DC12V / DC24V	
Wattage	60W	
Detecting Way	Touch type	
Protection Rating	IP20	

Screw Mounting

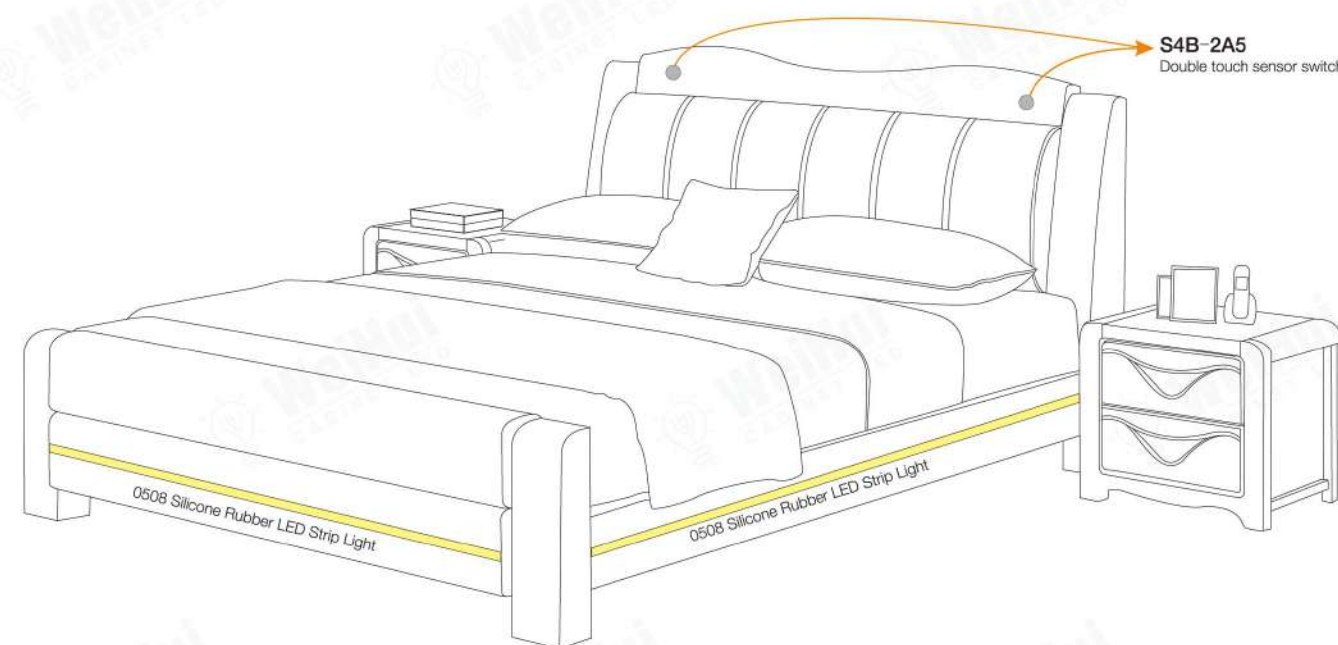

03

PIR SENSOR SWITCH SERIES





- White
- Black



Model	S6A-A0
Function	PIR Sensor
Size	Φ16x38mm(Recessed), 40x22x14mm(Clips)
Voltage	DC12V / DC24V
Max Wattage	60W
Detecting Range	1-3m
Protection Rating	IP20

Recommended Groove Size: Φ14x40mm





- White
- Black



Model	S6A-A1	S6A-2A1
Function	Single PIR Sensor	Double PIR Sensor
Size	Φ14x15mm(Recessed), 13x10x10mm(Clips)	
Voltage	DC12V / DC24V	
Wattage	60W	
Detecting Range	1-3m	
Protection Rating	IP20	

Recommended Groove Size: Φ12x15mm



04

MIRROR SWITCH SERIES




Black



Model	S7B-A1	S7D-A1
Function	ON/OFF/Dimmer	ON/OFF/Dimmer/CCT Change
Size	50x33x10mm, 57x46x4mm(Clips)	
Voltage	DC12V / DC24V	
Max Wattage	60W	
Detecting Way	Touch type	
Protection Rating	IP20	

Indicator LED: ON-Blue, OFF-Red

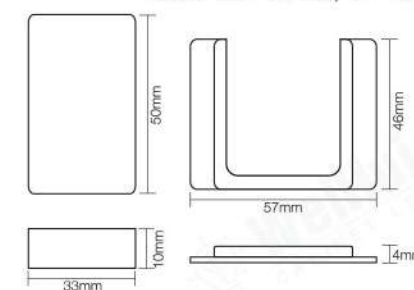


Black



To Anti-Fog Foil

Model	S7B-A3	S7D-A3
Function	ON/OFF/Dimmer	ON/OFF/Dimmer/CCT Change
Size	93x35x10mm, 88x62x6mm(Clips)	
Voltage	DC12V / DC24V	
Max Wattage	60W	
Detecting Way	Touch type	
Protection Rating	IP20	

Indicator LED: ON-Blue, OFF-Red

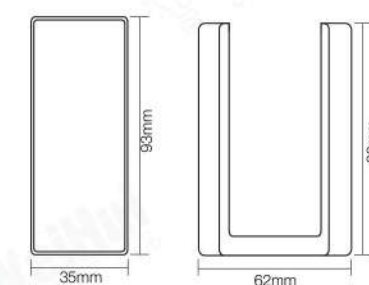




Black



Model	S7B-A5P	S7D-A5P
Function	ON/OFF/Gesture Sensor	ON/OFF/Gesture Sensor /CCT Change
Size	50x33x10mm, 57x46x4mm(Clips)	
Voltage	DC12V / DC24V	
Max Wattage	60W	
Detecting Range	5-8cm	
Protection Rating	IP20	

Indicator LED: ON-Blue, OFF-White

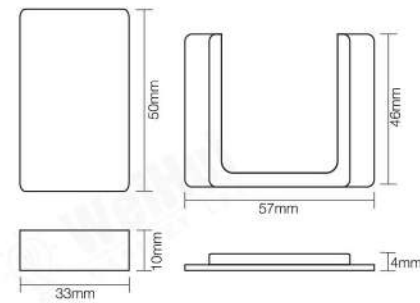


Black



Model	S7B-A7	S7D-A7
Function	ON/OFF/Dimmer	ON/OFF/Dimmer/CCT Change
Size	93x35x10mm, 88x62x6mm(Clips)	
Voltage	DC12V / DC24V	
Max Wattage	60W	
Detecting Way	Touch type	
Protection Rating	IP20	

Indicator LED: ON-Blue, OFF-White

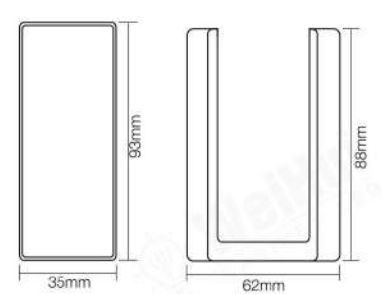


Black



Model	S7A-A6P
Function	Rader Sensor
Size	50x33x10mm, 57x46x4mm(Clips)
Voltage	DC12V / DC24V
Max Wattage	60W
Detecting Range	1-3m
Protection Rating	IP20

Indicator LED: ON-Blue, OFF-White

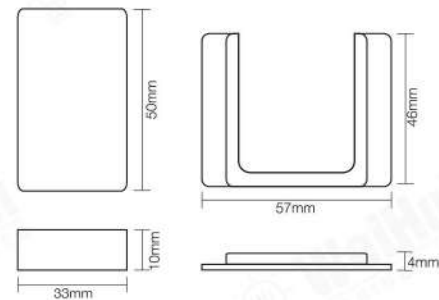

05

HIDDEN SENSOR SWITCH SERIES



Black



Model

S8B4-A0

S8D4-A0

Function

ON/OFF/Dimmer

ON/OFF/Dimmer/CCT Change

Size

50x33x10mm, 57x46x4mm(Clips)

Voltage

DC12V / DC24V

Max Wattage


60W

Detecting Range

Wood panel thickness ≤ 20mm

Protection Rating

IP20

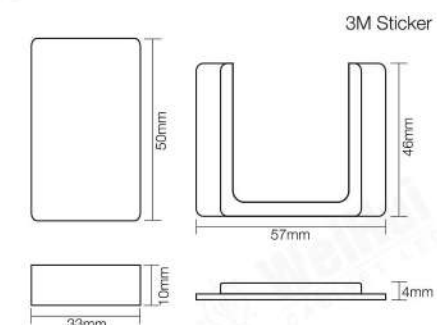

Grey



Model

S8B4-A1 / S8B4-2A1

S8A3-A1 / S8A3-2A1

Function

Single / Double hidden touch dimmer sensor

Single / Double hidden hand shaking sensor

Size

50x50x6mm

Voltage

DC12V / DC24V

Wattage


60W

Detecting Range

Wood Panel thickness ≤ 25mm

Protection Rating

IP20




06

MECHANICAL SWITCH SERIES

- White
- Black



Model	S1A-A0
Switch Mode	Rocker Switch
Function	ON / OFF
Size	61x19x16mm
Voltage	DC12V / DC24V
Wattage	60W
Protection Rating	IP20




- White
- Black



Model	S1A-A1
Switch Mode	Roud Mechanical Switch
Function	ON / OFF
Size	Φ23x16mm
Voltage	DC12V / DC24V
Wattage	60W
Protection Rating	IP20


Recommended Groove Size: Φ20x16mm



○ White
● Black



Model	S1A-A2
Switch Mode	Poot Switch
Function	ON / OFF
Size	Φ70x30mm
Voltage	DC12V / DC24V
Wattage	60W
Protection Rating	IP20




○ White
● Black



Model	S1A-A4
Switch Mode	Mechanical Door Switch
Function	Door open / Closed
Size	Φ15x33mm
Voltage	DC12V / DC24V
Wattage	60W
Protection Rating	IP20


Recommended Groove Size: Φ12x35mm



○ White
● Black



Model	S1A-A3
Switch Mode	Mechanical Door Switch
Function	Door open / Closed
Size	52x50x18mm
Voltage	DC12V / DC24V
Wattage	60W
Protection Rating	IP20

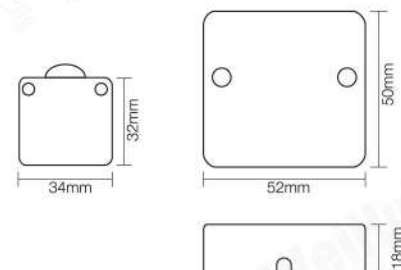

● Chrome



Model	S1A-A5
Switch Mode	Roud Mechanical Switch
Function	ON / OFF
Size	Φ18.8x25.3mm
Voltage	DC12V / DC24V
Wattage	60W
Protection Rating	IP20

Recommended Groove Size: Φ16x25mm




B

LED Light Series

- ★ LED Welding-Free Strip Lights
- ★ All Black Strip Lights

- 01 LED Under Cabinet Lights
- 02 LED Drawer Lights
- 03 LED Wardrobe Lights
- 04 LED Shelf Lights
- 05 Anti-Glare Strip Lights
- 06 Battery Cabinet Lights
- 07 LED Panel Lights
- 08 LED Puck Lights
- 09 Jewelry Lights

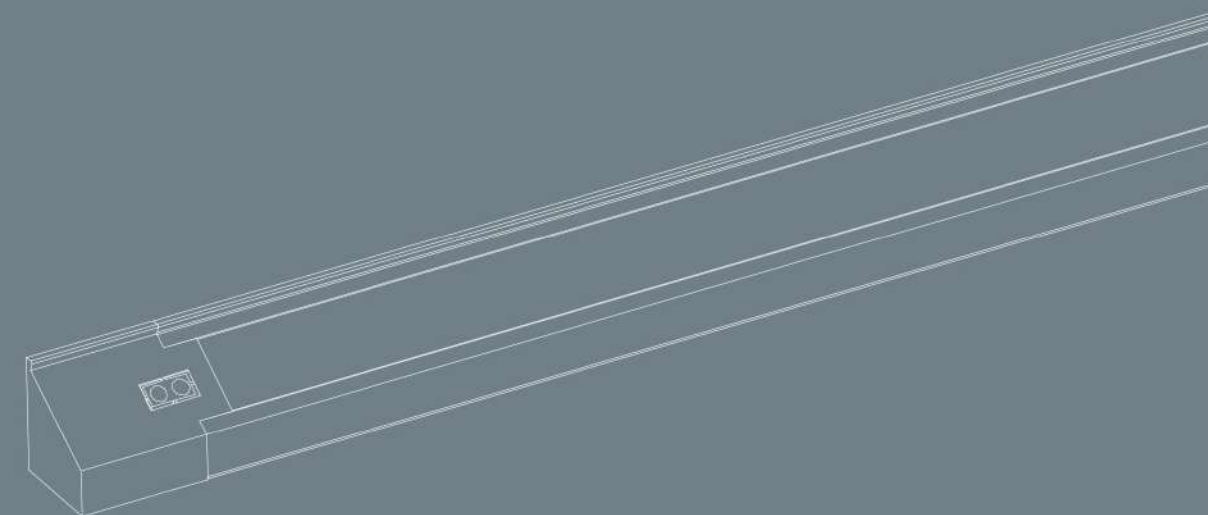



LED Welding-Free Strip Light (A series)



FEATURES

- Recessed mounting, suitable for all wood panels.
- Flat and tilt shining direction available. (left and right both)
- Separate cables from light body, easy after service.
- Available for cutting in any length. Reconnect without soldering.
- Soft and even lighting effect, good for eyes.



MH01A





Recommended Groove Size:
Length(-8)*10mm(width)*10mm(depth)

MH08A



Recommended Groove Size:
Length(-8)*10mm(width)*10mm(depth)

INSTALLATION

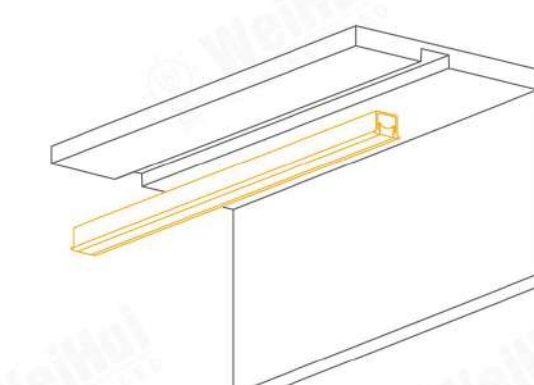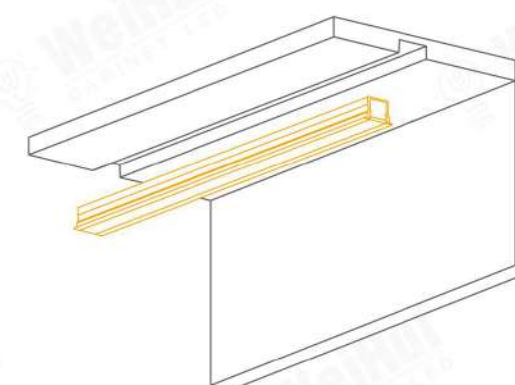

TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
MH01A	12VDC	10W/m	SMD2216	150pcs/m	>90
MH08A	12VDC	10W/m	SMD2216	150pcs/m	>90

FEATURES


- Separate cables from light body, easy after service.
- Available for cutting in any length. Reconnect without soldering.
- Available for the wood panel thickness~16mm&18 mm.
- Suitable for the back side of wood panel.
- Up and down lighting direction makes your furniture elegant and fashionable.





MH02A



MH06A

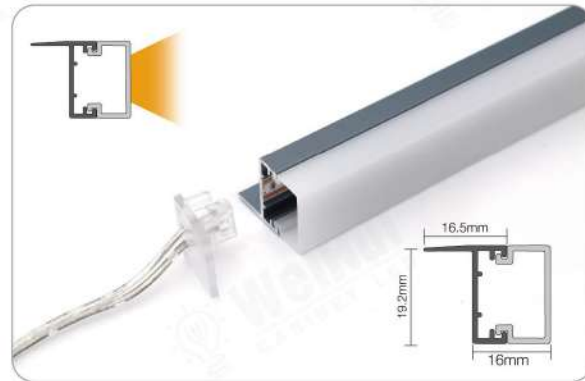

INSTALLATION

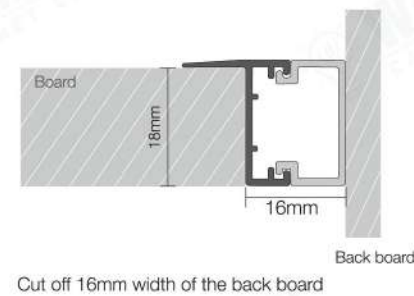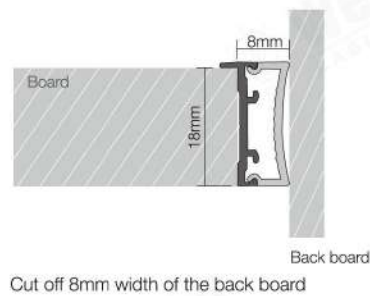


TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
MH02A	12VDC	10W/m	SMD2216	150pcs/m	>90
MH06A	12VDC	10W/m	SMD2216	150pcs/m	>90

FEATURES


- Lighting in three different directions, suitable for 6-8mm thickness glass shelf.
- Separate cables from light body, easy after service.
- Available for cutting in any length. Reconnect without soldering.
- Lighting effect soft and even.

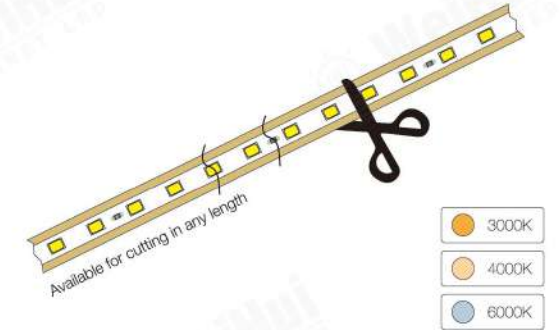



MH03A



MH07A

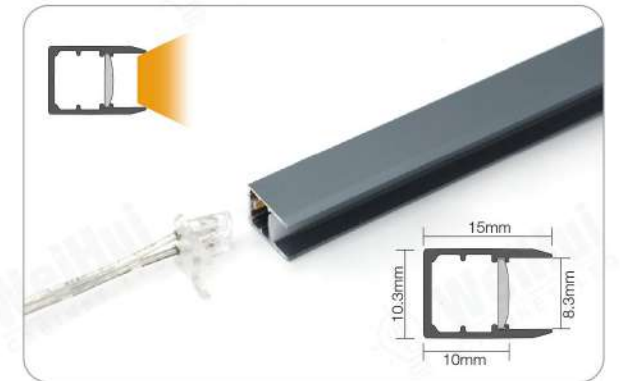

INSTALLATION

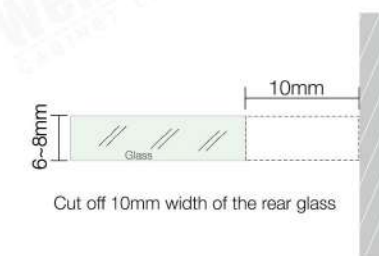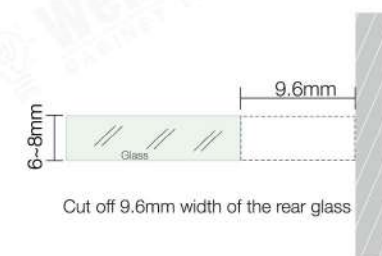


TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
MH03A	12VDC	10W/m	SMD2216	150pcs/m	>90
MH07A	12VDC	10W/m	SMD2216	150pcs/m	>90

FEATURES

- Separate cables from light body, easy after service.
- Available for cutting in any length. Reconnect without soldering.
- Surfaced mounting, easy to install.
- Suitable for any furniture or cabinet surface, wide application.

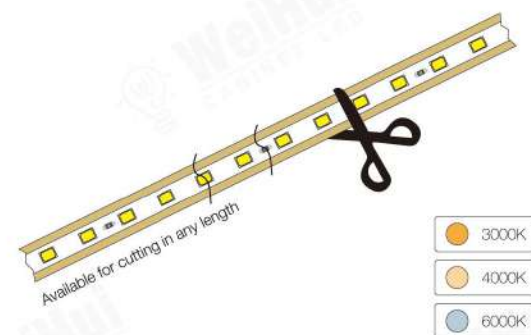


MH04A



MH05A



INSTALLATION

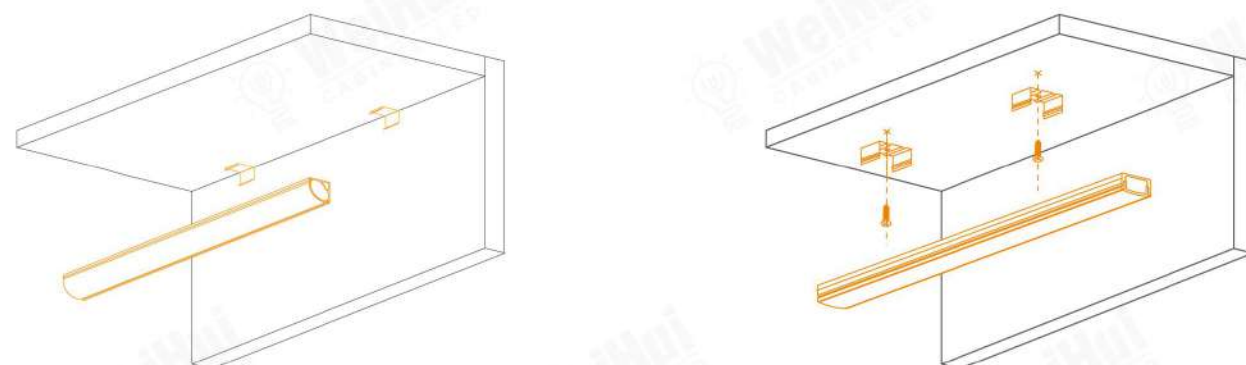

TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
MH04A	12VDC	10W/m	SMD2216	150pcs/m	>90
MH05A	12VDC	10W/m	SMD2216	150pcs/m	>90



LED Welding-Free Strip Light (B series)

No polarity difference,
You can connect in both sides


Available for cutting in any length

All series use the same cables



FEATURES

- Cutting Free everywhere
- Reconnect Whole series with ONLY ONE type quick end caps
- Golden Strip light surface, More stable for stock and connection
- No Polarity difference, Connect two ends freely.
- 3000mm Length for delivery, Save cost and custom-made easily
- Recessed installation, With small size.



MH01B






MH02B



MH03B



INSTALLATION

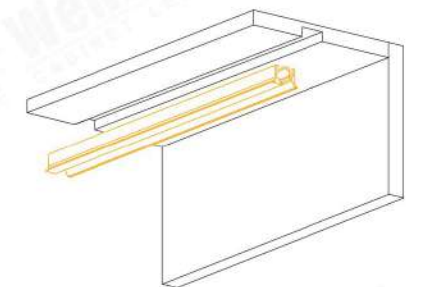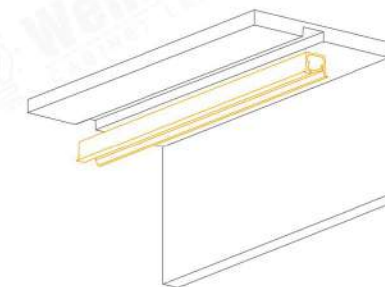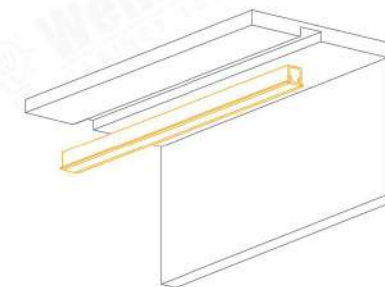

I&L-Type Quick-Connect Terminal (Direct Connection)

MH05A



B Series



B Series




TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
MH01B	12VDC	10W/m	SMD2015	152pcs/m	>90
MH02B	12VDC	10W/m	SMD2015	152pcs/m	>90
MH03B	12VDC	10W/m	SMD2015	152pcs/m	>90

FEATURES

- Cutting Free everywhere
- Reconnect Whole series with ONLY ONE type quick end caps
- Golden Strip light surface, More stable for stock and connection
- No Polarity difference, Connect two ends freely.
- 3000mm Length for delivery, Save cost and custom-made easily
- Wooden shelf series, Many applications available



MH04B



MH05B



MH06B



INSTALLATION





TECHNICAL DATA



Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
MH04B	12VDC	10W/m	SMD2015	152pcs/m	>90
MH05B	12VDC	10W/m	SMD2015	152pcs/m	>90
MH06B	12VDC	10W/m	SMD2015	152pcs/m	>90




MH07B Base cabinet handle-free light

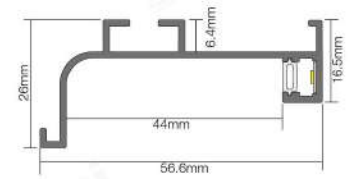


MH08B Middle cabinet handle-free light

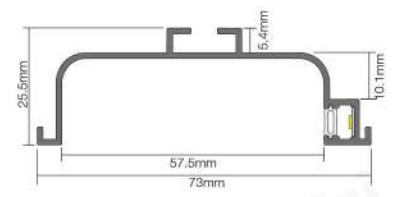



MH09B Gola series LED strip light



MH10B Gola series LED strip light



MH11B Skirting light



LED Welding-Free Strip Light (built in sensor)



FEATURES


- Golden cover LED strip light, cutting free everywhere.
- No polarity difference, you can connect in both sides without soldering.
- Three meters length available, easy to customize in oversea Market.
- Three different types-Door trigger/ Hand shaking/ PIR sensors, etc, cover most of applications.
- All types of lighting effect soft and even without dots.



MH09A-L3B / MH09A-L6A
12V(152D)&24V(200D)-10W-CRI>90



MH10A-L3B / MH10A-L6A
12V(152D)&24V(200D)-10W-CRI>90



LD1-L2A LED Strip Light (Door trigger sensor)
12V(152D)&24V(200D)-10W-CRI>90



LED Welding-Free Strip Light-Neon Series



FEATURES

- Creative design, simple and fast installation, elegant lighting source.
- LED strip and silicone rubber extrusion together.
- 180 degree bent, able to variety of shapes.
- Extremely small size, 5mm width, 8mm depth only.
- Cutting Free in any place, quick connectors to reconnect without soldering.
- Surface clips for installation, Surface clips for end caps.




Available for cutting in any length

FG0508-1:
12V-2835-168LED-W5




FG1008-2:
12V-2835-148LED-W8




Reconnecting by end caps without Soldering
Pay attention to Polarity +/-

INSTALLATION

Recessed mounting

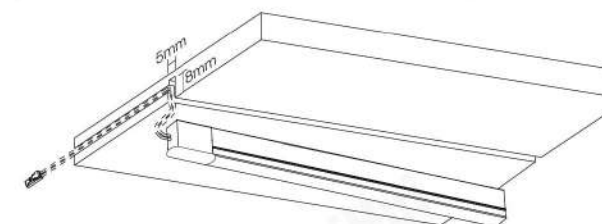


Surfaced mounting

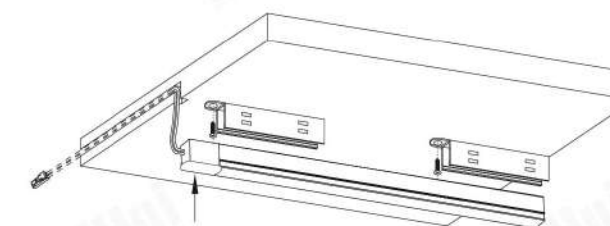

TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
FG0508-1	12VDC	9W/m	SMD2835	168pcs/m	>90
FG01008-2	12VDC	9W/m	SMD2835	148pcs/m	>90

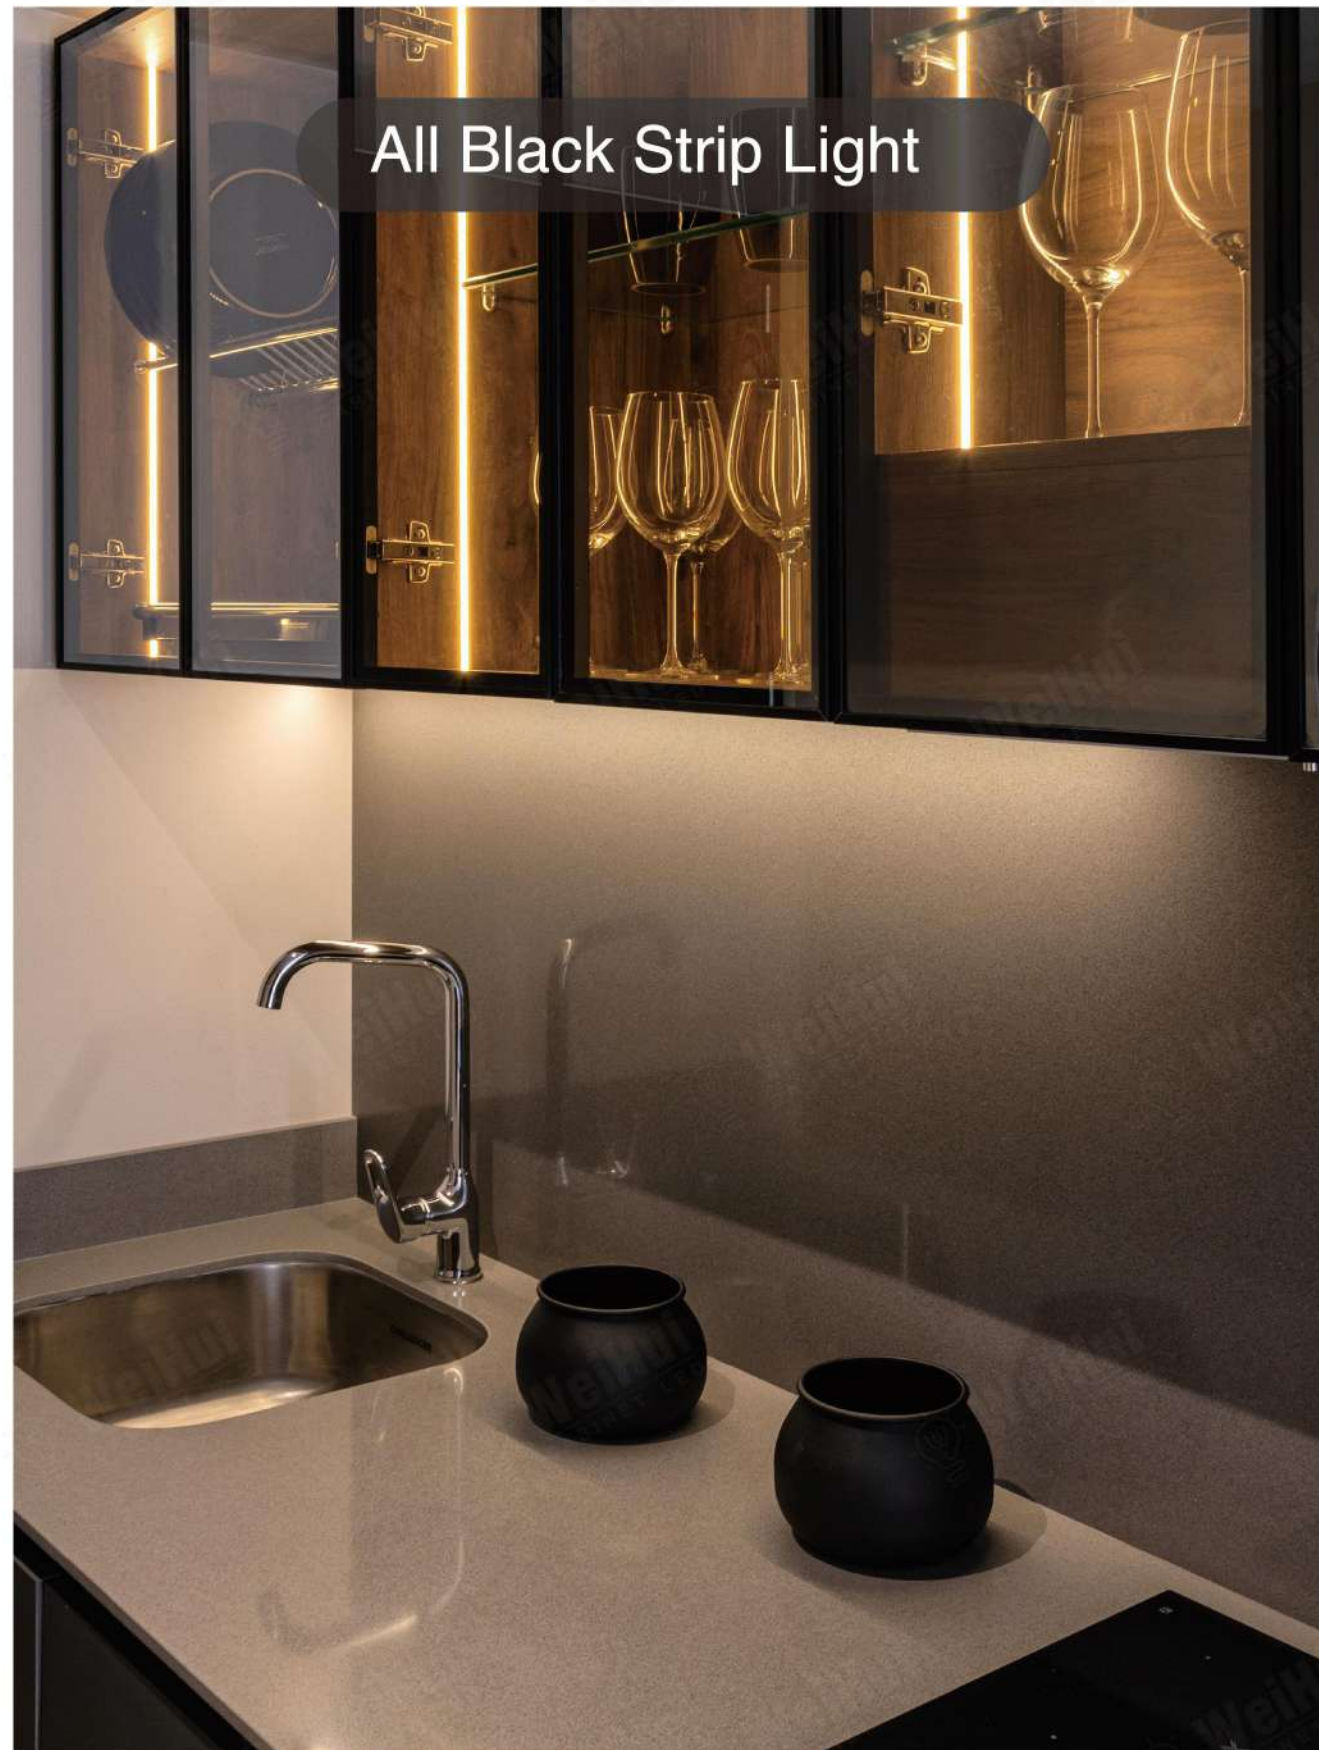


All Black Strip Light

FEATURES

- All black shape, elegant and luxury.
- COB LED strip light, without any dots in the surface.
- Ultra thin recessed mounting / Surfaced mounting / Corner use.



INSTALLATION

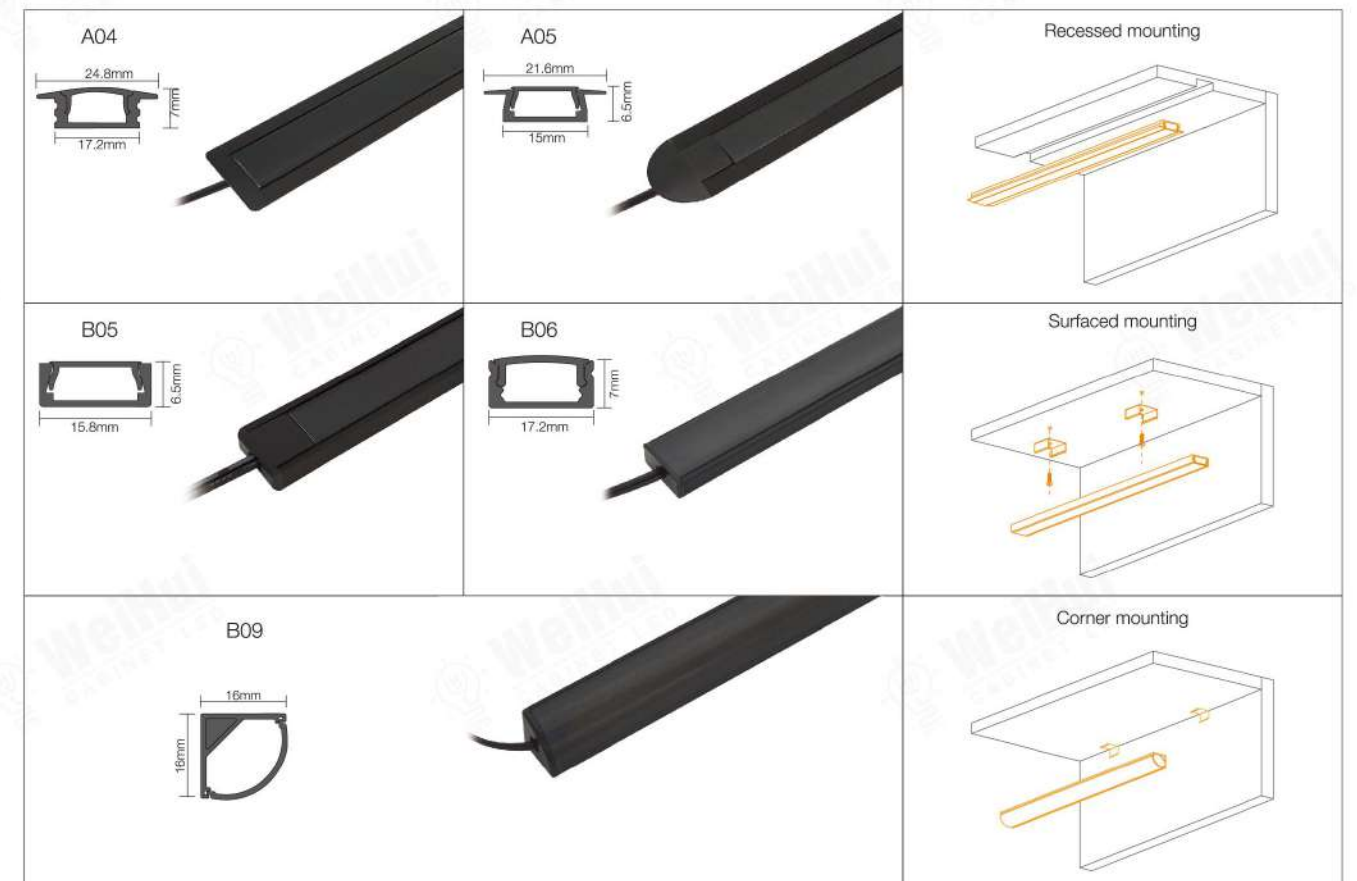

TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
A04 / A05	12VDC	10W/m	COB	320pcs/m	>90
B05 / B06					
B09					




01

LED UNDER CABINET LIGHT



FEATURES

- The surface light source design makes the light more comfortable and less dazzling.
- Hand shaking sensor switch avoid to touch the lamps frequently and keep it tidy.
- Separate cable from light body, very convenient for after-service.

● Silver



INSTALLATION

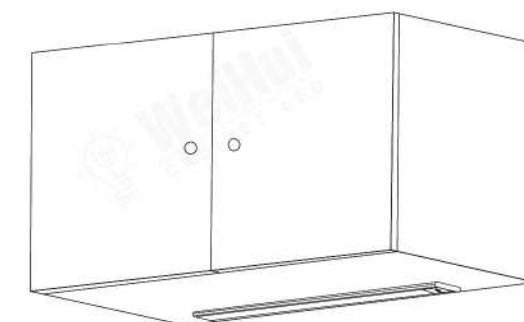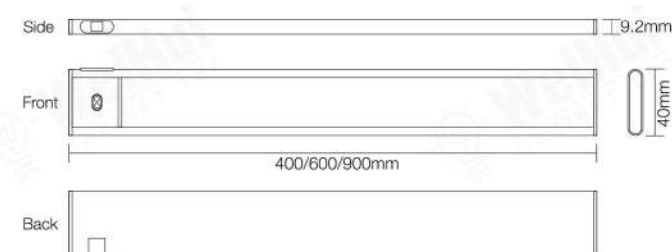

TECHNICAL DATA


Model	Size	Input Voltage	Wattage	LED Type	CRI
GD01.400	400x40x9.2mm	12VDC	2.5W	SMD4014	>90
GD01.600	600x40x9.2mm		4W		
GD01.900	900x40x9.2mm		6W		





FEATURES

- Two rows led beams makes light bright.
- Hand shaking sensor switch avoid to touch the lamps frequently and keep it tidy.
- Built in blue indicator SMD, when the lamp off, the indicator on. You can find the light in the night easily.

● Silver



INSTALLATION

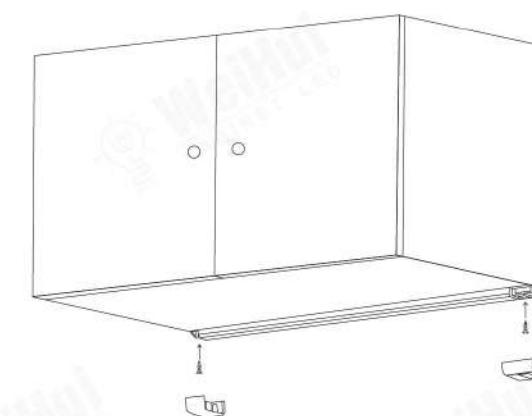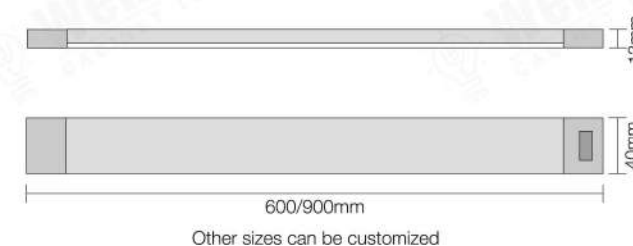

TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
GD02	12VDC	3 X 5W/m	SMD2835	120pcs/m	>90


02

LED DRAWER LIGHTS

FEATURES


- Door trigger sensor switch, drawer or Inside cabinet application place.
- Single or double door sensor switches available both.
- Lighting direction to front and down side both.

● Silver



- 3000K
- 4000K
- 6000K

INSTALLATION



TECHNICAL DATA


Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
D01	12VDC	10W/m	COB	320pcs/m	>90





FEATURES

- The surface light source design makes the light more comfortable and less dazzling.
- One / Two rows of led beams for choose.
- Door trigger sensor switch (Double door sensor switch available).

● Silver



INSTALLATION

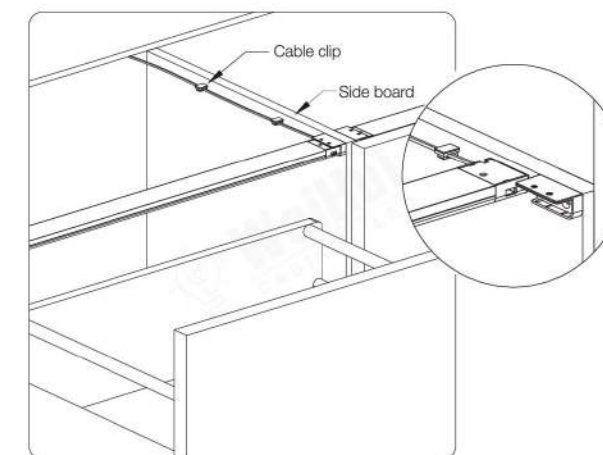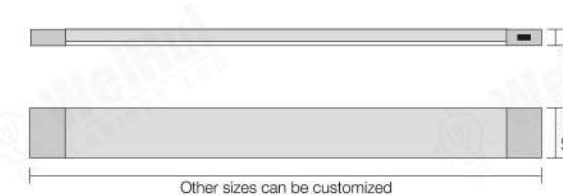

TECHNICAL DATA


Model	Function	Voltage	Wattage	LED Type	LED Quantity	CRI
D02-D2A	Double door sensor	12VDC	5W	SMD2835	120pcs/m	>90
D02-L2A	Left door sensor					
D02-R2A	Right door sensor					



FEATURES

- Separate cable from light body, Very convenient for after-service.
- Multi sensor installation places choice, Many application available.
- Side and Top mounting both available, Easy to installation.

- Silver
- Black



INSTALLATION

D01A-1



D01A-2



D01A-3



TECHNICAL DATA

Model	Function	Voltage	Wattage	LED Type	LED Quantity	CRI
D01A	No sensor	12VDC	10W/m	COB	320pcs/m	>90
D01A-1.R2A	Right door sensor					
D01A-2.R3A	Right hand sensor					
D01A-3.D2A	Double door sensor					
D01A-3.L2A	Left door sensor					
D01A-3.R2A	Right door sensor					

03

LED WARDROBE LIGHTS

FEATURES

- Side panel mounting, custom-made length.
- 12VDC & battery power supply both.
- PIR sensor switches.

- Champagne
- Black



E05




E05A




- 3000K
- 4000K
- 6000K

INSTALLATION



E05



E05A



TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
E05	12VDC	10W/m	COB	120pcs/m	>90
E5A	12VDC	10W/m	COB	120pcs/m	>90



FEATURES

- Top and side mounting available, custom-made length
- 12V & Battery power supply both, rechargeable lithium battery runs long time
- PIR sensor switch

- Champagne
- Black




- 3000K
- 4000K
- 6000K


INSTALLATION



Top Installation

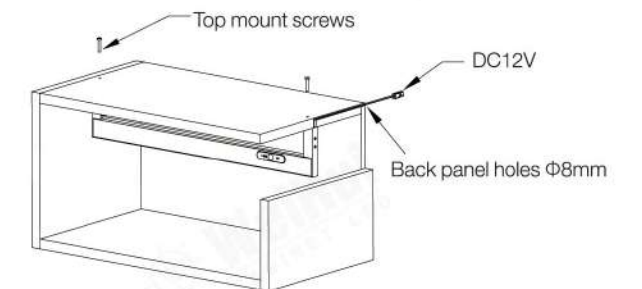

Side Installation

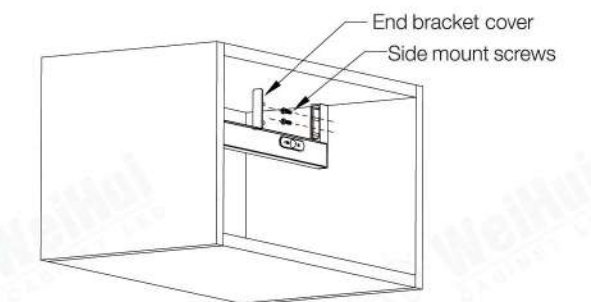

TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
E06	12VDC	10W/m	COB	320pcs/m	>90
	5VDC	1.5W/m	SMD2835	120pcs/m	>90



04

LED SHELF LIGHT



FEATURES

- F01C down direction shining, F01D up and down two direction shining.
- Hand shaking and touch switch for choice.
- Handle free design.
- Suitable 18mm thickness wood panel.

- Silver
- Black



INSTALLATION

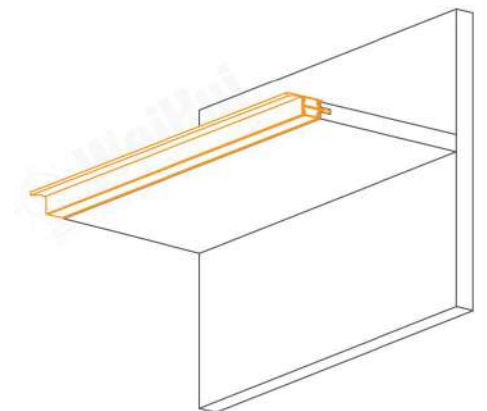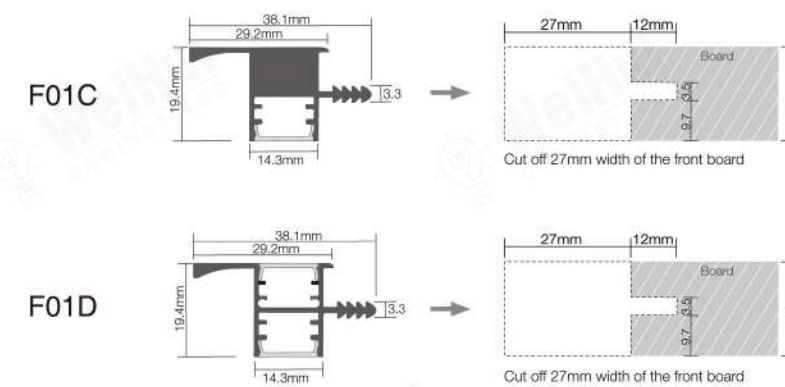

TECHNICAL DATA


Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
F01C	12VDC	10W/m	COB	120pcs/m	>90
F01D	12VDC	2x10W/m	COB	320pcs/m	>90






FEATURES

- Free handle design with curvy surface, comfortable using
- With anti-collision strips to avoid scratching the surface
- Suitable for 18mm thick board

- Silver
- Black



INSTALLATION

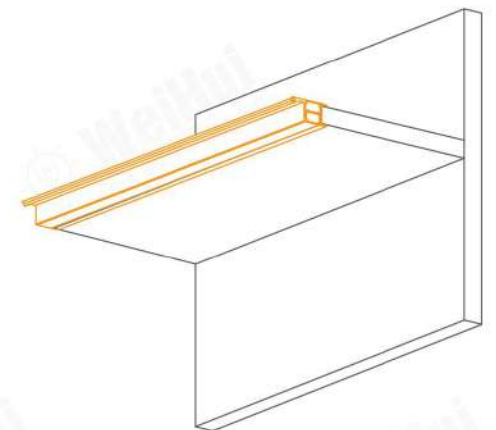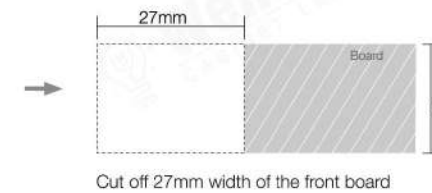

TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
F02	12VDC	2x10W/m	COB	320pcs/m	>90





FEATURES

- Up and down two direction shining.
- 3M tape mounting, easy installation.
- Suitable 16~25mm wood shelf thickness.
- Custom-made length.


● Silver



INSTALLATION

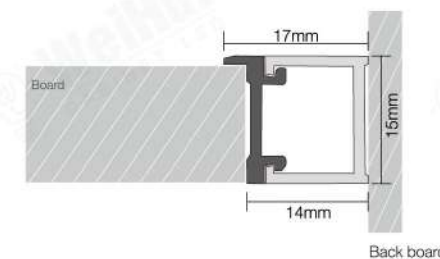

Cut off 14mm width of the back board

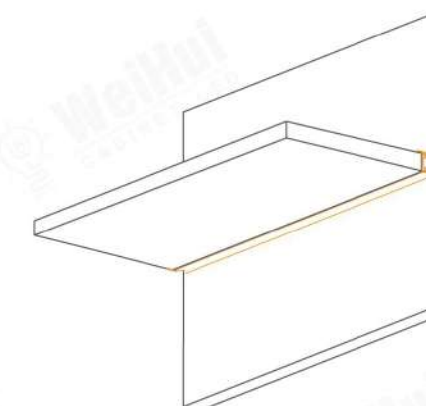

TECHNICAL DATA



Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
F04	12VDC	10W/m	COB	320pcs/m	>90





FEATURES

- Lighting in three different directions.
- Single or RGB Colors.
- Suitable for 6-8mm thickness glass shelf.
- Lighting effect soft and even.

● Silver



INSTALLATION

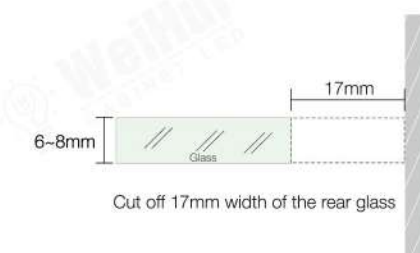

TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
G02	12VDC	10W/m	COB	320pcs/m	>90


05

ANTI-GLARE STRIP LIGHTS

FEATURES



- Ultra thin recessed led strip light.
- Inside shining direction without seeing light body.
- COF strip light, perfect lighting effect.
- Different finish color for option.

Gray



INSTALLATION

Recommended Groove Size: Length(-5)*18mm(width)*8.5mm(depth)

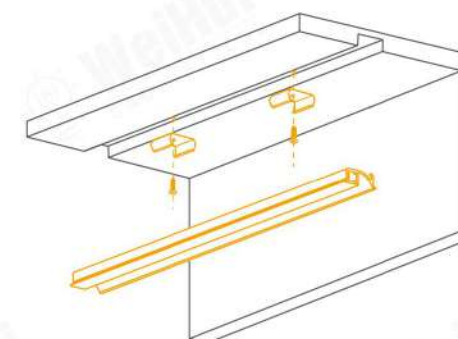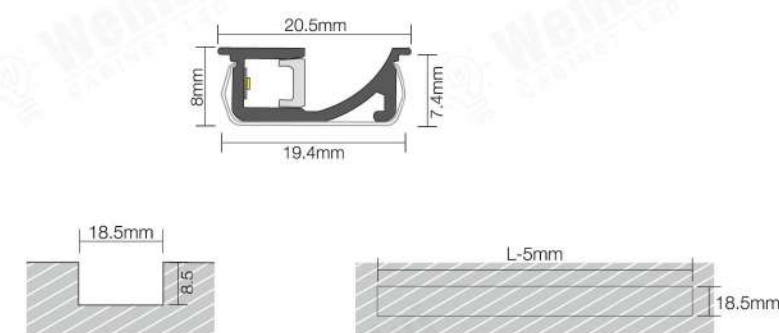

TECHNICAL DATA


Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
A01A	12VDC	6W/m	SMD2835	120pcs/m	>90



FEATURES

- 3M tape and screw mounting for option.
- Easy self-cut with two cables in the ends.
- Corner installation available, Inside shining direction, soft and even.


● Black



INSTALLATION



Installation: 3M tape

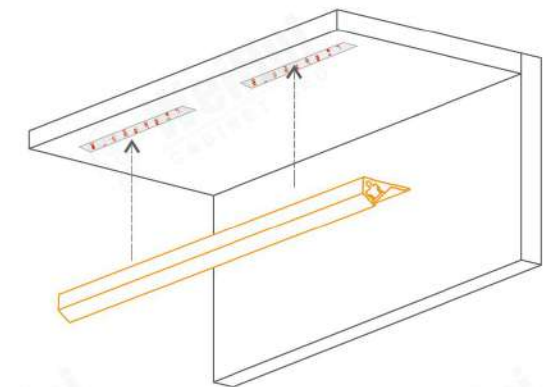

TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
B01	12VDC	6W/m	SMD2835	120pcs/m	>90



06

BATTERY CABINET LIGHTS



FEATURES

- Big battery capacity.
- Switch mode: PIR + Lux + Dimmer sensor.
- Color change and dimmer function both, end users can adjust.
- Magnetic installation, easy charging, Type-C.

● Silver



INSTALLATION

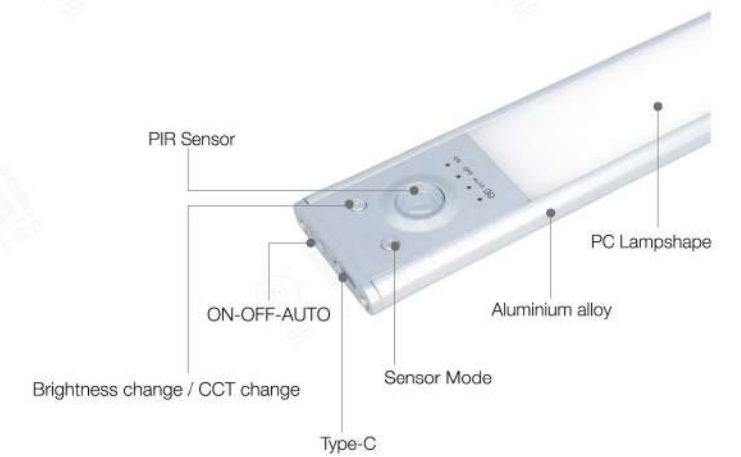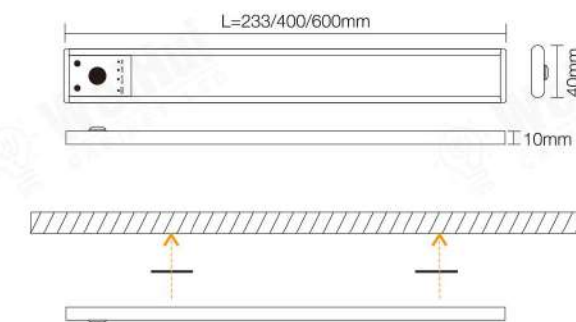

TECHNICAL DATA

Model	Size	Function	Voltage	Wattage	Battery Capacity	CRI
C01.220	233X40X10mm	PIR Sensor	5VDC	1.2W	600mAh	>90
C01.400	400X40X10mm			1.6W	1000mAh	
C01.600	600X40X10mm			2W	1500mAh	


07

LED PANEL LIGHTS

FEATURES



- Ultra thin design, only about 5mm thickness.
- Equal lighting effect without any dark dots.
- 3M tape mounting, easy to install.
- Different size available, such as 100x100/200.etc.

- Silver
- Black



- 3000K
- 4000K
- 6000K

INSTALLATION

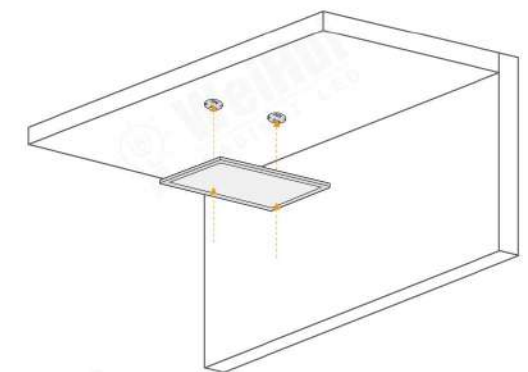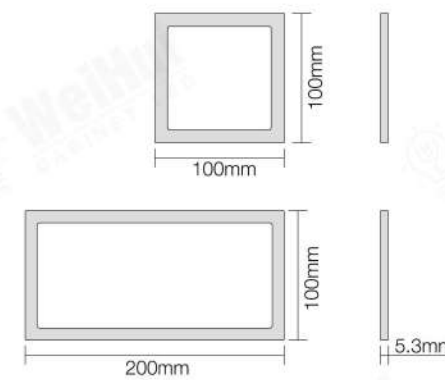

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
H03.100	12VDC	3.5W	SMD4014	15pcs	>90
H03.200	12VDC	7W	SMD4014	30pcs	>90

08

LED PUCK LIGHTS

FEATURES



- Ultra thin-only 12mm thickness.
- Aluminum material-fast heat dissipation.
- Easy installation by screws.

- Silver
- Black



- 3000K
- 4000K
- 6000K

INSTALLATION

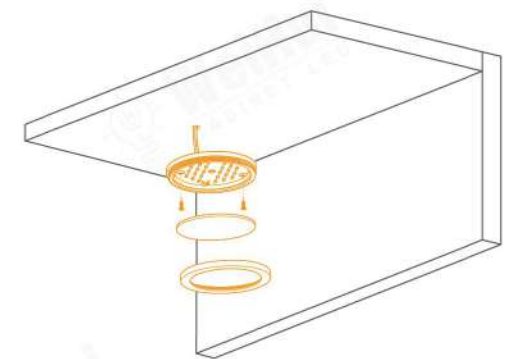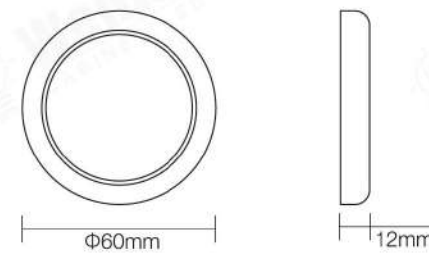


TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
IM01	12VDC	2W	SMD2835	12pcs	>90


FEATURES

- Lightig source soft and even.
- Magnetic and 3M tape mounting, easy and tight.
- Competitive price with reliable quality.

● Silver



INSTALLATION

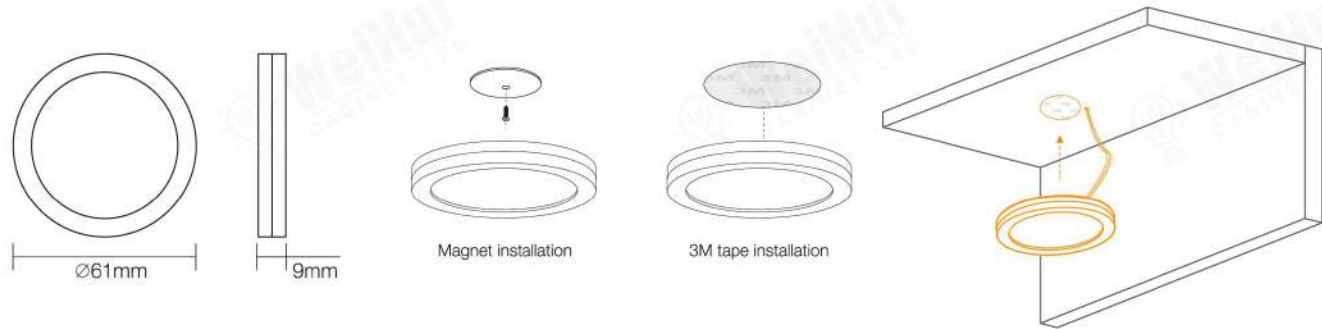

TECHNICAL DATA


Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
IM02	12VDC	2W	SMD2835	16pcs	>90

FEATURES

- Lighting soft and even without dots.
- Different finishes, Custom-made.
- Easy installation by screws.

● Gray

● Black



INSTALLATION




TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
IM03	12VDC	3W	SMD2835	21pcs	>90

FEATURES


- Lightig source soft and even.
- Recessed mount or surfaced mount.
- Using high brightness LED, save electricity, long service life.

● Silver



INSTALLATION

Recommended Groove Size: $\Phi 65 \times 12 \text{mm}$

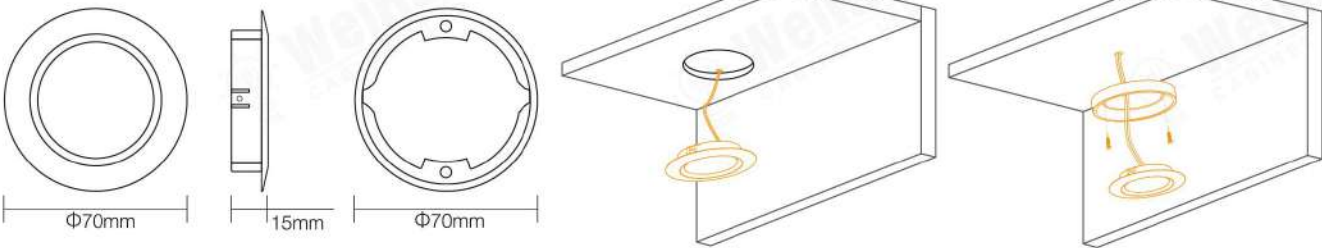


TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
IMQ01	12VDC	2.5W	SMD2835	21pcs	>90

FEATURES

- Lightig source soft and even.
- Recessed mounting, 60mm standard size.
- Competitive price with reliable quality.

● Silver



INSTALLATION

Recommended Groove Size: $\Phi 60 \times 13 \text{mm}$




TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
IQ01	12VDC	1.5W	SMD2835	28pcs	>90

FEATURES



- Different finishes, Custom-made.
- Recessed mounting, 60mm standard size.
- Very cheap for big sales.

● Chrome



INSTALLATION

Recommended Groove Size: $\Phi 60 \times 12 \text{mm}$

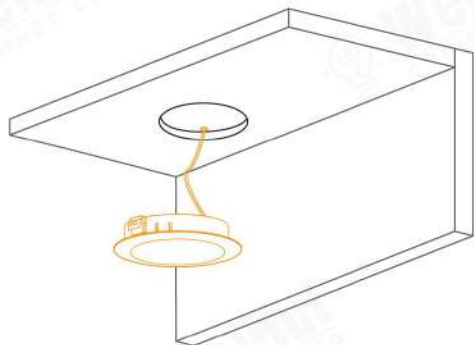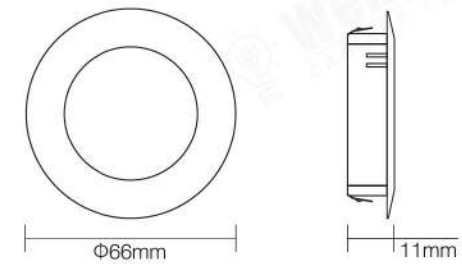

TECHNICAL DATA


Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
IQ02	12VDC	1.5W	SMD2835	24pcs	>90

FEATURES

- Lightig source soft and even.
- Recessed mounting.
- Competitive price with reliable quality.



● Silver

● Black



INSTALLATION

Recommended Groove Size: $\Phi(56-58) \times 13 \text{mm}$

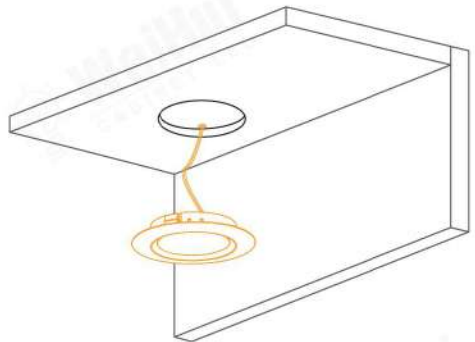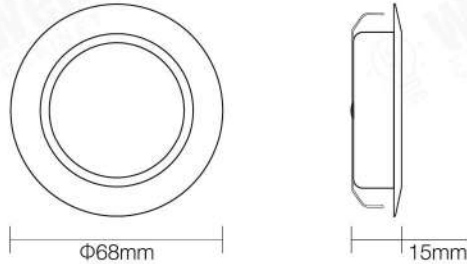


TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
IQ03	12VDC	2.3W	SMD2835	15pcs	>90

FEATURES



- Small size, Only 12mm Diameter
- Magnetic Installation, Easy to change LED Color
- Main application in Jewelry cabinets, wardrobe,etc

● Grey



INSTALLATION

Recommended Groove Size: $\Phi 20 \times 12 \text{mm}$

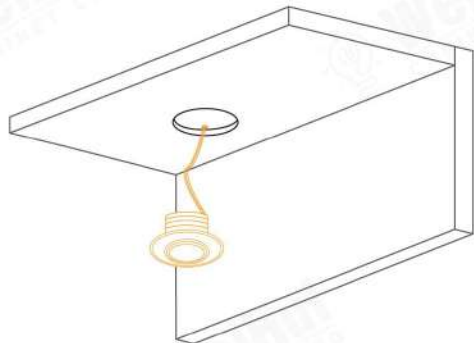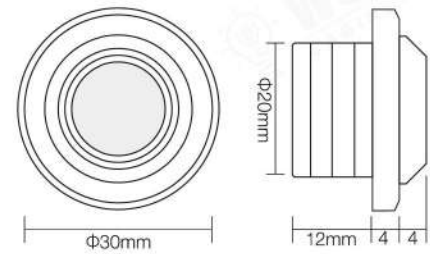


TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
IQ08	12VDC	1W	SMD	1pc	>90

FEATURES



- Small size, Only 12mm Diameter
- Available for different angles to adjust
- Main application in Jewelry cabinets, wardrobe,etc

● Grey



INSTALLATION

Recommended Groove Size: $\Phi 28 \times 12 \text{mm}$

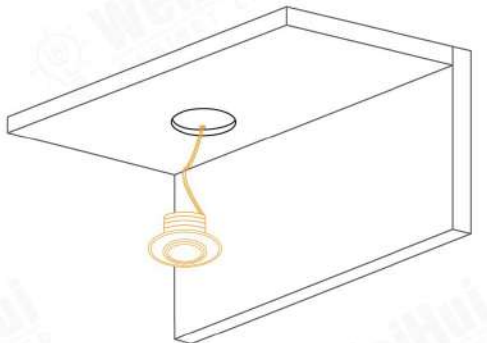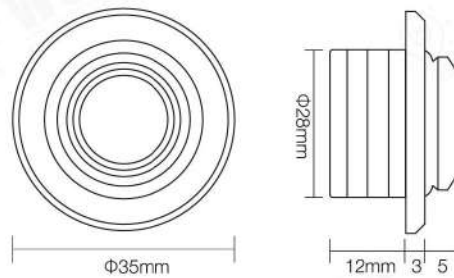


TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
IQ09	12VDC	1W	SMD	1pc	>90

FEATURES



- Small size, Only 14mm Diameter
- Good quality with competitive price.
- Main application in Jewelry cabinets, wardrobe,etc

● Grey



INSTALLATION

Recommended Groove Size: $\Phi 20 \times 14 \text{mm}$

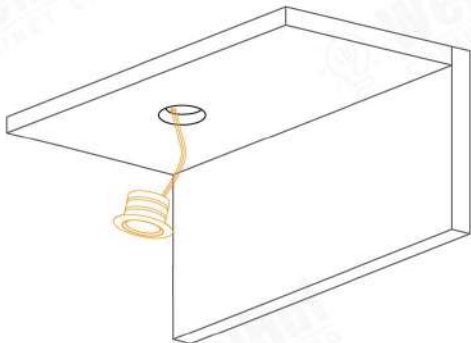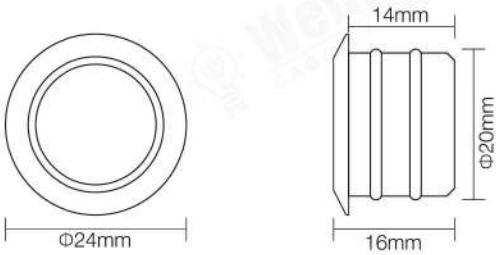


TECHNICAL DATA

Model	Input Voltage	Wattage	LED Type	LED Quantity	CRI
IQ10	12VDC	1W	SMD	1pc	>90

FEATURES



- Small size, Only 10mm Diameter
- Good quality with competitive price.
- Main application in Jewelry cabinets, wardrobe,etc

● Grey



INSTALLATION

Recommended Groove Size: $\Phi 8 \times 22 \text{mm}$

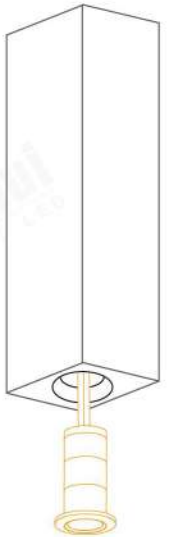

TECHNICAL DATA

Model	Voltage	Wattage	LED Type	LED Quantity	CCT	CRI
IQ11	12VDC	0.5	SMD	1PC	CW/NW/WW	>90
IQ12	12VDC	0.5	SMD	1PC	CW/NW/WW	>90
IQ13	12VDC	0.5	SMD	1PC	RGB	>90

09

JWEWLRY LIGHTS / TRACK LIGHTS





Model	JL1
Input Parameter	600mA/3V
Power	2W
Light Source	SMD2835
CRI	>90
Size	Φ6x110mm
Installation	Φ10x28mm
Surface Color	Black



Model	JL4
Input Parameter	250mA/9V
Power	3W
Light Source	1304COB
CRI	>90
Size	60x18x6.5mm
Installation	Φ10x35mm
Surface Color	Black



Model	JL2-S
Input Parameter	600mA/3V
Power	2W
Light Source	SMD3535
CRI	>90
Size	Φ20x40mm
Installation	Φ8x25mm
Surface Color	Black



Model	JL5
Input Parameter	240mA/3V
Power	1W
Light Source	SMD2525
CRI	>90
Size	Φ15x44mm
Installation	Φ10x28mm
Surface Color	Black



Model	JL2-D
Input Parameter	600mA/6V
Power	4W
Light Source	SMD3535
CRI	>90
Size	Φ20x40mm
Installation	Φ10x35mm
Surface Color	Black



Model	JL6
Input Parameter	600mA/3V
Power	2W
Light Source	SMD3535
CRI	>90
Size	Φ18x36mm
Installation	Φ8x35mm
Surface Color	Black



Model	JL3
Input Parameter	250mA/9V
Power	3W
Light Source	SMD3535
CRI	>90
Size	59x17x11mm
Installation	Φ10x35mm
Surface Color	Black



Model	JL7
Input Parameter	600mA/3V
Power	3W
Light Source	SMD3535
CRI	>90
Size	Φ16x75mm
Installation	Φ14x15mm
Surface Color	Black

Jewelry Light Magnetic Track Series



Model	JD1
Input Parameter	12/24V
Size	LX15X7mm
Installation	3M Sticker
Surface Color	Black



Model	JD1-L1-S
Input Parameter	12/24V
Power	1W
Angle	25°
CRI	>90
Size	Φ15X28mm
Installation	60x10mm
Surface Color	Black



Model	JD1-L1-D
Input Parameter	12/24V
Power	2W
Angle	25°
CRI	>90
Size	Φ15x28mm
Installation	60x10mm
Surface Color	Black




Model	JD1-L2
Input Parameter	12/24V
Power	2W
Angle	25°
CRI	>90
Size	Φ18x36mm
Installation	60x10mm
Surface Color	Black




Model	JD1-L3
Input Parameter	12/24V
Power	3W
Angle	30°
CRI	>90
Size	Φ25x44mm
Installation	60x10mm
Surface Color	Black




Model	JD1-L4
Input Parameter	12/24V
Power	2W
Angle	8-60°
CRI	>90
Size	Φ22x31.3mm
Installation	60x10mm
Surface Color	Black

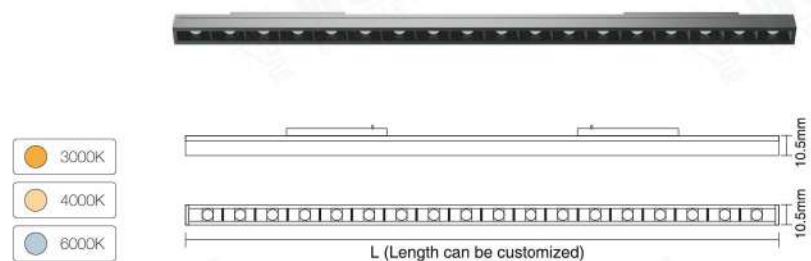

Model	JD1-L5
Input Parameter	12/24V
Power	3W
Angle	60°
CRI	>90
Size	300x10.5x10.5mm
Installation	Magnet
Surface Color	Black

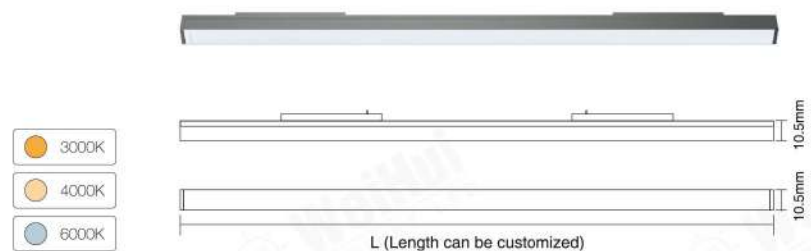

Model	JD1-L6
Input Parameter	12V
Power	3W
Angle	120°
CRI	>90
Size	300x10.5x10.5mm
Installation	Magnet
Surface Color	Black

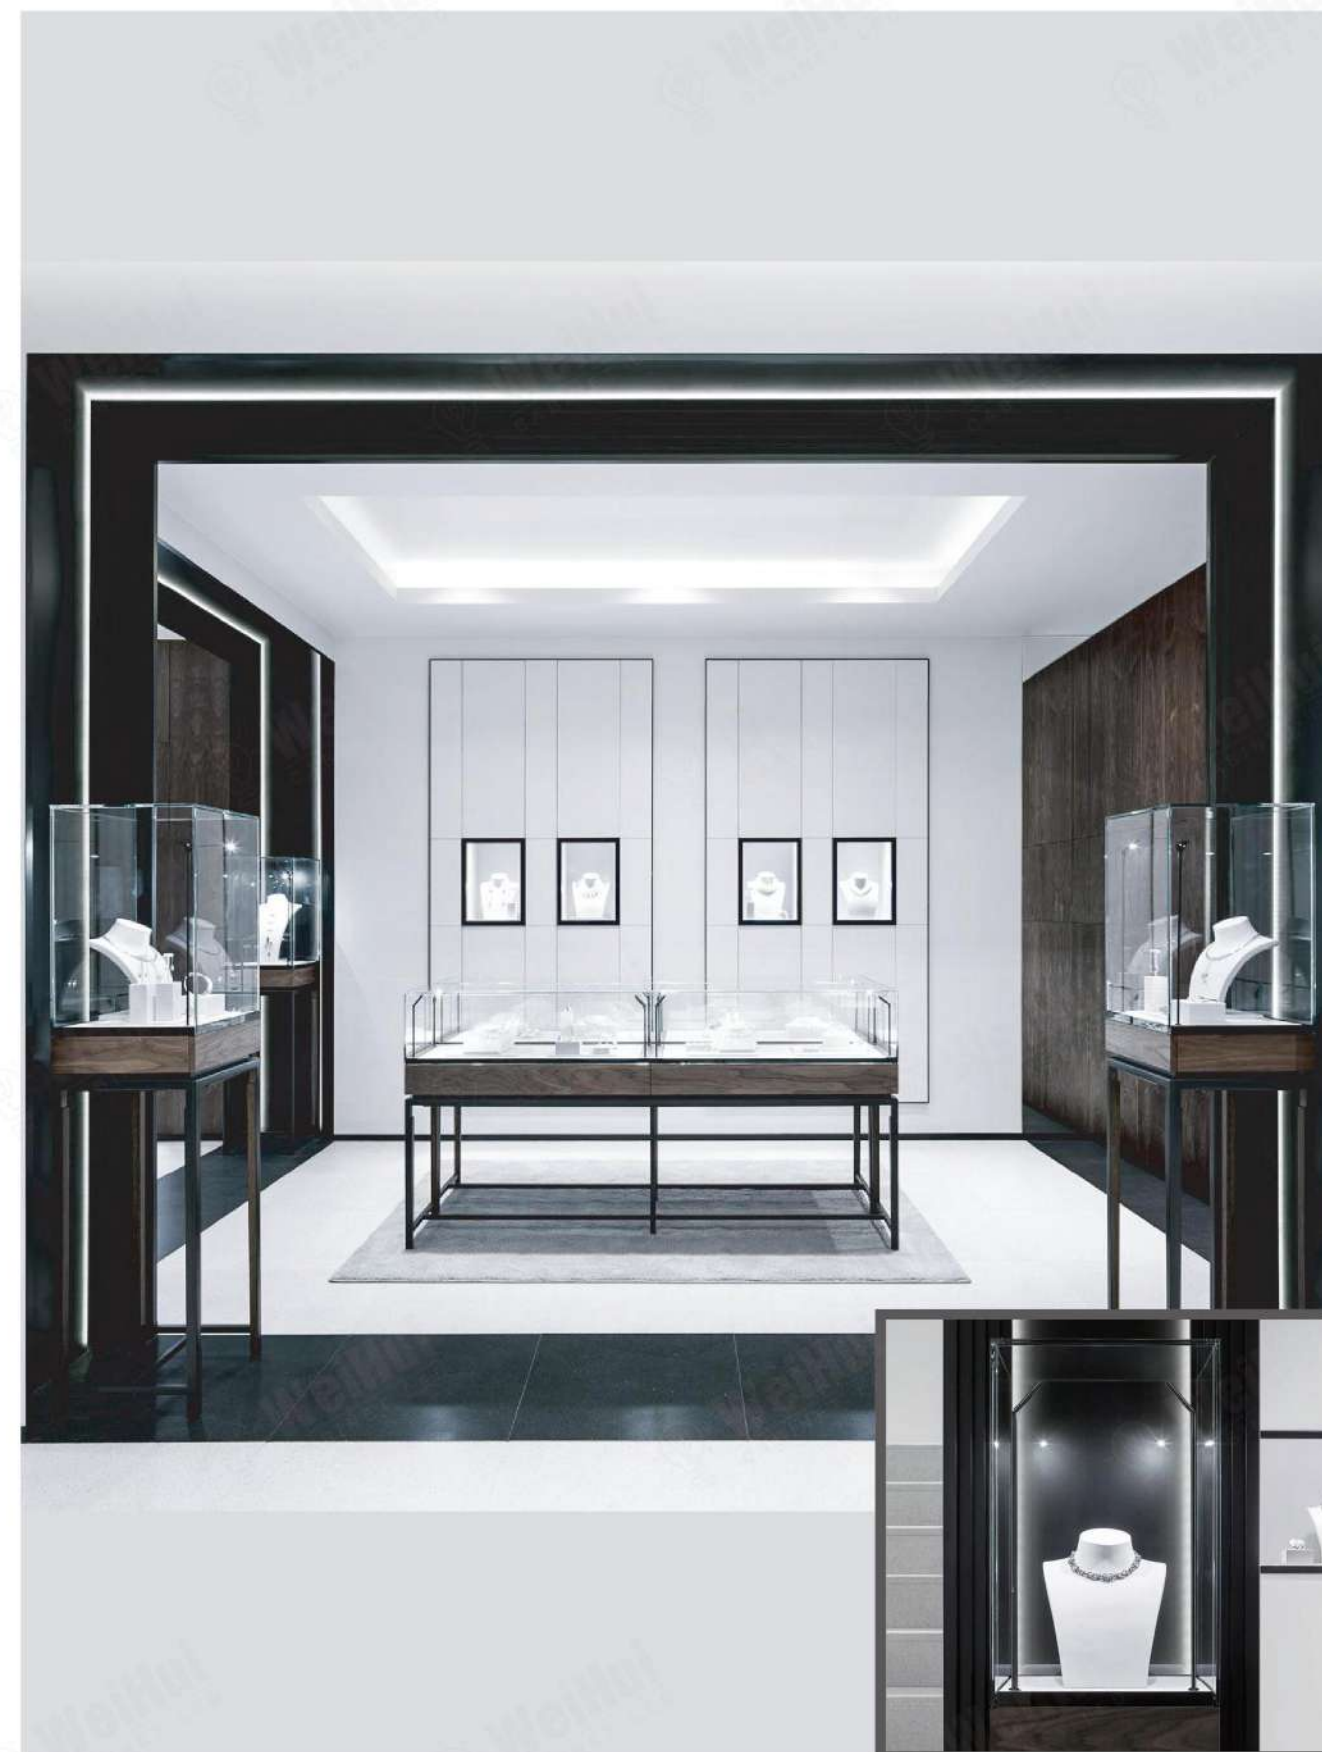

Power Rail System for Cabinet



FEATURES

- Power Rail with multi-contact power tapping, eliminates messy on-site wiring.
- Pre-embedded led lamp, Require no on-site installation
- LED Lamp draw power directly, eliminating the need for grooving and additional wiring.
- The power Receiving Ends accommodates panels of various thicknesses and features industry-standard cutout dimensions.

Power Rail



Hole Size	12x8mm
Current	5A
Installation	Recessed

Power Sending Ends for Side Panel



Power Receiving Ends for Shelf



Compatible with 25mm thick shelf
(with wire connection to LED Lamp)
Hole size: $\Phi 20\text{mm}$

Compatible with 16mm or 18mm thick shelf
(with wire connection to LED Lamp)
Hole size: $\Phi 12\text{mm}$

Power Sending Ends for Side Panel



LED Lamp with Integrated Power Tap



LED Track Light System For Cabinet



FEATURES

- Ultra-slim guide rail (10×10mm), perfectly blends with furniture and cabinets.
- Compatible with various types of lighting, including flood lights, grille lights, spotlights, etc.
- Each light comes in multiple lengths to fit cabinets of different sizes.
- No polarity requirement - no risk of short circuit.
- Snap-on installation allows for easy replacement at any time, even after installation.



LL1
10*10 Track Rail



Model	LL1
Size	L1000*W9.9*H9.8mm
Material	Aluminum
Color	Black, Silver, Dark grey
Length	Customized

LL1D.1
Power Cable



Model	LL1D.1
Size	L20*W7.7*H8mm
Material	Aluminum
Cable Length	1800mm

Flood Light



Model	LL1A
Size	W8*H8.6mm
Length	200/400/600/800/1000
Wattage	2W/4W/6W/8W/10W
Voltage	DC12V
CCT	3000K/4000K/6000K
CRI	>90
Material	Aluminum

LL1D.2
Direct Cable



Model	LL1D.2
Size	L20*W7.7*H8mm
Material	Aluminum

Grille Light



Model	LL1B
Size	W8*H8.6mm
Length	116(6heads)/310(18heads)
Voltage	DC12V
Wattage	2W/6W
CCT	3000K/4000K/6000K
CRI	>90
Material	Aluminum

LL1D.3
Corner Cable



Model	LL1D.3
Size	L20*W7.7*H8mm
Material	Aluminum

Spot Light





Model	LL1C
Size	Φ 19*H27mm
Voltage	DC12V
Wattage	1.5W
CCT	3000K/4000K/6000K
CRI	>90
Material	Aluminum



C

LED Driver Series

- 01 Serial number: PZ
- 02 Serial number: FG
- 03 Serial number: G
- 04 Serial number: T1
- 05 Serial number: T2
- 06 Serial number: A

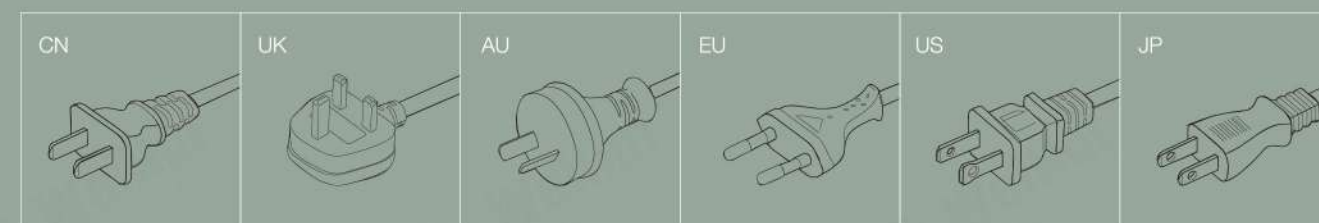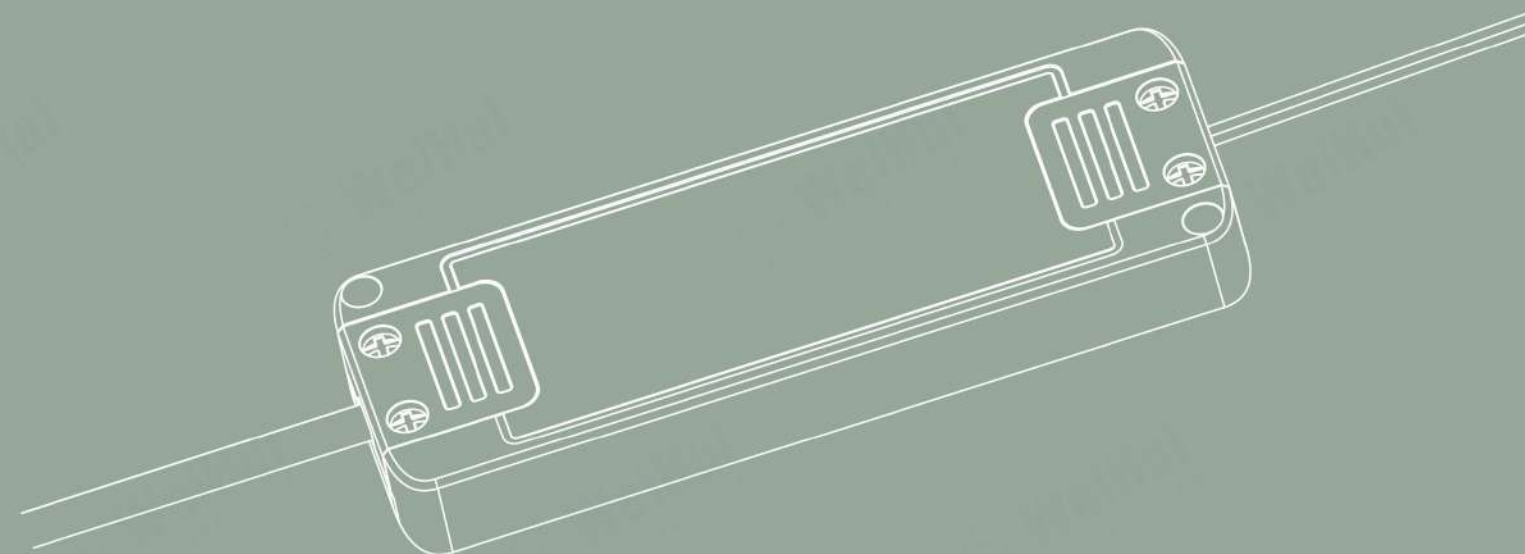



FZ Series(15mm) Constant Voltage Power Supply

10W / 20W / 40W / 60W / 100W / 150W



CE (LVD & EMC) RoHS Reach ERP

CE RoHS Reach ERP SELV

12V & 24V System Both

PF: 0.5 / 0.8



Model: PZ5B1210E / PZ5B1220E
(PZ5B1210E-EC / PZ5B1220E-EC)
Size: 150X57X15mm
Input Voltage: 220-240Vac
Output Voltage: DC 12V&24V
Max Wattage: 10W (20W)
PF: 0.5 / 0.8
Certification: LVD / EMC / ROHS / REACH / WEEE / ERP

CE RoHS Reach ERP SELV

12V & 24V System Both

PF: 0.5 / 0.95



Model: PZ5B1240E / PZ5B1240E-EC
Size: 180X57X15mm
Input Voltage: 220-240Vac
Output Voltage: DC 12V&24V
Max Wattage: 40W
PF: 0.5 / 0.95
Certification: LVD / EMC / ROHS / REACH / WEEE / ERP

CE RoHS Reach ERP SELV

12V & 24V System Both

PF: 0.5 / 0.95



Model: PZ5B1260E / PZ5B1260E-EC
Size: 210X75X15mm
Input Voltage: 220-240Vac
Output Voltage: DC 12V&24V
Max Wattage: 60W
PF: 0.5 / 0.95
Certification: LVD / EMC / ROHS / REACH / WEEE / ERP

CE RoHS Reach ERP SELV

12V & 24V System Both

PF: 0.5 / 0.95



Model: PZ5B12100E / PZ5B12150E
(PZ5B12100E-EC / PZ5B12150E-EC)
Size: 230X75X15mm
Input Voltage: 220-240Vac
Output Voltage: DC 12V&24V
Max Wattage: 100W (150W)
PF: 0.5 / 0.95
Certification: LVD / EMC / ROHS / REACH / WEEE / ERP

FG Series(18mm) Constant Voltage Power Supply

12W / 24W / 36W / 60W / 100W / 150W



CE (LVD & EMC) RoHS Reach WEEE ERP

CE RoHS Reach WEEE ERP SELV

12V & 24V System Both

PF: 0.5 / 0.8



Model: P1215FG / P1215FG-CE
(P1224FG / P1224FG-CE)

Size: 125X45X18mm

Input Voltage: 220-240Vac

Output Voltage: DC 12V&24V

Max Wattage: 15W (24W)

PF: 0.5 / 0.8

Certification: LVD / EMC / ROHS / REACH / WEEE / ERP

CE RoHS Reach WEEE ERP SELV

12V & 24V System Both

PF: 0.5 / 0.95



Model: P1236FG / P1236FG-CE-D

Size: 144X50X18mm

Input Voltage: 220-240Vac

Output Voltage: DC 12V&24V

Max Wattage: 36W

PF: 0.5 / 0.95

Certification: LVD / EMC / ROHS / REACH / WEEE / ERP

CE RoHS Reach WEEE ERP SELV

12V & 24V System Both

PF: 0.5 / 0.95



Model: P1260FG / P1260FG-CE-D

Size: 172X61X18mm

Input Voltage: 220-240Vac

Output Voltage: DC 12V&24V

Max Wattage: 60W

PF: 0.5 / 0.95

Certification: LVD / EMC / ROHS / REACH / WEEE / ERP

CE RoHS Reach WEEE ERP SELV

12V & 24V System Both

PF: 0.5 / 0.95



Model: P12100FG / P12100FG-CE-D
(P12150FG / P12150FG-CE-D)

Size: 201X71X18mm

Input Voltage: 220-240Vac

Output Voltage: DC 12V&24V

Max Wattage: 100W (150W)

PF: 0.5 / 0.95

Certification: LVD / EMC / ROHS / REACH / WEEE / ERP

G Series Constant Voltage Power Supply

12W / 24W / 36W / 60W / 100W



CE (LVD & EMC) RoHS Reach ERP

CE □ △ ⊕ ⊗ ⚡ SELV
PF: 0.5 / 0.8



Model: P1215G / P1215G-CE
Size: 30X46X16mm
Input Voltage: 220-240Vac
Output Voltage: DC12V / 24V
Max Wattage: 15W
PF: 0.5
Certification: CE / ROHS

CE □ △ ⊕ ⊗ ⚡ SELV
PF: 0.5 / 0.8



Model: P1224G / P1224G-CE
Size: 130X46X16mm
Input Voltage: 220-240Vac
Output Voltage: DC12V / 24V
Max Wattage: 24W
PF: 0.5
Certification: CE / ROHS

CE □ △ ⊕ ⊗ ⚡ SELV
PF: 0.5 / 0.95



Model: P1236G / P1236G-CE-D
Size: 145X52X18mm
Input Voltage: 220-240Vac
Output Voltage: DC12V / 24V
Max Wattage: 36W
PF: 0.5 / 0.95
Certification: CE / ROHS

CE □ △ ⊕ ⊗ ⚡ SELV
PF: 0.5 / 0.95



Model: P1260G / P1260G-CE-D
Size: 179X61X18mm
Input Voltage: 220-240Vac
Output Voltage: DC12V / 24V
Max Wattage: 60W
PF: 0.5 / 0.95
Certification: CE / ROHS

CE □ △ ⊕ ⊗ ⚡ SELV
PF: 0.5 / 0.95



Model: P12100G / P12100G-CE-D
Size: 204X71X18mm
Input Voltage: 220-240Vac
Output Voltage: DC12V / 24V
Max Wattage: 100W
PF: 0.5 / 0.95
Certification: CE / ROHS

T1 Series Constant Voltage Power Supply

100W / 150W / 200W / 250W / 300W



CE (LVD & EMC) RoHS Reach ERP

CE □ △ ⊕ ⊗ VV SELV ⚡
PF: 0.5



Model: P12100-T1
Size: 143X48X24mm
Input Voltage: 170-265Vac
Output Voltage: DC12V / 24V
Max Wattage: 100W
PF: 0.5
Certification: CE / ROHS

CE □ △ ⊕ ⊗ VV SELV ⚡
PF: 0.5



Model: P12150-T1
Size: 183X48X24mm
Input Voltage: 170-265Vac
Output Voltage: DC12V / 24V
Max Wattage: 150W
PF: 0.5
Certification: CE / ROHS

CE □ △ ⊕ ⊗ VV SELV ⚡
PF: 0.5



Model: P12200-T1
Size: 200X48X24mm
Input Voltage: 170-265Vac
Output Voltage: DC12V / 24V
Max Wattage: 200W
PF: 0.5
Certification: CE / ROHS

CE □ △ ⊕ ⊗ VV SELV ⚡
PF: 0.5



Model: P12250-T1
Size: 208X63X18mm
Input Voltage: 170-265Vac
Output Voltage: DC12V / 24V
Max Wattage: 250W
PF: 0.5
Certification: CE / ROHS

CE □ △ ⊕ ⊗ VV SELV ⚡
PF: 0.5



Model: P12300-T1
Size: 208X63X18mm
Input Voltage: 170-265Vac
Output Voltage: DC12V / 24V
Max Wattage: 300W
PF: 0.5
Certification: CE / ROHS

T2 Series Constant Voltage Power Supply

100W / 150W / 200W / 300W / 400W



CE (LVD & EMC) RoHS Reach ERP

CE □ □ □ □ □ SELV ⚡
PF: 0.5



Model: P12100-T2
Size: 95X53X22mm
Input Voltage: 170-265Vac
Output Voltage: DC12V / 24V
Max Wattage: 100W
PF: 0.5
Certification: CE / ROHS

CE □ □ □ □ □ SELV ⚡
PF: 0.5



Model: P12150-T2
Size: 250X53X22mm
Input Voltage: 170-265Vac
Output Voltage: DC12V / 24V
Max Wattage: 150W
PF: 0.5
Certification: CE / ROHS

CE □ □ □ □ □ SELV ⚡
PF: 0.5



Model: P12200-T2
Size: 282X53X22mm
Input Voltage: 170-265Vac
Output Voltage: DC12V / 24V
Max Wattage: 200W
PF: 0.5
Certification: CE / ROHS

CE □ □ □ □ □ SELV ⚡
PF: 0.5



Model: P12300-T2
Size: 282X53X22mm
Input Voltage: 170-265Vac
Output Voltage: DC12V / 24V
Max Wattage: 300W
PF: 0.5
Certification: CE / ROHS

CE □ □ □ □ □ SELV ⚡
PF: 0.5



Model: P12400-T2
Size: 358X65X22mm
Input Voltage: 170-265Vac
Output Voltage: DC12V / 24V
Max Wattage: 400W
PF: 0.5
Certification: CE / ROHS

A Series Constant Voltage Power Supply

12W / 24W / 36W / 60W



CE RoHS SELV CB PF: 0.5



Model: P1212A EU
Size: 76X38X23mm
Input Voltage: 100-240Vac
Output Voltage: DC12V /24V
Max Wattage: 12W
PF: 0.5
Certification: UL / CE / ROHS

CE RoHS SELV CB PF: 0.5



Model: P1224A EU
Size: 95X43X23mm
Input Voltage: 100-240Vac
Output Voltage: DC12V /24V
Max Wattage: 24W
PF: 0.5
Certification: UL / CE / ROHS

CE RoHS SELV CB PF: 0.5



Model: P1236A EU
Size: 95X43X23mm
Input Voltage: 100-240Vac
Output Voltage: DC12V /24V
Max Wattage: 36W
PF: 0.5
Certification: UL / CE / ROHS

CE RoHS SELV CB PF: 0.5




Model: P1260A EU
Size: 113X45X30mm
Input Voltage: 100-240Vac
Output Voltage: DC12V /24V
Max Wattage: 60W
PF: 0.5
Certification: UL / CE / ROHS



Flexible Light Series

- 01 COB Flexible Light Series
- 02 SCOB Flexible Light Series
- 03 SMD Flexible Light Series
- 04 Quick Connector Series

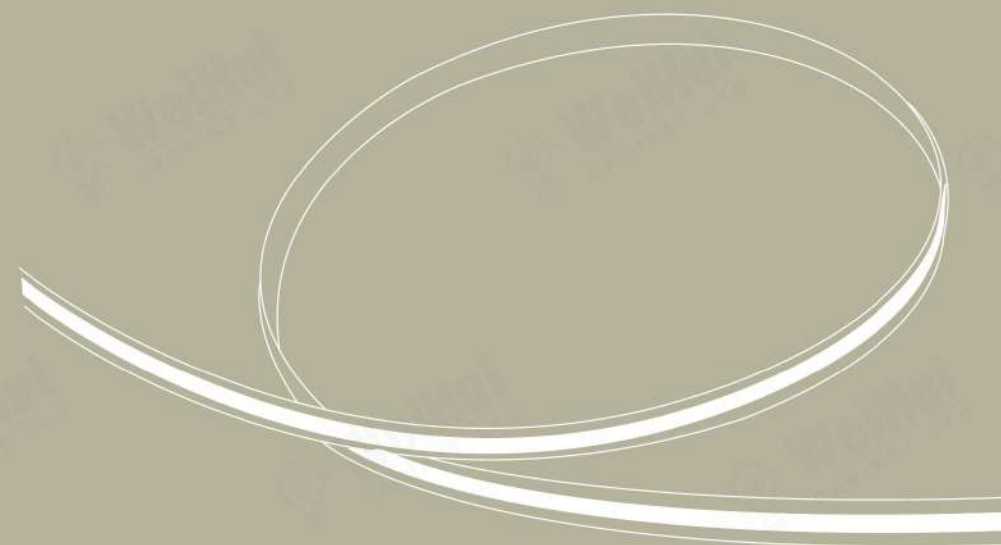



COB Flexible Light Series





FEATURES

- 12V, 24V power supply, safe and reliable.
- Line in led chips design, lighting soft without dots.
- Using high-quality chip light source, long warranty.
- Irregular design body decoration, suitable for living room, showroom, etc.



SINGLE COLOR-COB LED Strip (3-year warranty)

COB-320 Series



12VDC	8W/m	320pcs/m	80LM/m	CRI>90
-------	------	----------	--------	--------

FC320W8-7: Roll to Roll Design





24VDC	8W/m	320pcs/m	80LM/m	CRI>90
-------	------	----------	--------	--------

FC320W8-6: Roll to Roll Design

12VDC	10W/m	320pcs/m	110LM/m	CRI>90
-------	-------	----------	---------	--------

FC320W8-8: Custom-available(Watt/Lumen/LOGO.etc)

COB-480 Series



12VDC	10W/m	480pcs/m	90LM/m	CRI>90
-------	-------	----------	--------	--------

FC480W8-8: Roll to Roll Design

24VDC	10W/m	480pcs/m	90LM/m	CRI>90
-------	-------	----------	--------	--------

FC480W8-6: Roll to Roll Design

12VDC	10.5W/m	480pcs/m	90LM/m	CRI>90
-------	---------	----------	--------	--------

FC480W8-7: Roll to Roll Design, Colors selectable


12VDC	10.5W/m	480pcs/m	75LM/m	CRI>90
-------	---------	----------	--------	--------

FC480W8-9: Roll to Roll Design, Colors selectable

12VDC	10W/m	480pcs/m	90LM/m	CRI>90
-------	-------	----------	--------	--------

FC480W8-10: Custom-available(Watt/Lumen/LOGO.etc)

COB-384 Series

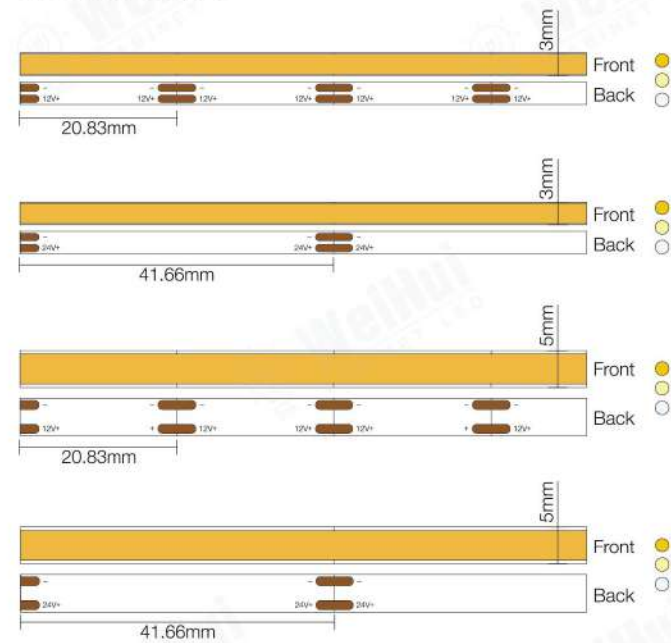

12VDC	7W/m	384pcs/m	90LM/m	CRI>90
-------	------	----------	--------	--------

FC384W3-1: 3mm Ultra Narrow Size, Custom-available

24VDC	7W/m	384pcs/m	90LM/m	CRI>90
-------	------	----------	--------	--------

FC384W3-2: 3mm Ultra Narrow Size, Custom-available


12VDC	10W/m	384pcs/m	90LM/m	CRI>90
-------	-------	----------	--------	--------

FC384W5-1: 5mm Regular Size, Custom-available

24VDC	10W/m	384pcs/m	90LM/m	CRI>90
-------	-------	----------	--------	--------

FC384W5-2: 5mm Regular Size, Custom-available

COB-400 Series

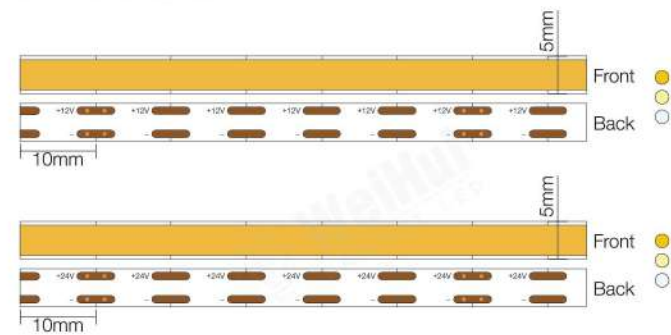


12VDC	10W/m	400pcs/m	80LM/m	CRI>90
-------	-------	----------	--------	--------

FC400W5-1: Ultra Short Cutting Set- Only 10mm Per cut

24VDC	10W/m	400pcs/m	80LM/m	CRI>90
-------	-------	----------	--------	--------

FC400W5-2: Ultra Short Cutting Set- Only 10mm Per cut

COB-528 Series

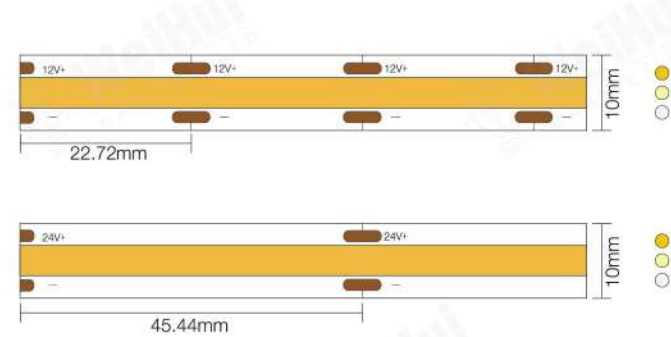

12VDC	14W/m	528pcs/m	100LM/m	CRI>90
-------	-------	----------	---------	--------


FC528W10-1: Roll to Roll Design

24VDC	14W/m	528pcs/m	100LM/m	CRI>90
-------	-------	----------	---------	--------

FC528W10-2: Roll to Roll Design

DUAL COLOR-COB LED Strip (3-year warranty)

2 Wires CCT

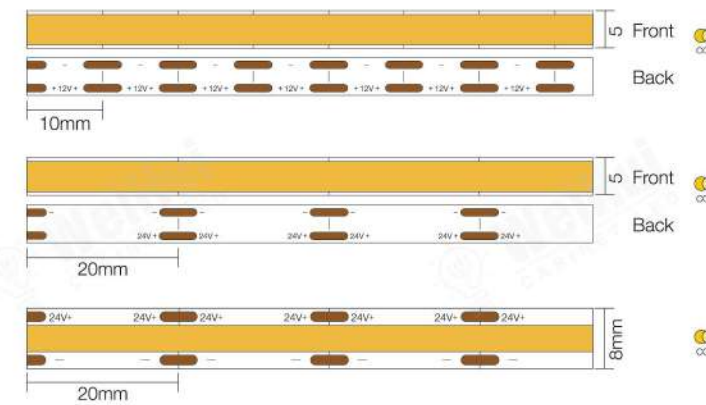

12VDC	7+7W/m	600pcs/m	60-80LM/m	CRI>90
-------	--------	----------	-----------	--------

FC600W5-2: Dual Color- 2 Wires, 5mm Width


24VDC	7+7W/m	600pcs/m	60-80LM/m	CRI>90
-------	--------	----------	-----------	--------

FC600W5-1: Dual Color- 2 Wires, 5mm Width

24VDC	7+7W/m	600pcs/m	60-80LM/m	CRI>90
-------	--------	----------	-----------	--------

FC600W8-1: Dual Color- 2 Wires, 8mm Width

3 Wires CCT

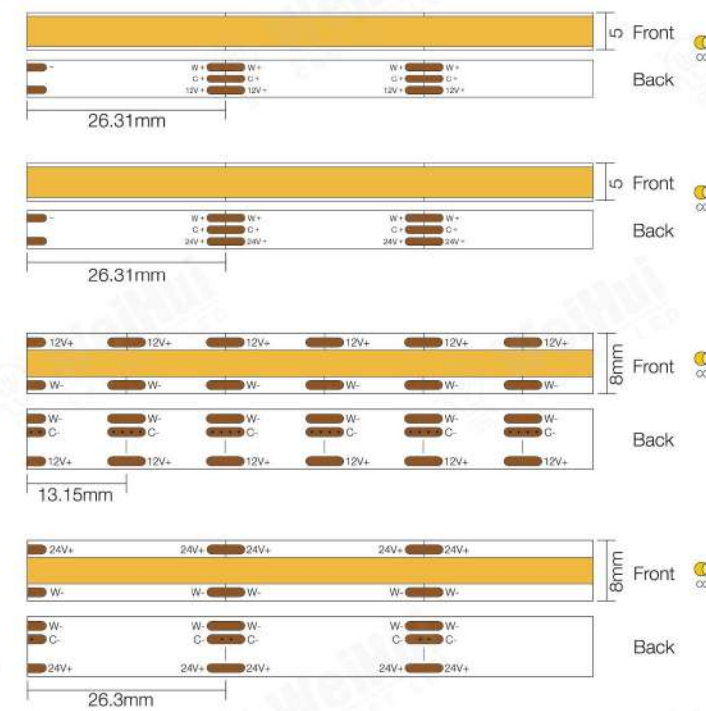

12VDC	6+6W/m	608pcs/m	80-100LM/m	CRI>90
-------	--------	----------	------------	--------

FC608W5-1: Dual Color- 3 Wires, 5mm Width

24VDC	6+6W/m	608pcs/m	80-100LM/m	CRI>90
-------	--------	----------	------------	--------

FC608W5-2: Dual Color- 3 Wires, 5mm Width


12VDC	6+6W/m	608pcs/m	80-100LM/m	CRI>90
-------	--------	----------	------------	--------

FC608W8-1: Dual Color- 3 Wires, 8mm Width

24VDC	6+6W/m	608pcs/m	80-100LM/m	CRI>90
-------	--------	----------	------------	--------


FC608W8-2: Dual Color- 3 Wires, 8mm Width

DUAL COLOR-COB LED Strip (3-year warranty)

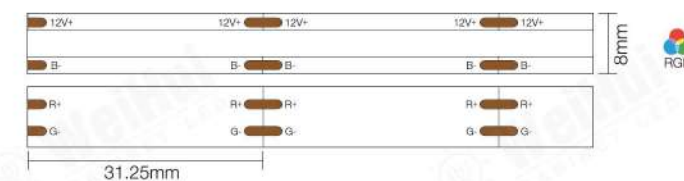

12VDC	10W/m	576pcs/m	40LM/m	CRI>90
-------	-------	----------	--------	--------

FC576W8-1: RGB COLORS, Custom-available

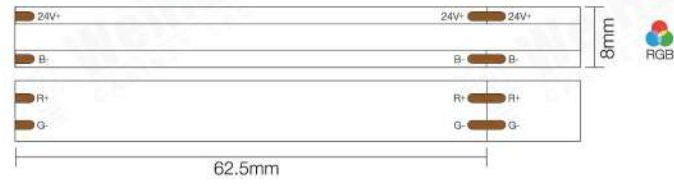


12VDC	10W/m	765pcs/m	40LM/m	CRI>90
-------	-------	----------	--------	--------

F576W8-2: RGB COLORS, Custom-available




24VDC	19W/m	784pcs/m	50LM/m	CRI>90
-------	-------	----------	--------	--------

FC784W12-1: RGBW COLORS, Custom-available

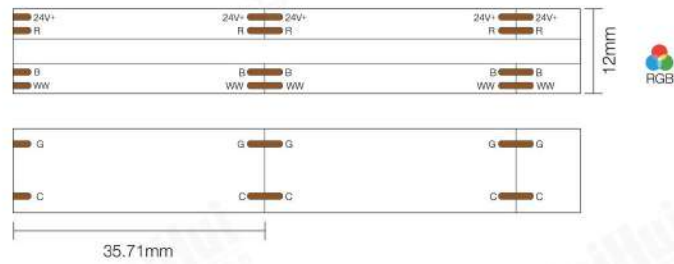

12VDC	21W/m	840pcs/m	50LM/m	CRI>90
-------	-------	----------	--------	--------

FC840W12-1: RGBCW COLORS, Custom-available



12VDC	16W/m	720pcs/m	/	CRI>90
-------	-------	----------	---	--------

FC720W10-1: RGB COB in Running Strip light, 720pcs/m, 10mm




24VDC	16W/m	720pcs/m	/	CRI>90
-------	-------	----------	---	--------

FC720W10-2: RGB COB in Running Strip light, 720pcs/m, 10mm



12VDC	10W/m	720pcs/m	/	CRI>90
-------	-------	----------	---	--------


FC720W12-1: RGB COB in Running Strip light, 720pcs/m, 12mm



24VDC	19W/m	720pcs/m	/	CRI>90
-------	-------	----------	---	--------


FC720W10-2: RGB COB in Running Strip light, 720pcs/m, 12mm

Color Change/ Running-COB LED Strip (3-year warranty)




12VDC	14W/m	420pcs/m	/	CRI>90
-------	-------	----------	---	--------

FC420W10-1: RGB COB in Running Strip light, 420pcs/m




24VDC	14W/m	420pcs/m	/	CRI>90
-------	-------	----------	---	--------

FC420W10-1: RGB COB in Running Strip light, 420pcs/m



12VDC	8W/m	576pcs/m	/	CRI>90
-------	------	----------	---	--------

FC576W10-2: RGB COB in Running Strip light, 576pcs/m



24VDC	8W/m	576pcs/m	/	CRI>90
-------	------	----------	---	--------


FC576W10-3: RGB COB in Running Strip light, 576pcs/m

Special Features-COB LED Strip (3-year warranty)



12VDC	7W/m	320pcs/m	100LM/m	CRI>90
-------	------	----------	---------	--------

FC320W6-1: Cutting Free design, Roll to Roll



48VDC	8W/m	480pcs/m	100LM/m	CRI>90
-------	------	----------	---------	--------

FC480W8-11: Custom-Made, 48V Series



220VAC	10W/m	296pcs/m	90LM/m	CRI>90
--------	-------	----------	--------	--------







FC296W8-1: Custom-Made, 220V Series

SCOB Flexible Light Series



FEATURES

- Lighting soft and even without dots.
- Compared to COB series, more brightness, up to 130lm per watt.
- Using SMD instead of small led chips, color temperature become more stable in long time use.
- High quality with long warranty, up to 5 years.



24VDC	5W/m	300pcs/m	90LM/m	CRI>90
-------	------	----------	--------	--------

SCOB: 24V-1515-300LED-W3 (Ultra 3mm Slim, Free Cutting Design)

24VDC	10W/m	256pcs/m	90LM/m	CRI>90
-------	-------	----------	--------	--------

SCOB: 24V-2216-256LED-W8 (Free Cutting Design, 256pcs/m)

24VDC	10W/m	300pcs/m	110LM/m	CRI>90
-------	-------	----------	---------	--------

SCOB: 24V-2216-300LED-W8 (Free Cutting Design, 300pcs/m)

24VDC	10W/m	320pcs/m	120LM/m	CRI>90
-------	-------	----------	---------	--------

SCOB: 24V-2216-320LED-W8 (High Brightness Design, 320pcs/m)

24VDC	5W/m	300pcs/m	90LM/m	CRI>90
-------	------	----------	--------	--------

SCOB: 24V-1515-300LED-W3 (Ultra 3mm Slim, Free Cutting Design)

24VDC	10W/m	256pcs/m	90LM/m	CRI>90
-------	-------	----------	--------	--------

SCOB: 24V-2216-256LED-W8 (Free Cutting Design, 256pcs/m)

24VDC	10W/m	300pcs/m	110LM/m	CRI>90
-------	-------	----------	---------	--------

SCOB: 24V-2216-300LED-W8 (Free Cutting Design, 300pcs/m)

24VDC	10W/m	320pcs/m	120LM/m	CRI>90
-------	-------	----------	---------	--------

SCOB: 24V-2216-320LED-W8 (High Brightness Design, 320pcs/m)

SMD Flexible Light Series





FEATURES

- 12V, 24V power supply, safe and reliable.
- Using high-quality chip light source, Long warranty.
- Multi led quantity per meter for selection, such as 120/168/240pcs per meter, etc
- Irregular design body decoration, suitable for living room, showroom, etc.



Regular SMD 2835 Series



12VDC	10W/m	120pcs/m	90LM/m	CRI>90
-------	-------	----------	--------	--------

12V-2835-120LED-W8




12VDC	10W/m	120pcs/m	70-90LM/m	CRI>90
-------	-------	----------	-----------	--------

12V-2835-120LED-W8 (Dual Color 2 Wires)

12VDC	10W/m	120pcs/m	70-90LM/m	CRI>90
-------	-------	----------	-----------	--------

12V-2835-120LED-W8 (Dual Color 3 Wires)

Cutting-Free SMD 2835 Series



12VDC	7.2W/m	120pcs/m	90LM/m	CRI>90
-------	--------	----------	--------	--------

12V-2835-120LED-W8



12VDC	10W/m	120pcs/m	80-90LM/m	CRI>90
-------	-------	----------	-----------	--------

12V-2835-120LED-W8 (Dual Color 2 Wires)

12VDC	10W/m	120pcs/m	70-90LM/m	CRI>90
-------	-------	----------	-----------	--------

12V-2835-120LED-W8 (Dual Color 3 Wires)

Featured SMD Strip Light Series



24VDC	10W/m	132pcs/m	90LM/m	CRI>90
-------	-------	----------	--------	--------

24V-2835-132LED-W8 (Cutting-Free NEW DESIGN)

12VDC	10W/m	120pcs/m	100LM/m	CRI>90
-------	-------	----------	---------	--------


12V-2835-120LED-W8 (Design For Mirror)

Quick Connector




OA2P-5

FPC to Wire (5mm Width)

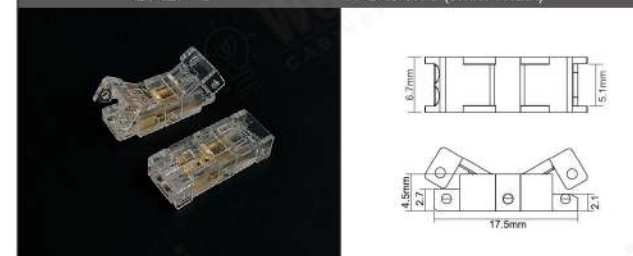


OB2P-5

FPC to FPC (5mm Width)

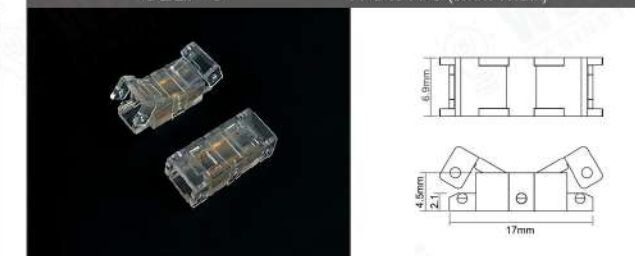


OA2P-8

FPC to Wire (8mm Width)

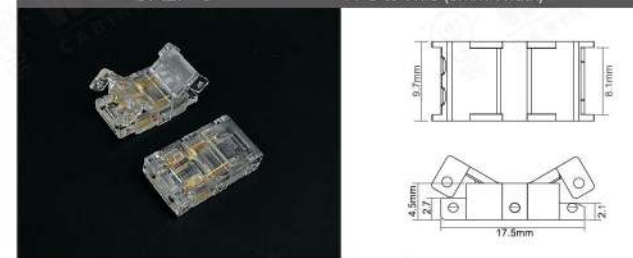


OB2P-8

FPC to FPC (8mm Width)

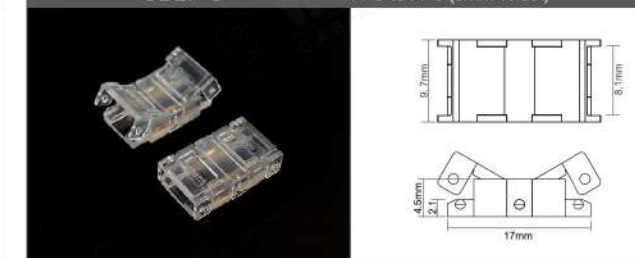


OA2P-10

FPC to Wire (10mm Width)

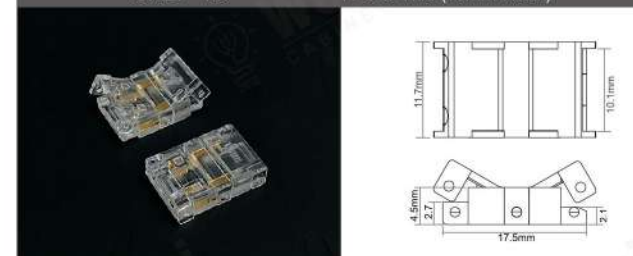


OB2P-10

FPC to FPC (10mm Width)

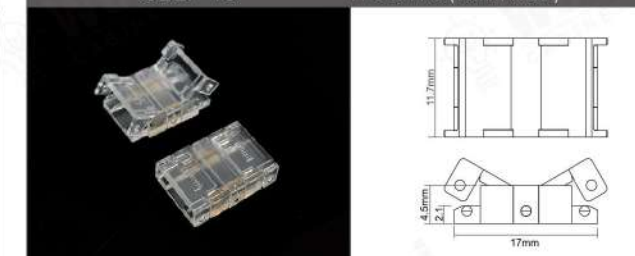

OB2P-8-L

FPC to FPC (8mm Width)

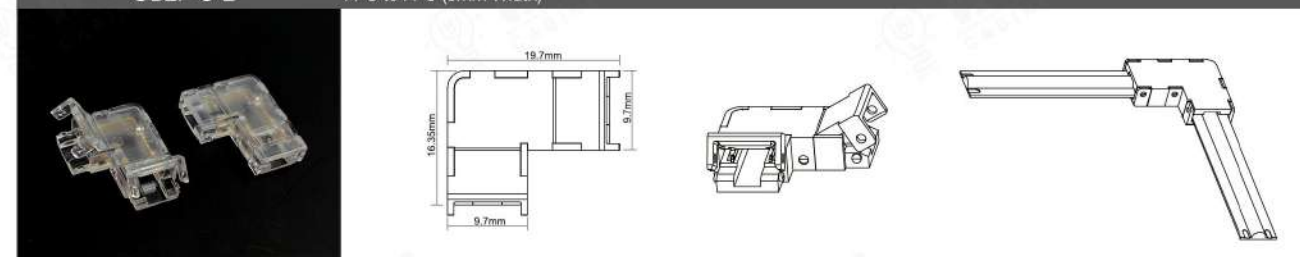


FEATURES

- Suitable for different strip light width, 5 & 8 & 10mm,etc
- SMD and COB led strip light both available (Different type)
- Including FPC to FPC, FPC to wire.etc
- Use repeatedly


E

Accessories Series


- 01 LED Distributor + Extension Cable
- 02 Show Box Series
- 05 Aluminium Profile Appendix

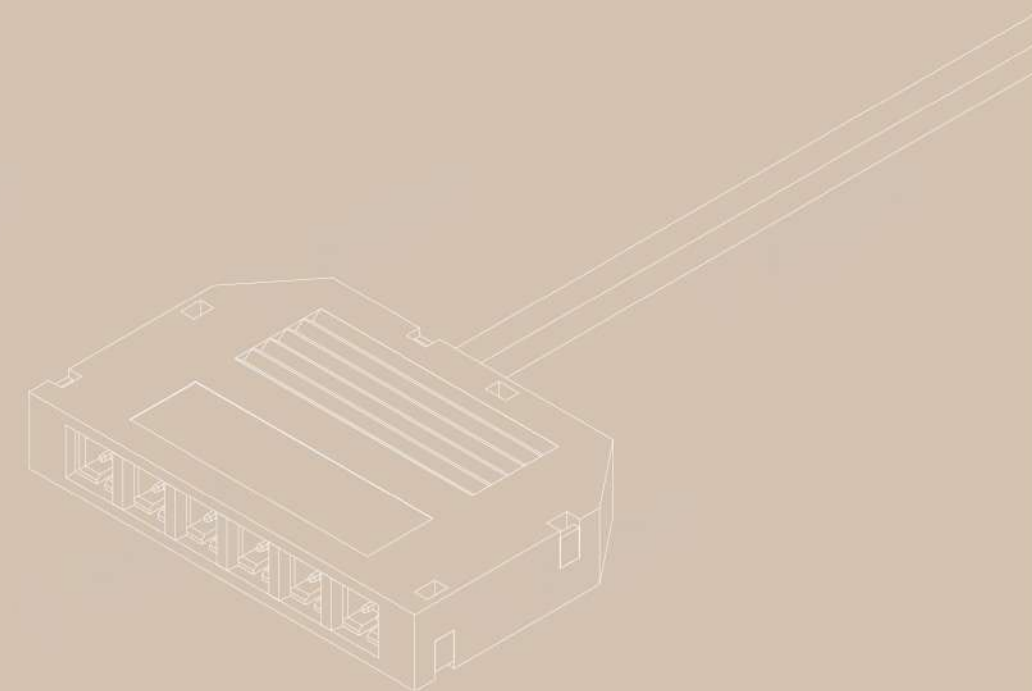


LED Distributor



Model MF01-3way
Connector 3-Way
Color Black / White
Length 1800mm
Packing 10pcs/bag




Model MF01-4way
Connector 4-Way
Color Black / White
Length 1800mm
Packing 10pcs/bag




Model MF01-6way
Connector 6-Way
Color Black / White
Length 1800mm
Packing 10pcs/bag

LED Y-line



Model MF02
Connector 2-Way
Color Black / White
Length 250mm
Packing 10pcs/bag

Dupont Extension Cable



Model MY01 / MY02
Color Black / White
Length 1800mm
Packing 10pcs/bag

Extension Cable Of Sensor Head



Model MY03
Color Black / White
Length 1000mm
Packing 10pcs/bag

Show Panel Series

Panel A

Panel B

Panel C

Panel D


Panel E

Panel F













Panel G

Panel H

Aluminium Profile Appendix

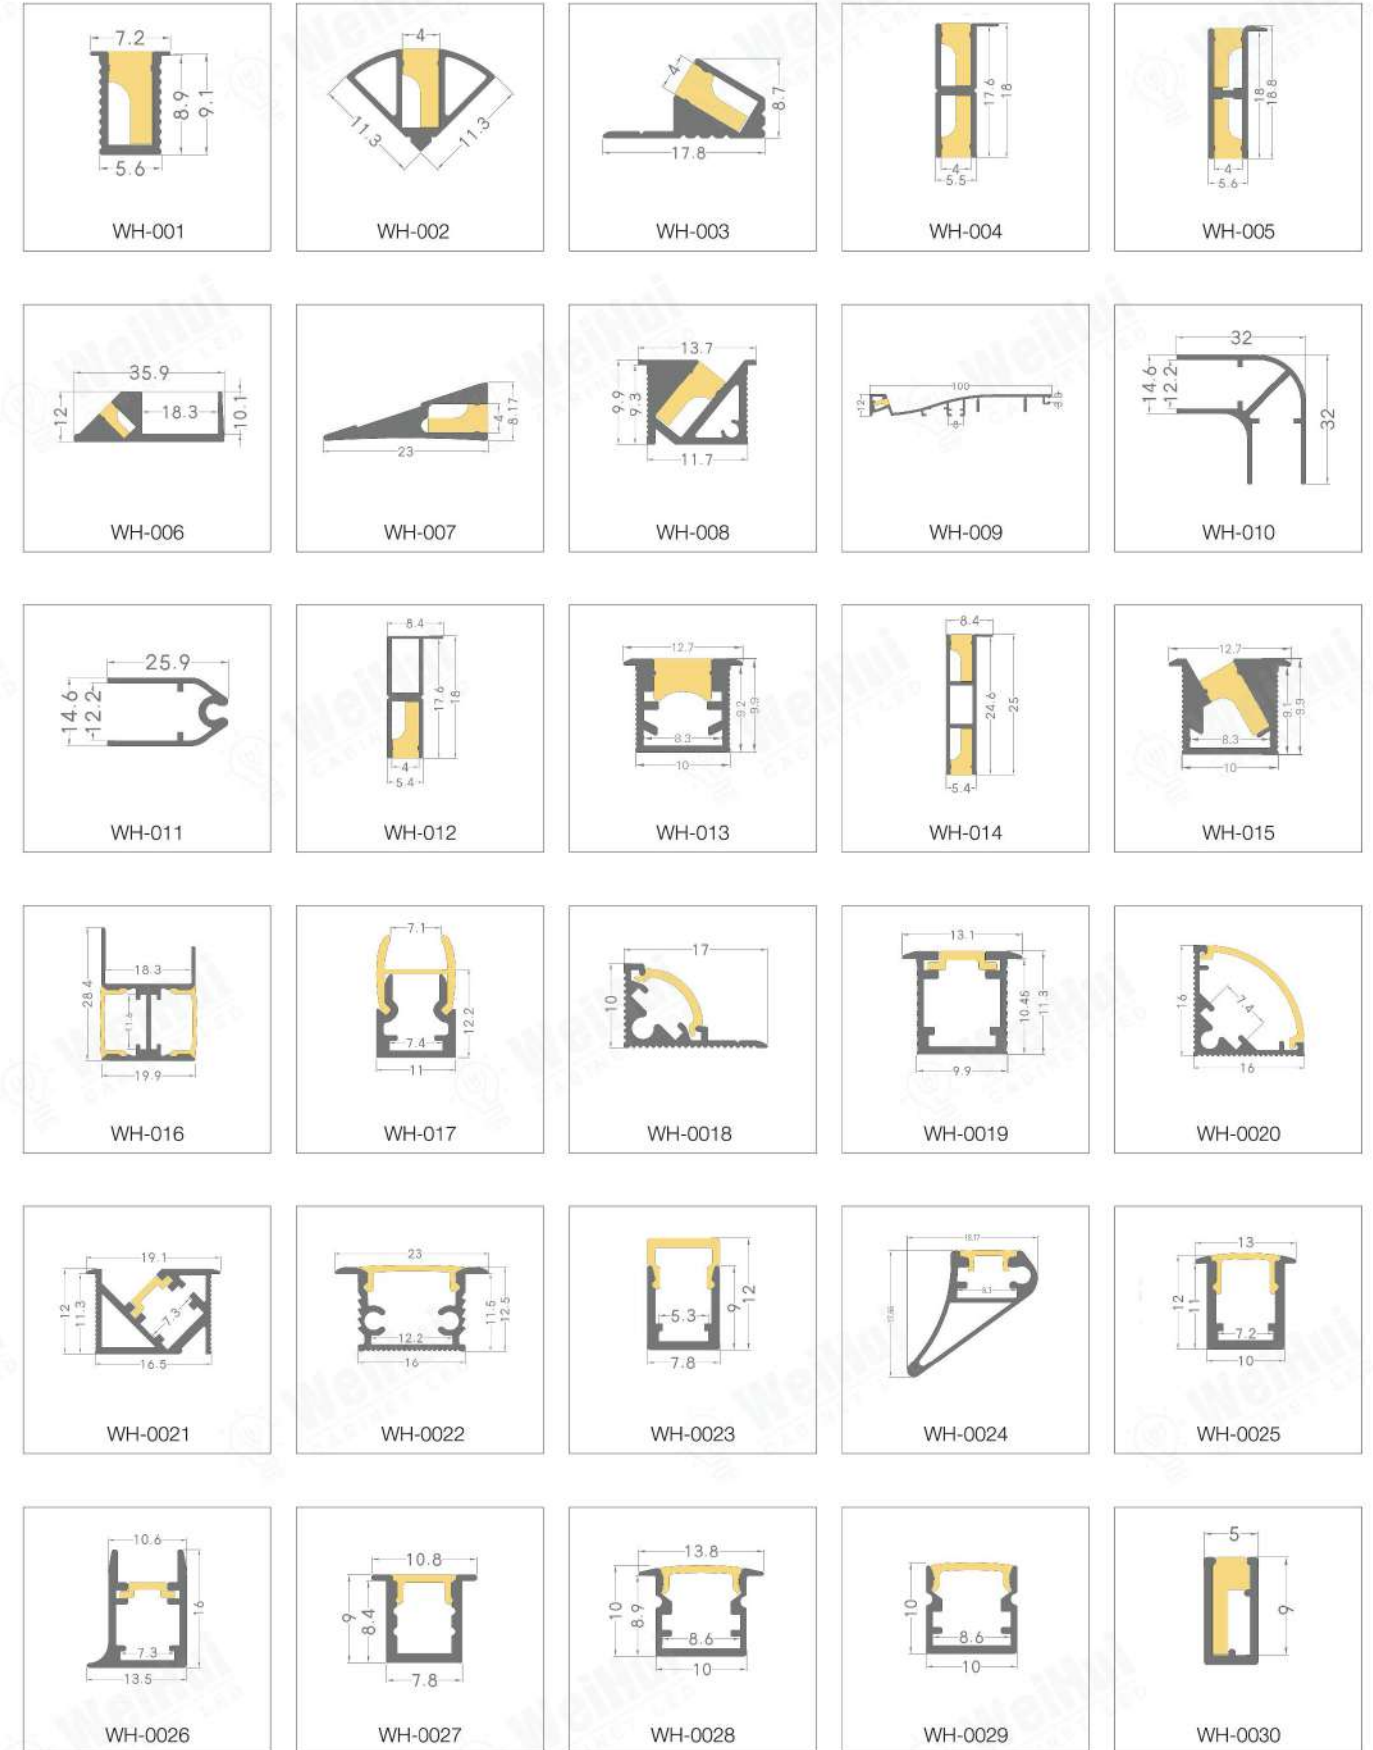



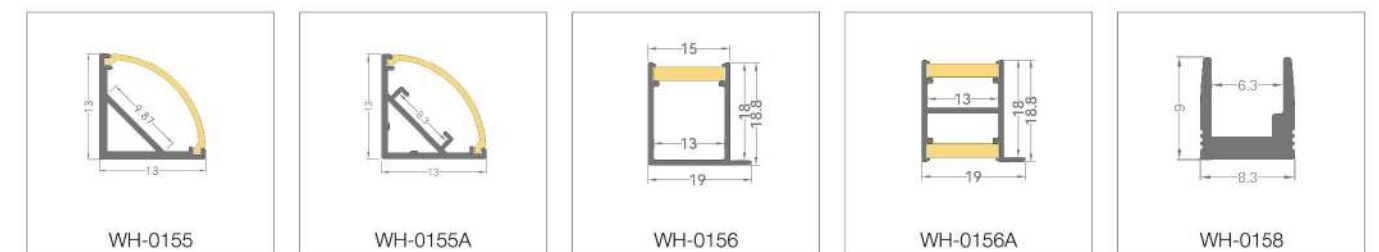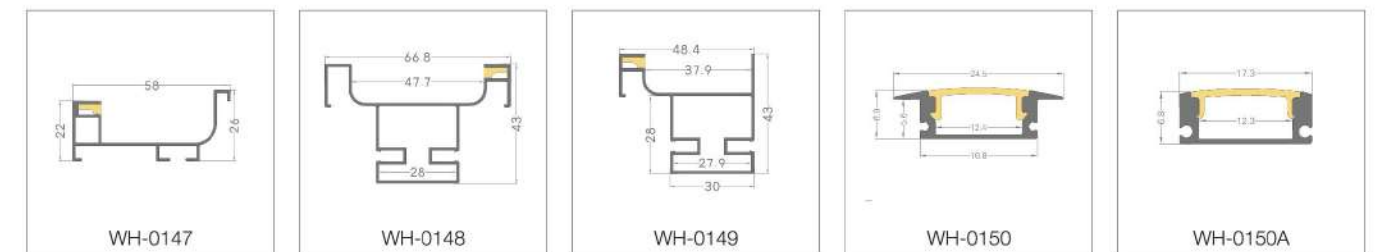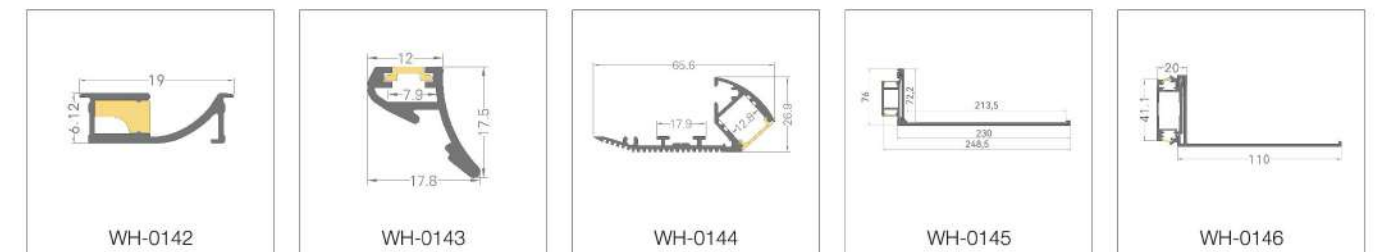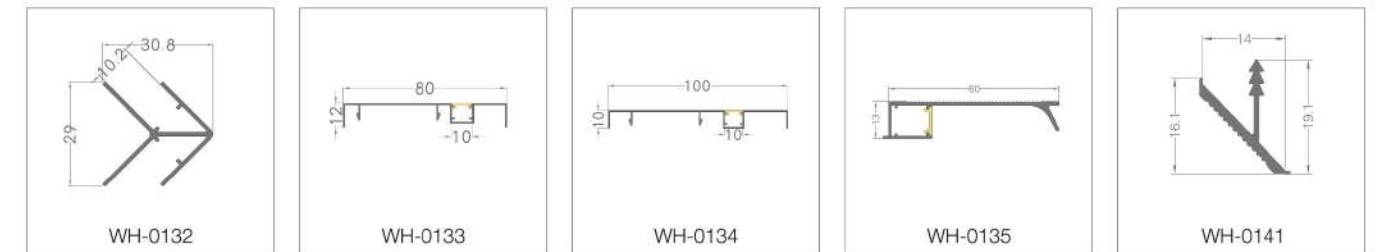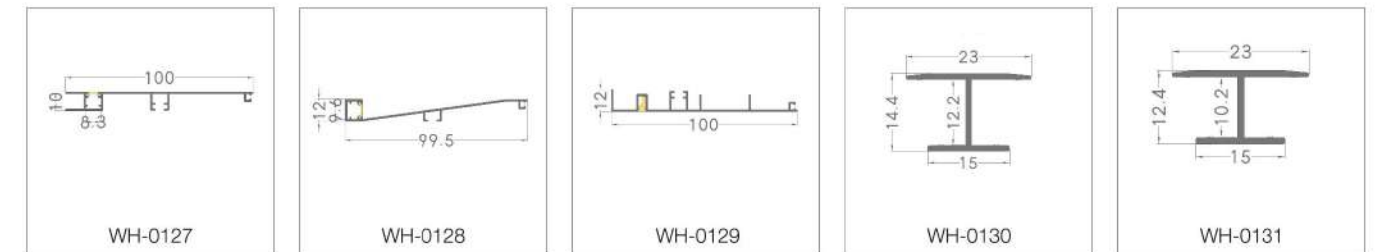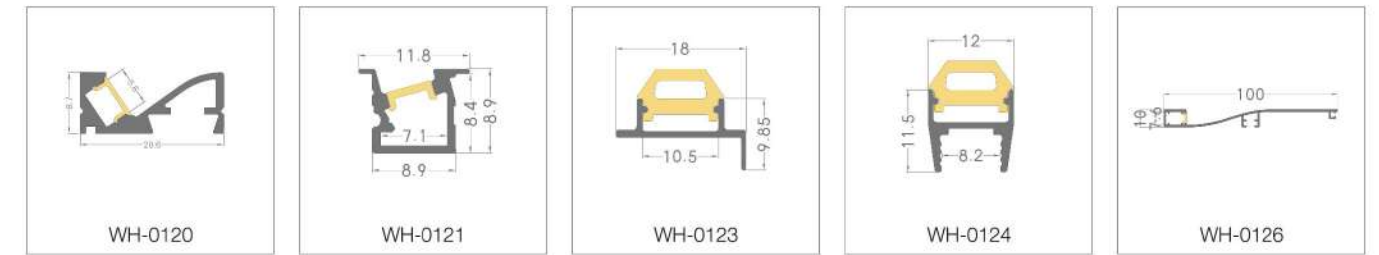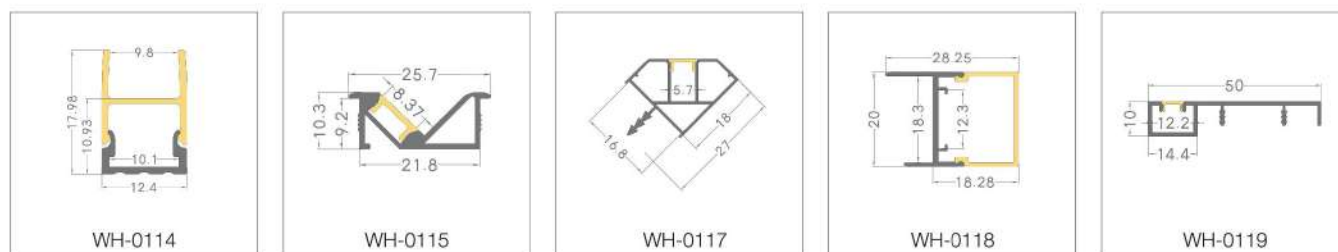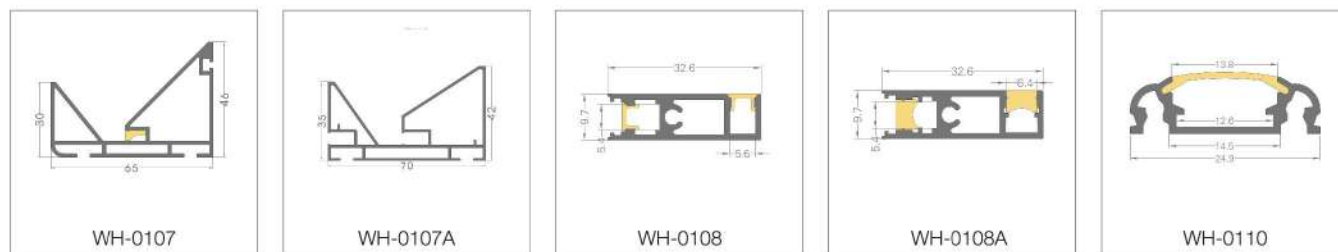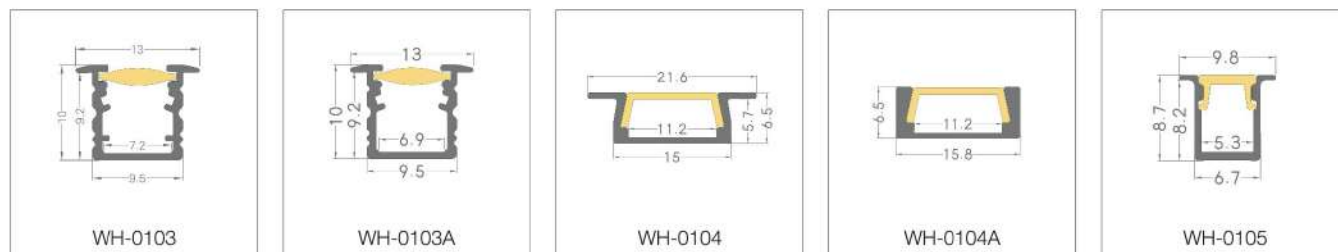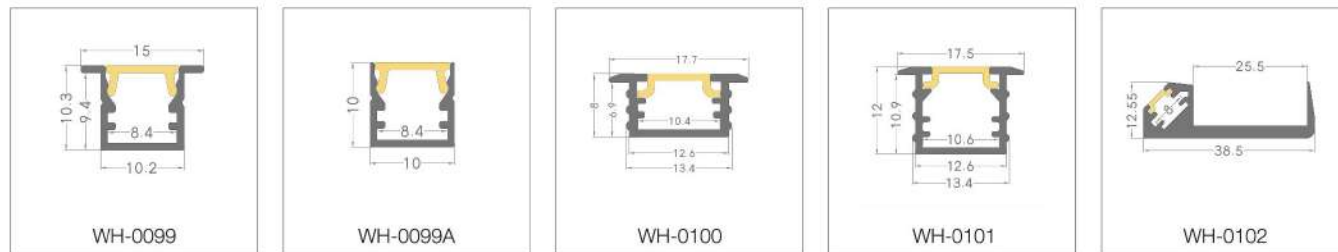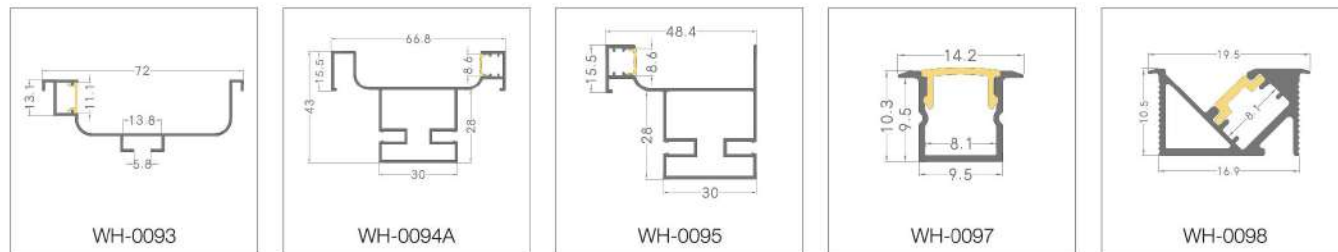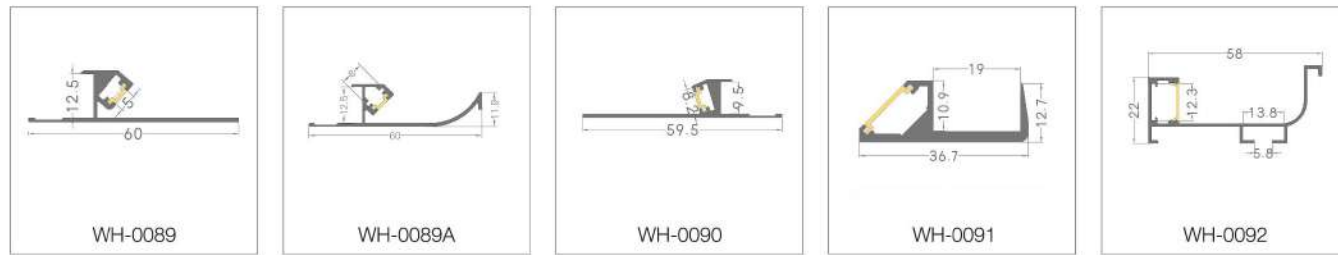

www.wh-cabinetled.com