




Carriage Bolt

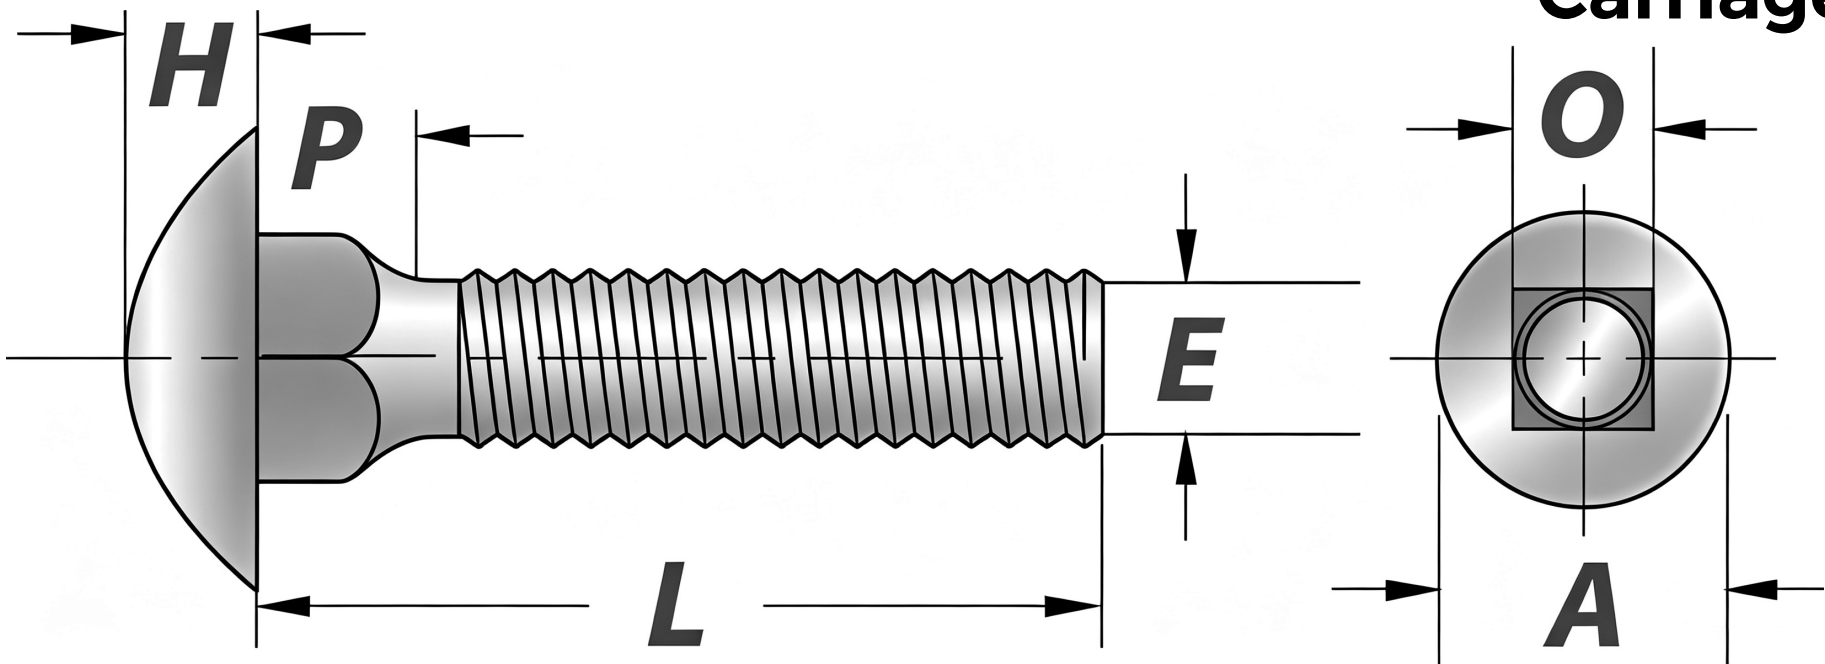

d (diameter)	3/16	1/4	5/16	3/8	7/16	1/2	5/8	3/4
thread/FPP	BSW-24	UNC-20	UNC-18	UNC-16	UNC-14	BSW-12	UNC-11	UNC-10
h (head height) max.	2,89	3,68	4,47	5,28	6,07	6,85	8,73	10,31
D (head diameter) max.	11,91	15,08	18,26	21,43	24,61	27,78	34,13	40,48
K (quadrilateral height) max.	3,17	3,96	4,74	5,56	6,35	7,13	8,73	10,31
v (width of square) max	5,05	6,60	8,22	9,85	11,48	13,08	16,30	19,50

b (thread length) ref. Se L <= 2" rosca inteira | Se L > 2", 50 mm mín.

Carriage Bolt

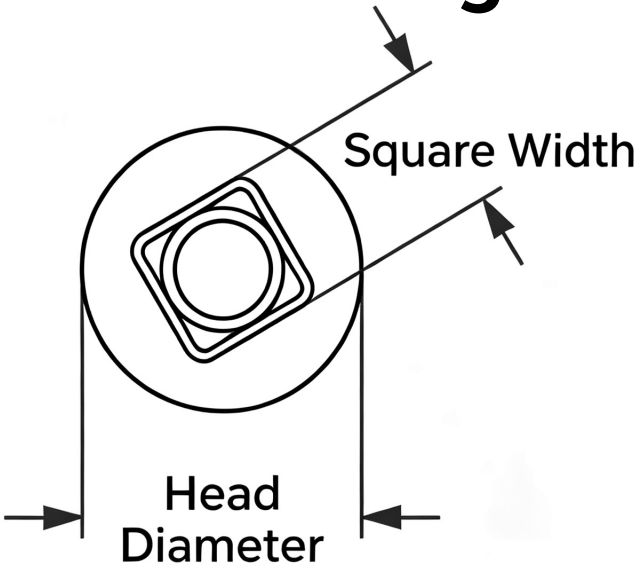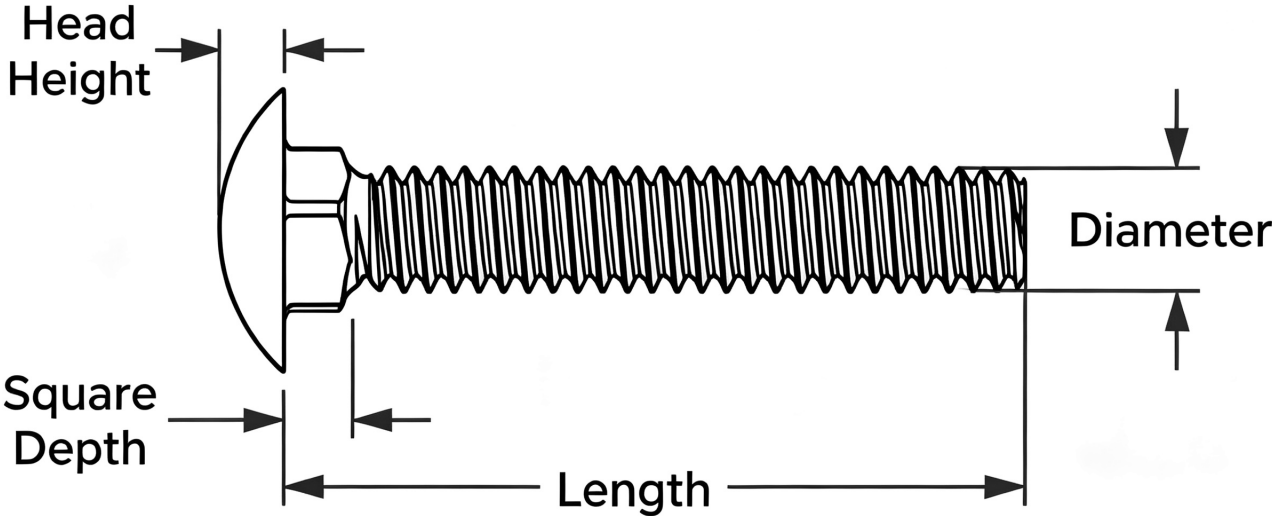

d (diameter)	M6	M8	M10	M12
thread/FPP	MA-1,00	MA-1,25	MA-1,50	MA-1,75
h (head height) max.	3,88	4,88	5,38	6,95
D (head diameter) max.	16,55	20,65	24,65	30,65
K (quadrilateral height) max.	4,60	5,60	6,60	8,75
v (width of square) max	6,48	8,58	10,58	12,70
b (thread length) ref.	18,00	22,00	26,00	30,00