


## Size 32A Sleeve housing, Lateral opening hole

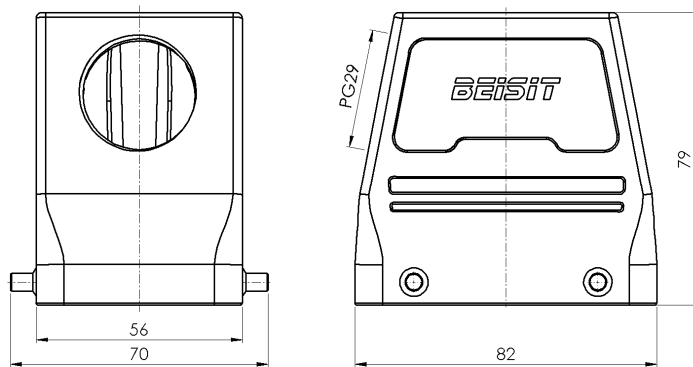

Typecode     H32A-SO-4P-PG29  
ID             1 007 01 0000094

### Technical Data

#### Product Properties

|                         |                     |
|-------------------------|---------------------|
| Series                  | Size 32A            |
| Mating with             | HA-032, HD-050      |
| Housing type            | Sleeve housing      |
| Cable outlets direction | Single-side opening |
| Cable outlets           | PG29                |
| Protection Class        | IP65                |
| Impact strength         | IK08                |
| Temperature range       | -40 °C ... 125 °C   |
| Standard                | DIN EN 175301-801   |

#### Insert

|                  |                   |
|------------------|-------------------|
| Housing material | Die-cast aluminum |
| Color            | Gray (RAL 7037)   |

#### Commercial data

|                   |          |
|-------------------|----------|
| Weight            | 0.219 kg |
| Packaging unit    | 1 pc     |
| Country of origin | CN       |

### Features

- Die casting of aluminum
- Single-side opening
- Resistant to salt spray
- Approval: UL94-V0
- RoHS-compliant

\*这里所列的是设计数据，有关产品的变更不在此做说明，未尽事宜请联系客服。用户有责任验证功能、符合适用的法律和指令以及在特定应用中的电气安全。